



Set Up Instructions

CSNRB-100L


Step 1: Assemble all straight pipes with bungee cords by pushing and pulling together.

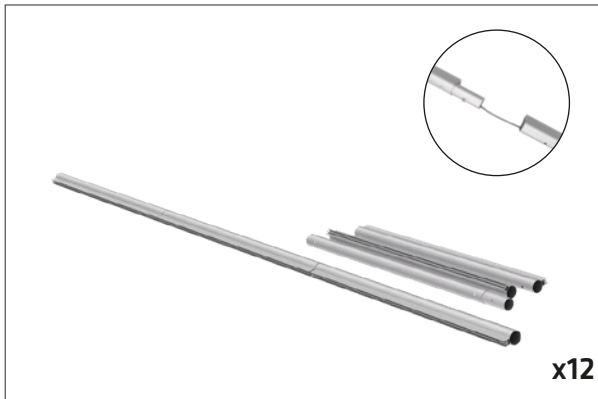


Step 2: Connect all corner sections to straight sections of the frame. Blue pipes represent the vertical pole position and should face up and down.

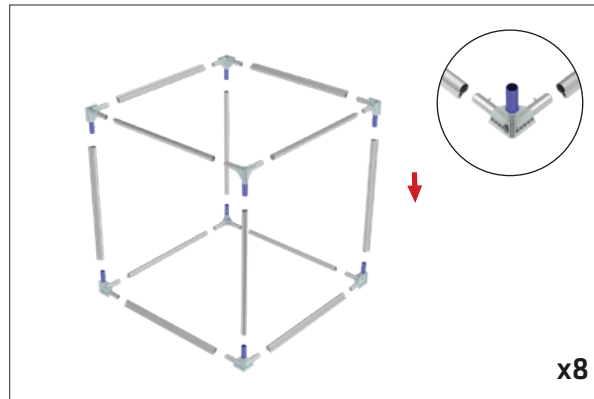


Step 3: At the top of the frame attach cable to opposite corners. Complete task twice to form an X.

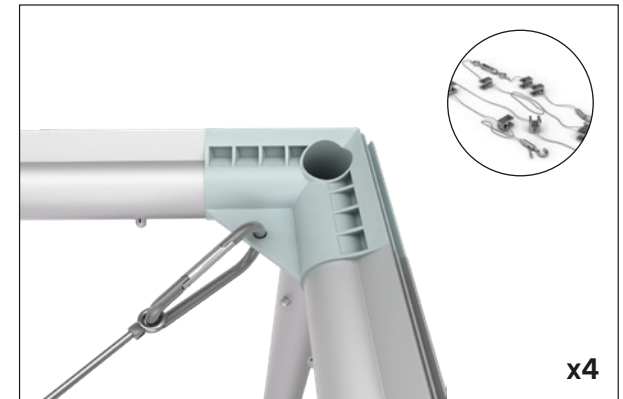


Step 4: Move to the center of cable and hand tighten turnbuckle to remove any remaining slack. Do not over tighten.

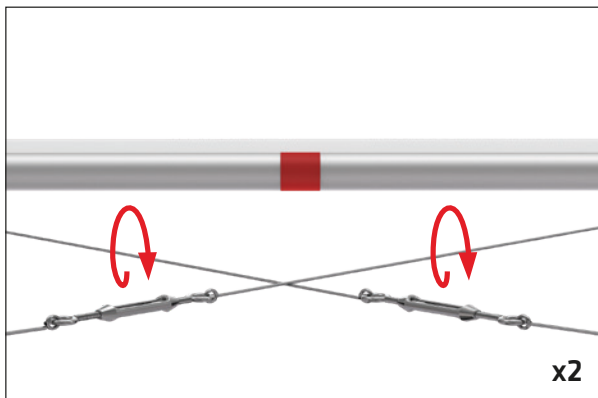

LED Light Arrays



Step 5: Take out the LED Light Arrays and add to cable with power connector on top. The cable blocks can be adjusted by pushing the **pin into the block** and sliding the block along the cable into desired position.

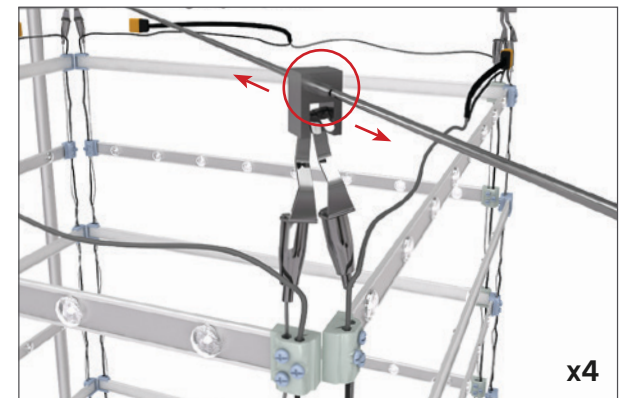


Set Up Instructions

CSNRB-100L


Step 6: Completed vertical LED Light Arrays assembly.



Step 7: Attach bottom horizontal LED Light Array to 4 corners of vertical LED Light Arrays.

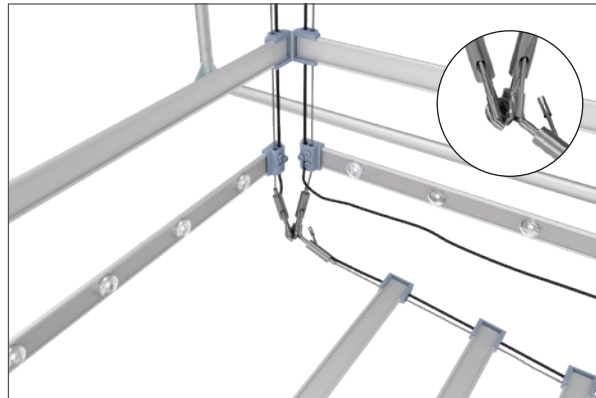


Step 8: Attach power cables between bottom and 1 vertical light array. Not all LED Light Arrays need to be plugged in at bottom. 3 plugs will hang freely.

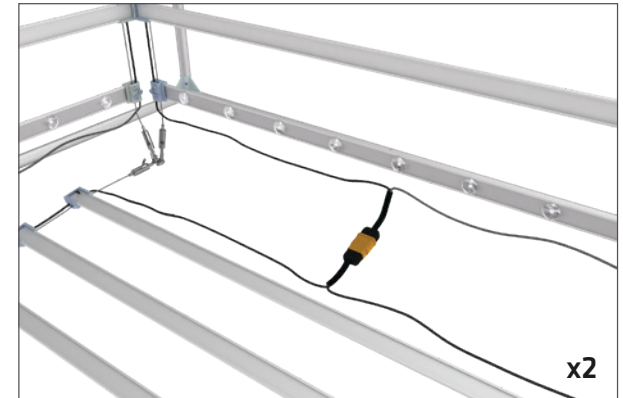


Use drop cloth on ground to prevent graphics from getting dirty!


Graphic Diagram

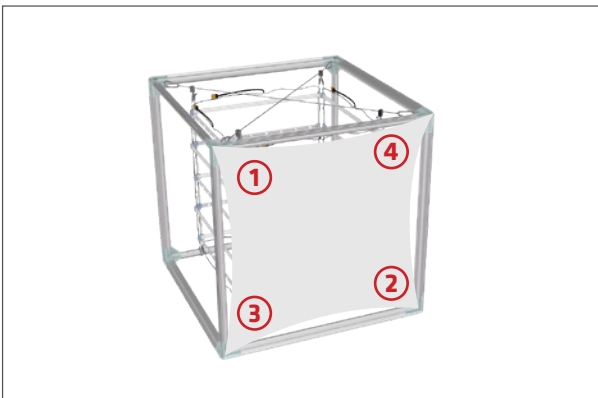

Step 9: Fold silicone edge graphics over an install into first corner of frame working outwards 4-6 inches. Repeat on remaining corners starting with the opposite corner. Follow the Graphic Diagram.

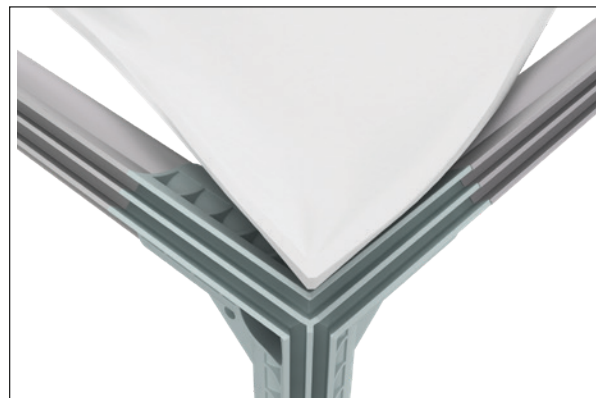

Step 10: Move to the center of each side of the frame to continue inserting the silicone edge graphics and work back toward the corners.

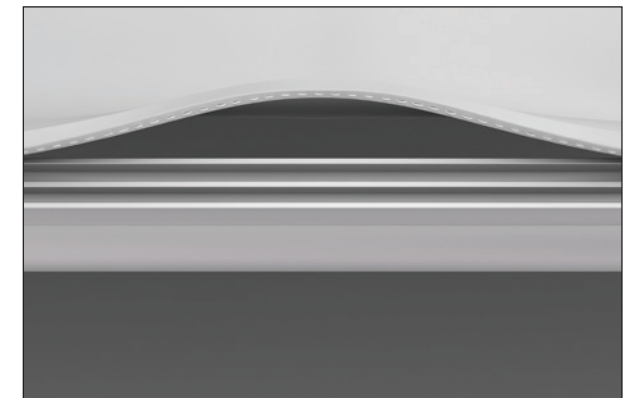


Set Up Instructions

CSNRB-100L


Step 11: Repeat Steps 9-10 on all 4 sides. Leave installation of bottom graphic until after the display has been wired with harness and lifted overhead into a position where it can be installed from the ground.



Step 12: Attach wiring harness to the same carabiners in 4 corners used for the light cables.

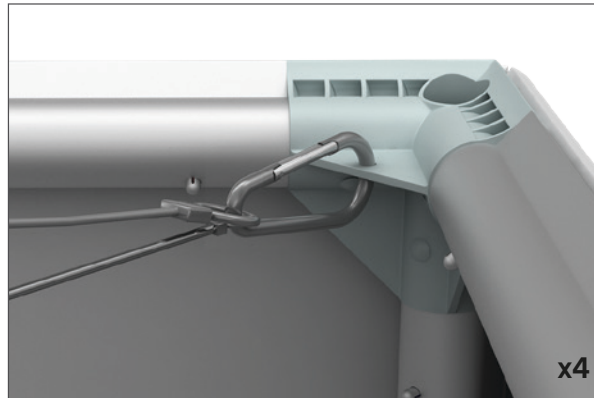


Step 13: **Attach power supply to hanging harness.** Plug the power supply into the top of LED Light Arrays using 2 plugs into 1 Y-Adapter. Repeat step.

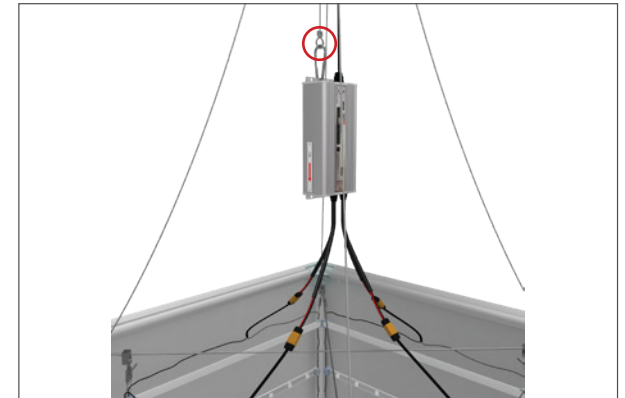

Step 14: Test lights if possible to make sure it has been wired properly.



Step 15: Lift display into position and install bottom graphic following Steps 9-10.

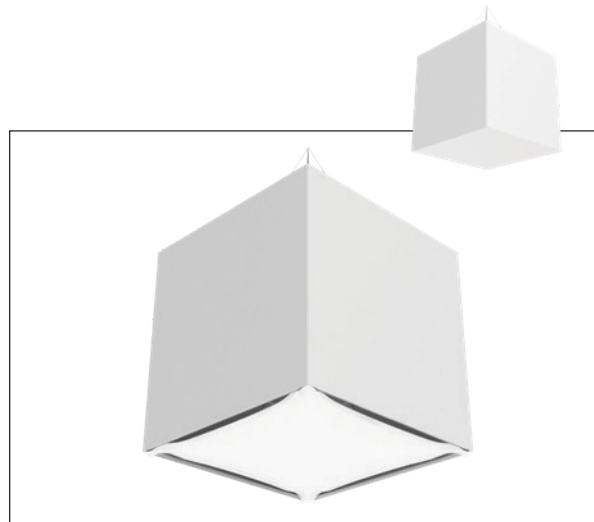

CAUTION!


Do not connect lights to power when lights are rolled up. Hang lights on frame before connecting to power for testing.



Set Up Instructions


CSNRB-100M

Step 1: Assemble all straight pipes with bungee cords by pushing and pulling together.

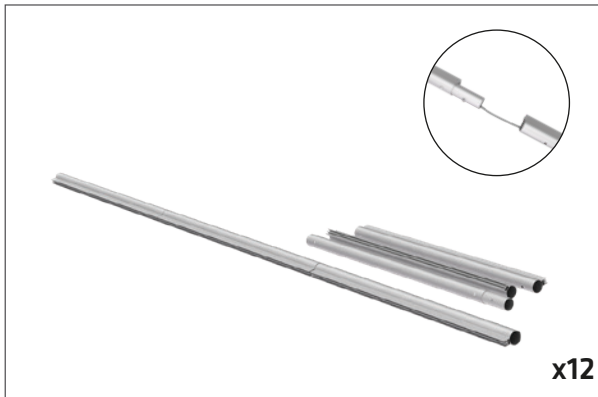


Step 2: Build the bottom first.

Connect all corner sections to straight sections of the frame. Blue pipes represent the vertical pole position and should face up.

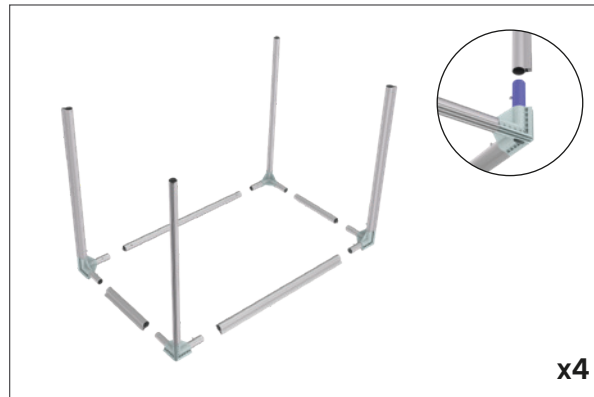


Step 3: Build the top next.


Connect all corner sections to straight sections of the frame. Blue pipes represent the vertical pole position and should face down. Connect top and bottom frames together.

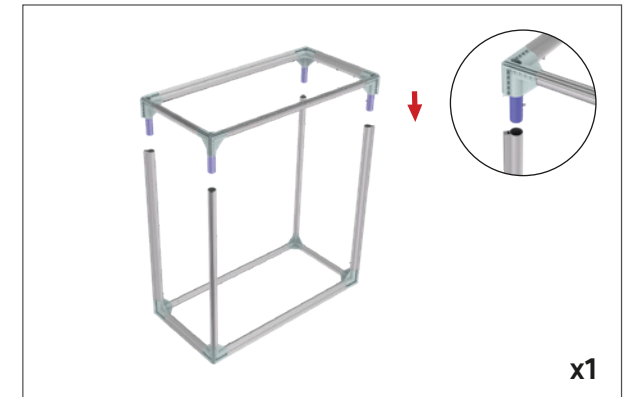


Step 4: At the top of the frame attach cable to left and right side. Tighten or loosen with hand pull.

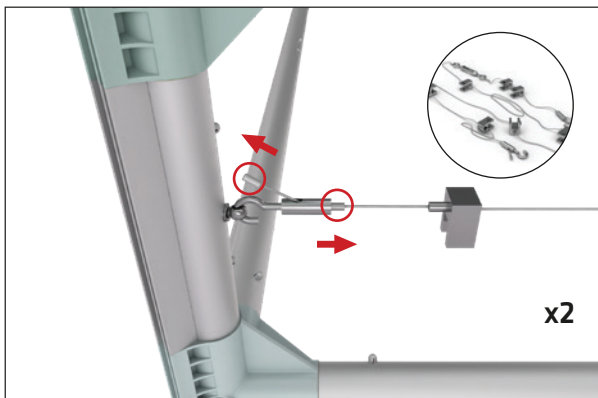

Step 5: Move to the center of cable and hand tighten remaining turn buckle to remove any remaining slack. Do not over tighten.

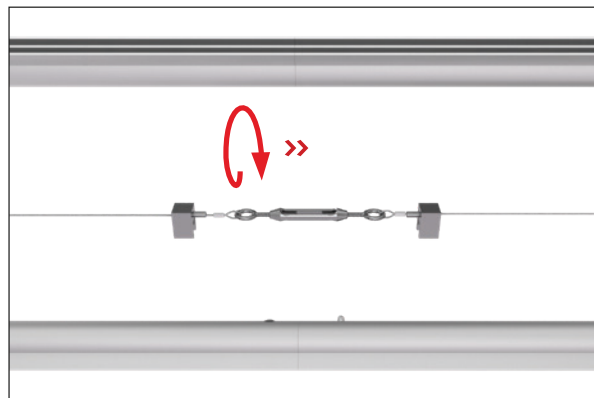

LED Light Arrays




Set Up Instructions

CSNRB-100M

Step 6: Take out the LED Light Arrays and add to cable with power connector on top. The cable blocks can be adjusted by pushing the **pin into the block** and sliding the block into desired position.

LED Light Arrays do not attach to bottom of frame, but hang under their own weight in final upright position.

Step 7: Completed frame with LED Light Array attached to cable harness.



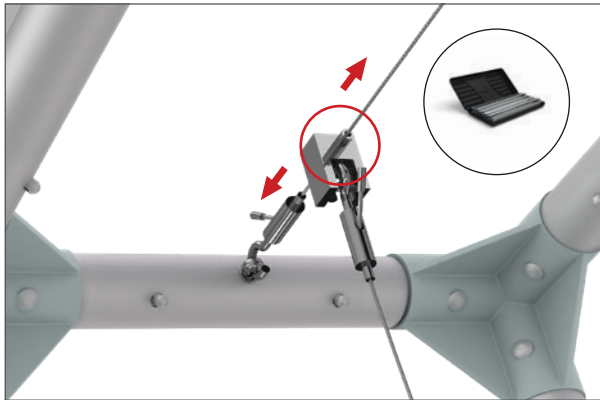


Use drop cloth on ground to prevent graphics from getting dirty!

Graphic Diagram

Step 8: Fold silicone edge graphics over an install into first corner of frame working outwards 4-6 inches. Repeat on remaining corners starting with the opposite corner. Follow the Graphic Diagram.

Step 9: Move to the center of each side of the frame to continue inserting the silicone edge graphics and work back toward the corners.

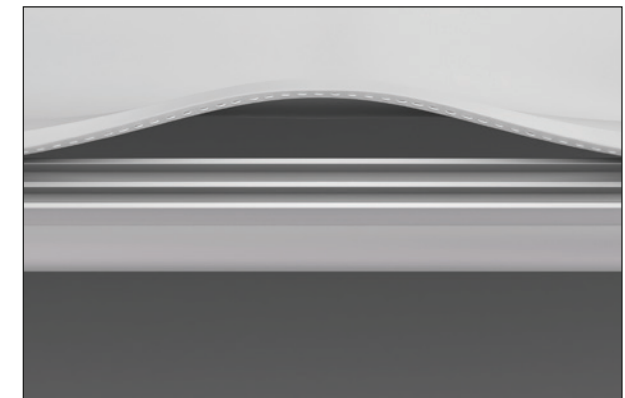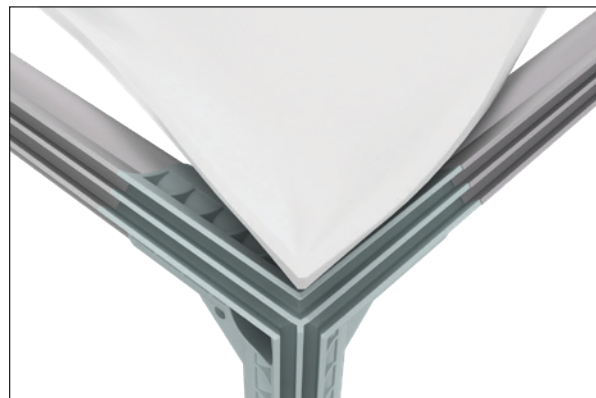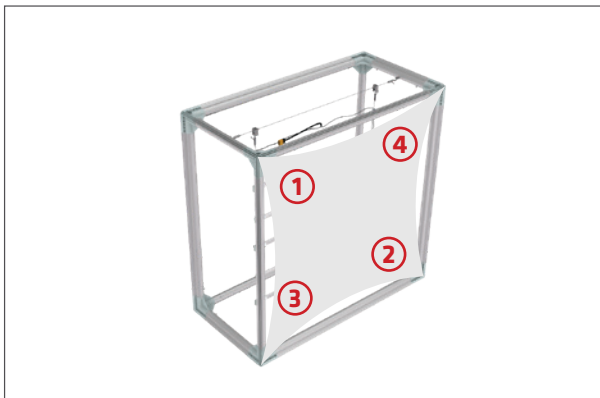

Set Up Instructions

CSNRB-100M

Step 10: Repeat Steps 8-9 on all 4 sides. Leave installation of bottom graphic until after the display has been wired with harness and lifted overhead into a position where it can be installed from the ground.




Step 11: Attach wiring harness with carabiners to the top 4 corners of the frame.



Step 12: Plug power supply to the top of LED Light Array.



Step 13: Test lights if possible to make sure it has been wired properly.

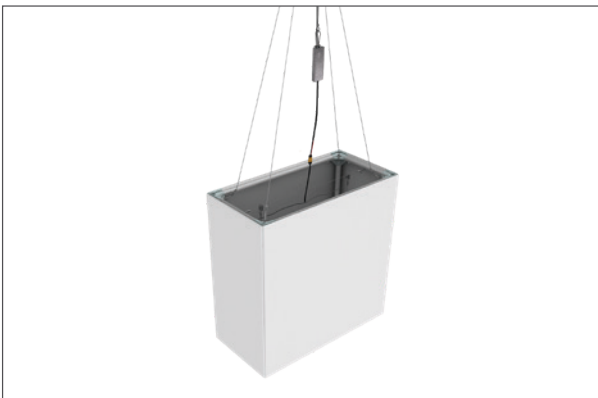

Step 14: Lift display into position and install bottom graphic following Steps 8-9.



CAUTION!


Do not connect lights to power when lights are rolled up. Hang lights on frame before connecting to power for testing.




Set Up Instructions

CSNRB-200L


Step 1: Assemble all straight pipes with bungee cords by pushing and pulling together.

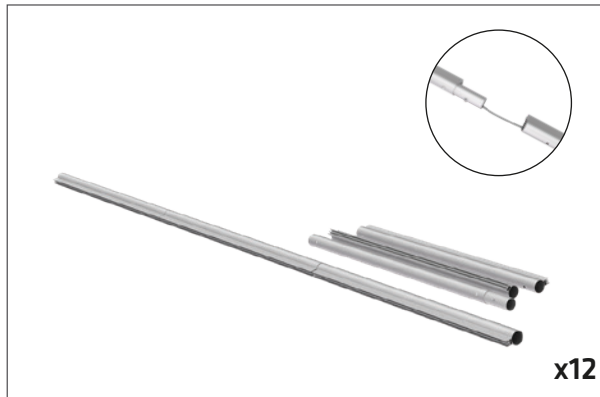


Step 2: Connect all corner sections to straight sections of the frame. Blue pipes represent the vertical pole position and should face up and down.

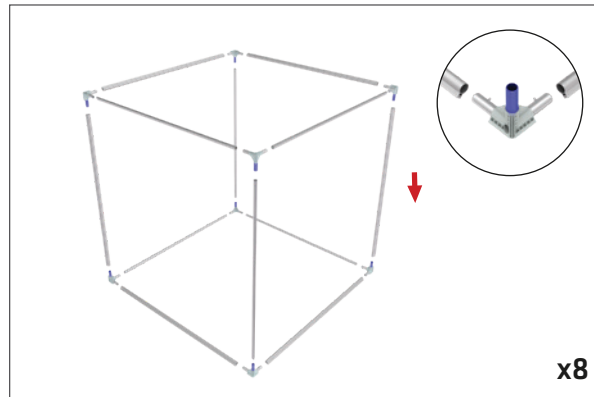


Step 3: At the top of the frame attach cable to opposite corners. Complete task twice to form an X.

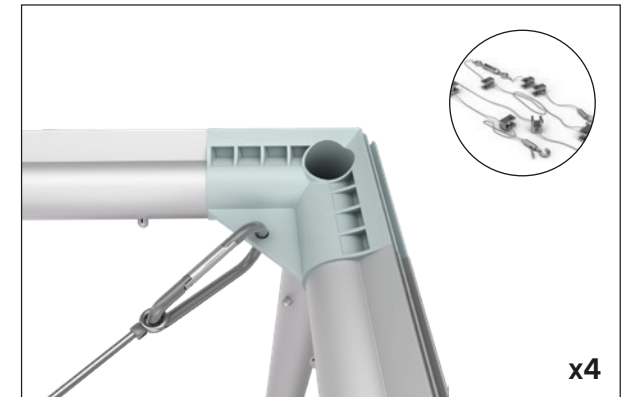



Step 4: Move to the center of cable and hand tighten turnbuckle to remove any remaining slack. Do not over tighten.

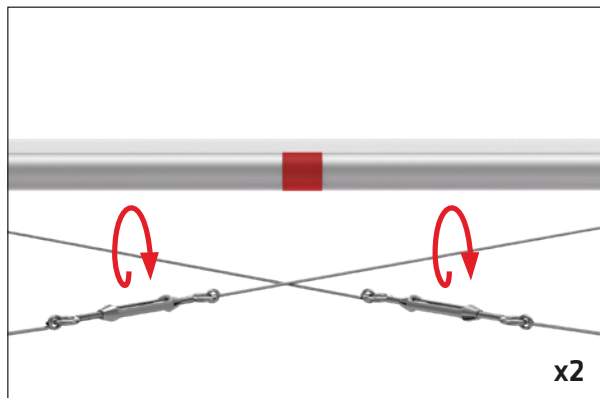

LED Light Arrays




Step 5: Take out the LED Light Arrays and add to cable with power connector on top. The cable blocks can be adjusted by pushing the **pin into the block** and sliding the block along the cable into desired position.

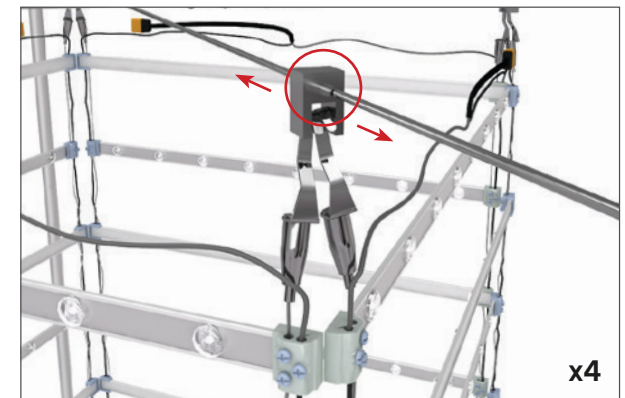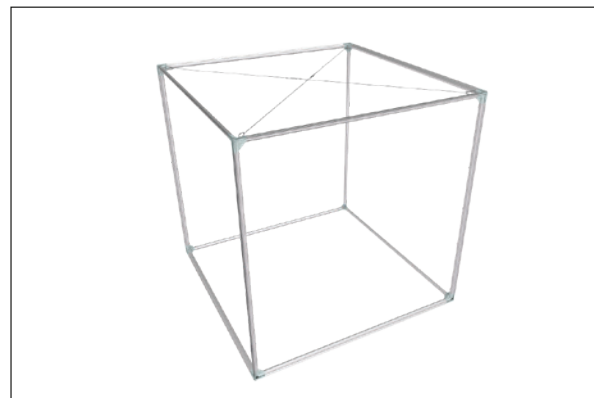


Set Up Instructions

CSNRB-200L


Step 6: Completed vertical LED Light Arrays assembly.

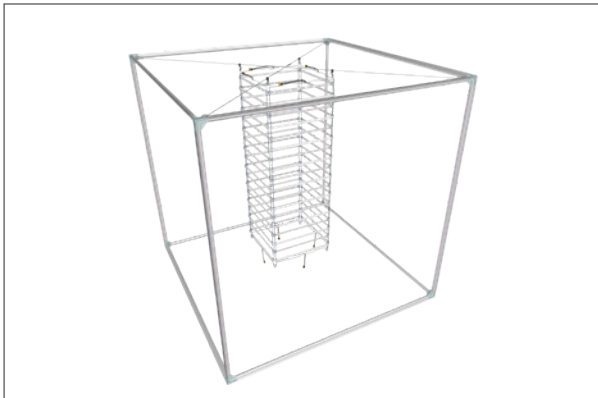

Step 7: Attach bottom horizontal LED Light Array to 4 corners of vertical LED Light Arrays.

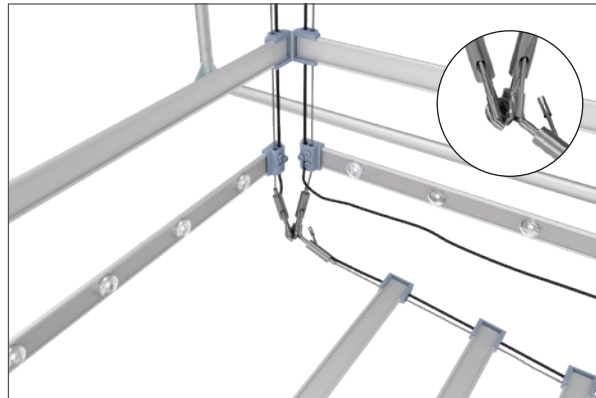


Step 8: Attach power cables between bottom and 1 vertical light array. Not all LED Light Arrays need to be plugged in at bottom. 3 plugs will hang freely.

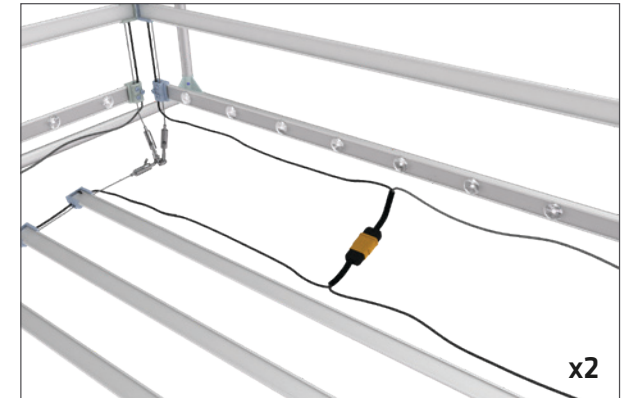


Use drop cloth on ground to prevent graphics from getting dirty!


Graphic Diagram

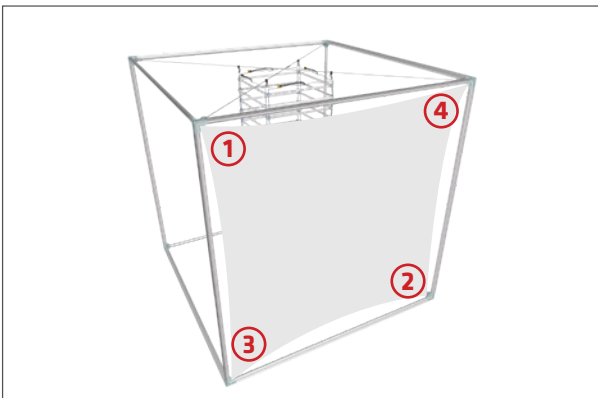

Step 9: Fold silicone edge graphics over an install into first corner of frame working outwards 4-6 inches. Repeat on remaining corners starting with the opposite corner. Follow the Graphic Diagram.

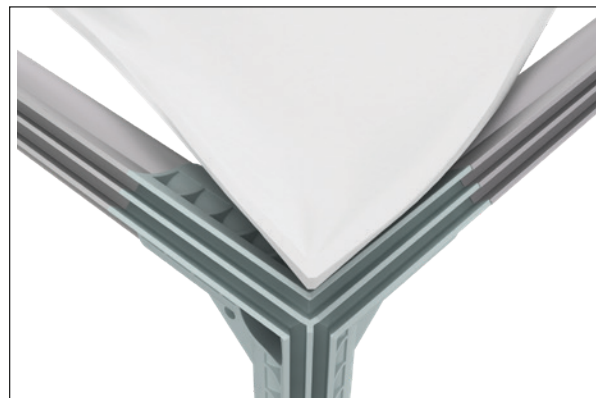

Step 10: Move to the center of each side of the frame to continue inserting the silicone edge graphics and work back toward the corners.

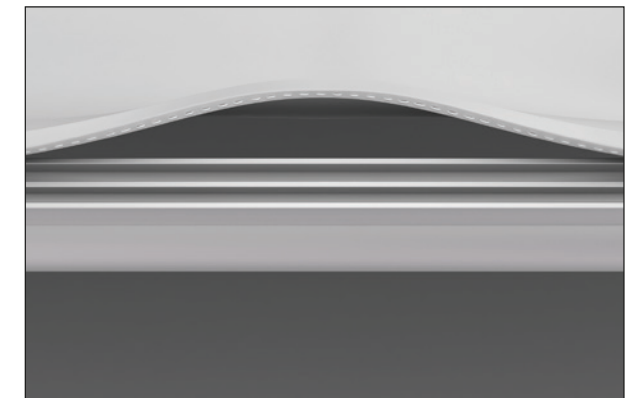


Set Up Instructions

CSNRB-200L


Step 11: Repeat Steps 9-10 on all 4 sides. Leave installation of bottom graphic until after the display has been wired with harness and lifted overhead into a position where it can be installed from the ground.



Step 12: Attach wiring harness to the same carabiners in 4 corners used for the light cables.

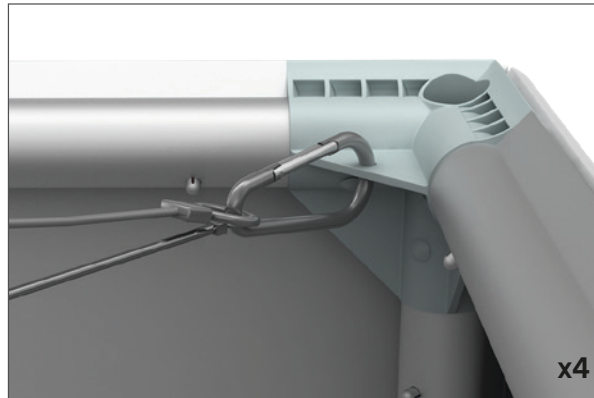


Step 13: Attach power supplies to hanging harness. Plug power supplies to the top of LED Light Arrays. 2 LED Light Arrays per 1 power supply.

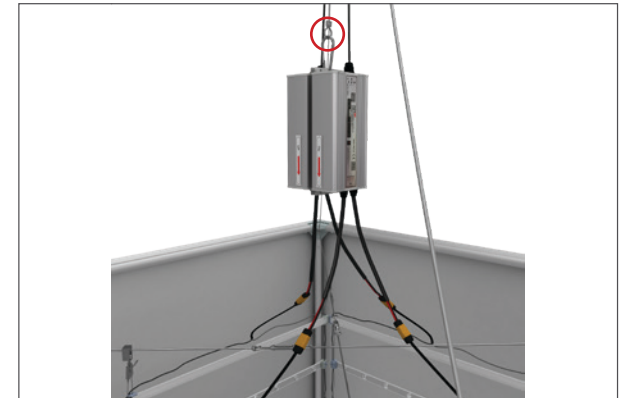

Step 14: Test lights if possible to make sure it has been wired properly.



Step 15: Lift display into position and install bottom graphic following Steps 9-10.

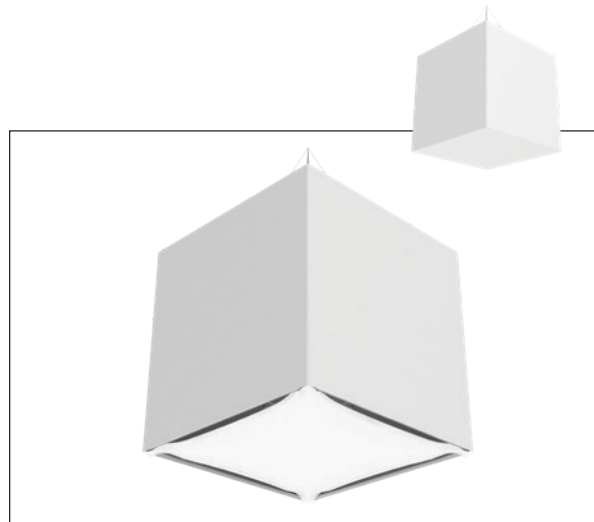

CAUTION!


Do not connect lights to power when lights are rolled up. Hang lights on frame before connecting to power for testing.



Set Up Instructions


CSNRB-200M

Step 1: Assemble all straight pipes with bungee cords by pushing and pulling together.

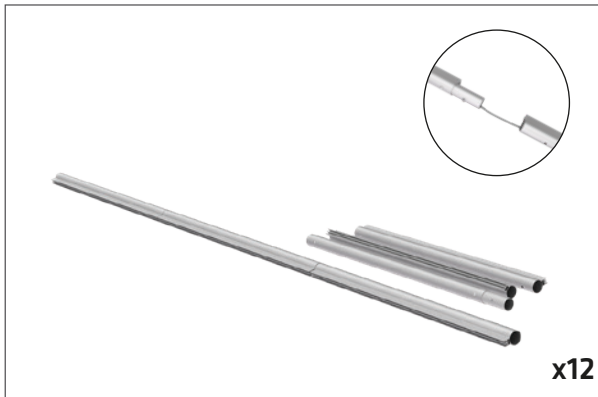


Step 2: Build the bottom first.

Connect all corner sections to straight sections of the frame. Blue pipes represent the vertical pole position and should face up.

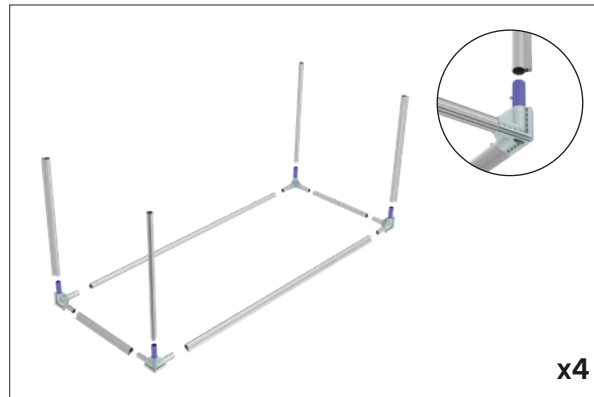


Step 3: Build the top next.


Connect all corner sections to straight sections of the frame. Blue pipes represent the vertical pole position and should face down. Connect top and bottom frames together.

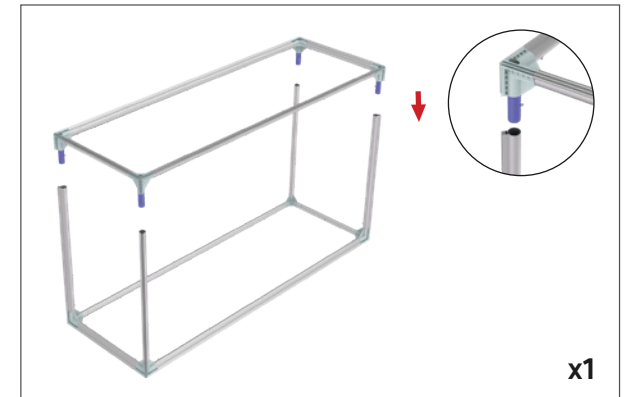


Step 4: At the top of the frame attach cable to left and right side. Tighten or loosen with hand pull.

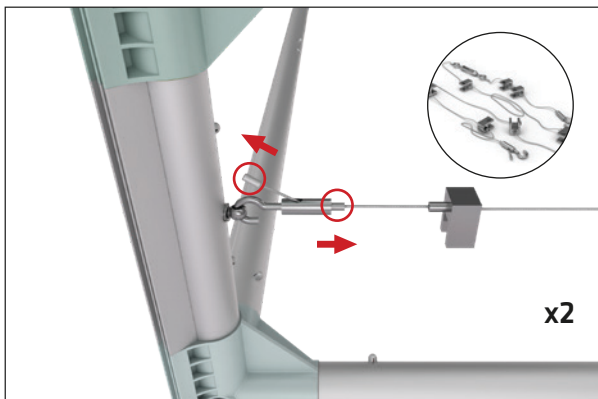

Step 5: Move to the center of cable and hand tighten remaining turn buckle to remove any remaining slack. Do not over tighten.

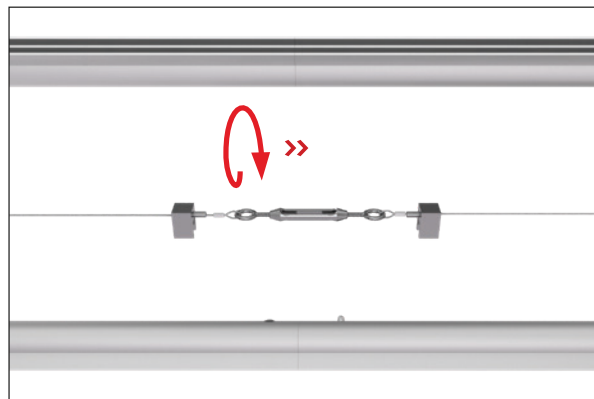


LED Light Arrays



Set Up Instructions

CSNRB-200M

Step 6: Take out the LED Light Arrays and add to cable with power connector on top. The cable blocks can be adjusted by pushing the **pin into the block** and sliding the block into desired position.

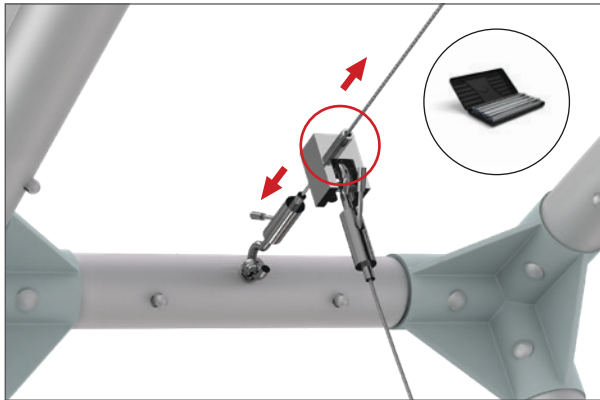

Repeat until all Light Arrays are attached. LED Light Arrays do not attach to bottom of frame, but hang under their own weight in final upright position.




Step 7: Completed frame with LED Light Arrays attached to cable harness.




Use drop cloth on ground to prevent graphics from getting dirty!


Graphic Diagram

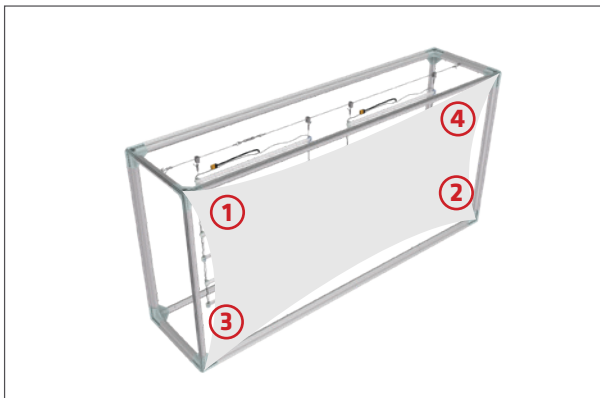

Step 8: Fold silicone edge graphics over an install into first corner of frame working outwards 4-6 inches. Repeat on remaining corners starting with the opposite corner. Follow the Graphic Diagram.

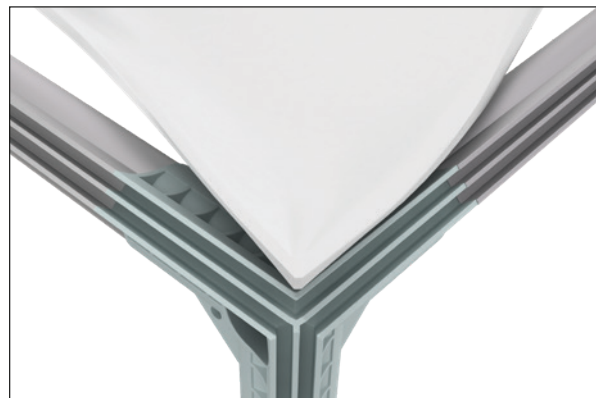

Step 9: Move to the center of each side of the frame to continue inserting the silicone edge graphics and work back toward the corners.

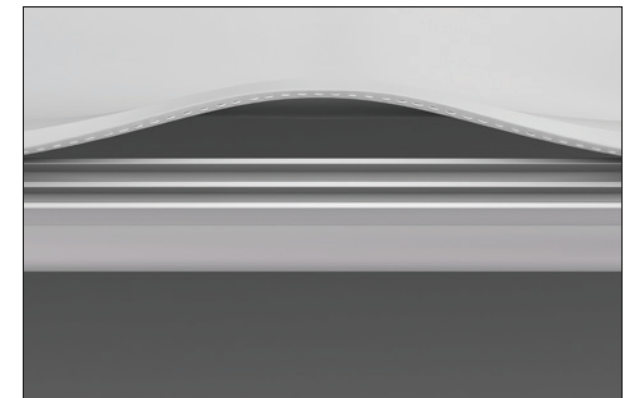

Set Up Instructions

CSNRB-200M


Step 10: Repeat Steps 8-9 on all 4 sides. Leave installation of bottom graphic until after the display has been wired with harness and lifted overhead into a position where it can be installed from the ground.




Step 11: Attach wiring harness with carabiners to the top 4 corners of the frame.




Step 12: Plug power supply to the top of LED Light Array using 2 plugs into 1 Y-Adapter.

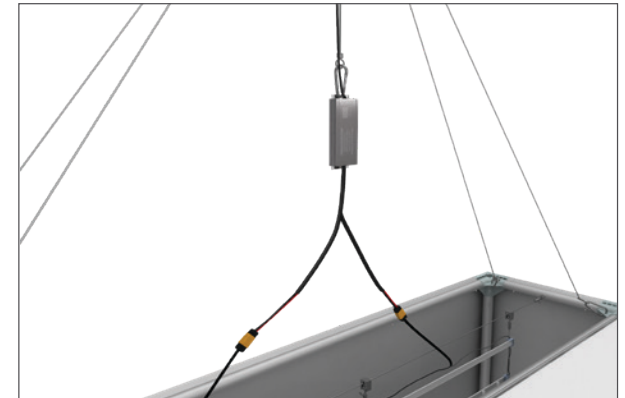

Step 143: Test lights if possible to make sure display has been wired properly.

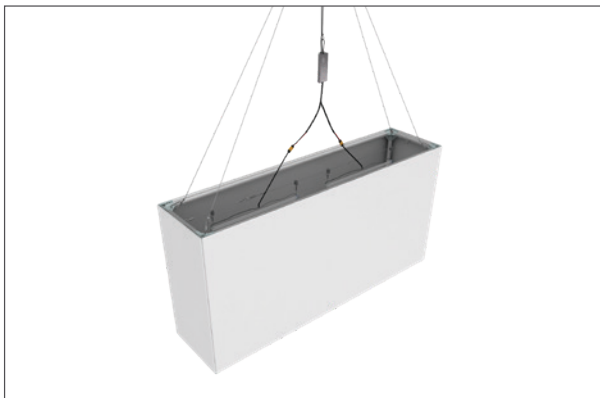

Step 14: Lift display into position and install bottom graphic following Steps 8-9.

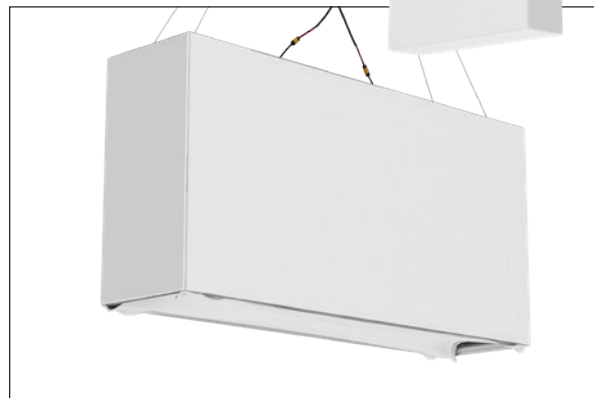

CAUTION!


Do not connect lights to power when lights are rolled up. Hang lights on frame before connecting to power for testing.




Set Up Instructions

CSNRB-240L


Step 1: Assemble all straight pipes with bungee cords by pushing and pulling together.

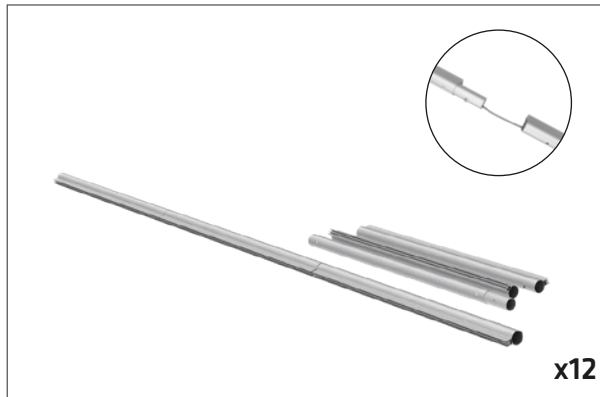


Step 2: Connect all corner sections to straight sections of the frame. Blue pipes represent the vertical pole position and should face up and down.

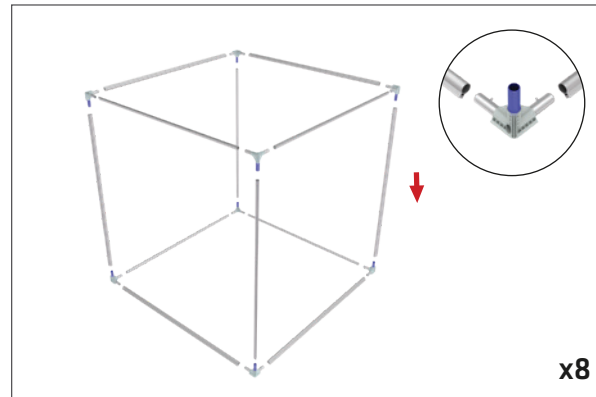


Step 3: At the top of the frame attach cable to opposite corners. Complete task twice to form an X.

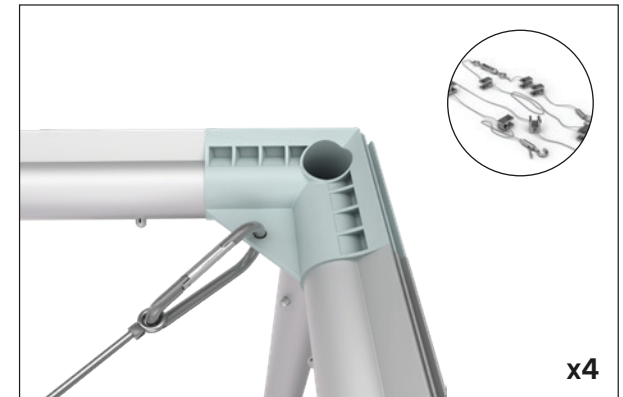



Step 4: Move to the center of cable and hand tighten turnbuckle to remove any remaining slack. Do not over tighten.

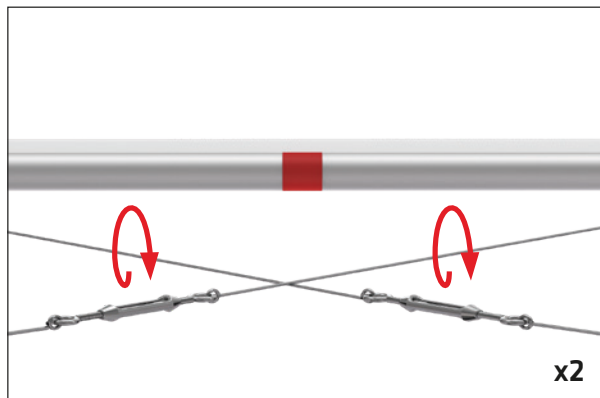

LED Light Arrays




Step 5: Take out the LED Light Arrays and add to cable with power connector on top. The cable blocks can be adjusted by pushing the **pin into the block** and sliding the block along the cable into desired position.

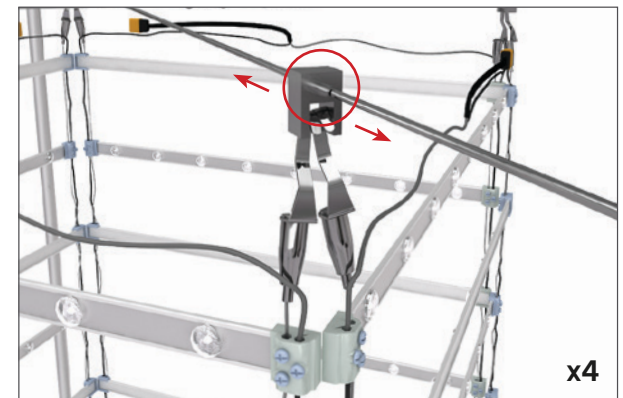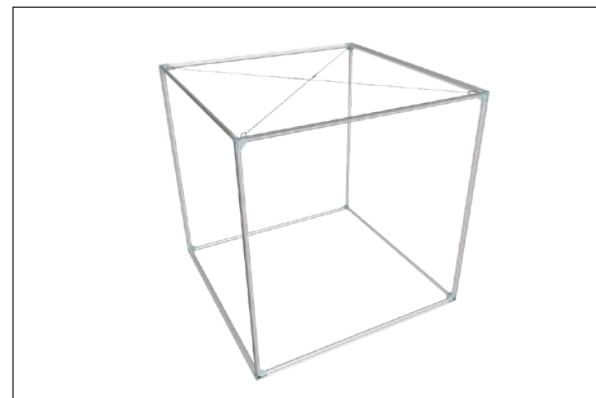


Set Up Instructions

CSNRB-240L


Step 6: Completed vertical LED Light Arrays assembly.

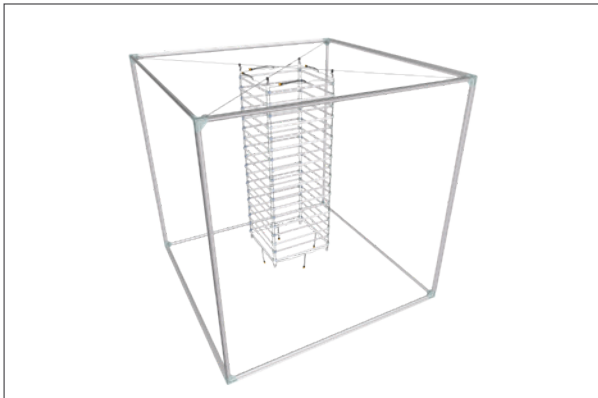

Step 7: Attach bottom horizontal LED Light Array to 4 corners of vertical LED Light Arrays.

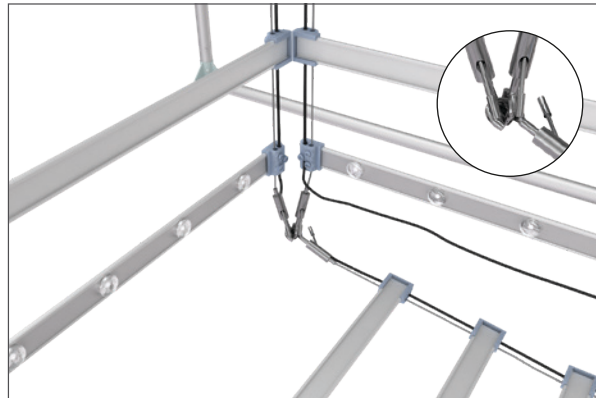


Step 8: Attach power cables between bottom and 1 vertical light array. Not all LED Light Arrays need to be plugged in at bottom. 3 plugs will hang freely.

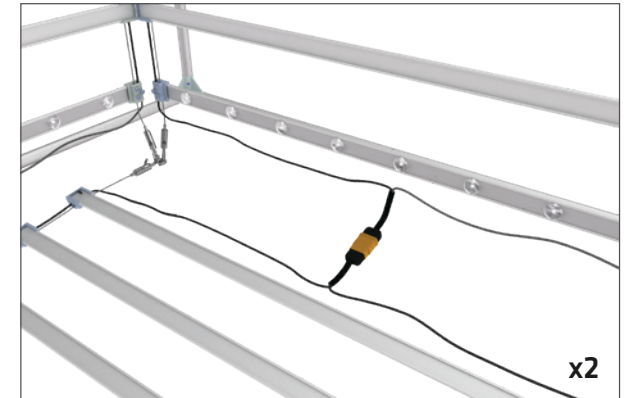


Use drop cloth on ground to prevent graphics from getting dirty!


Graphic Diagram

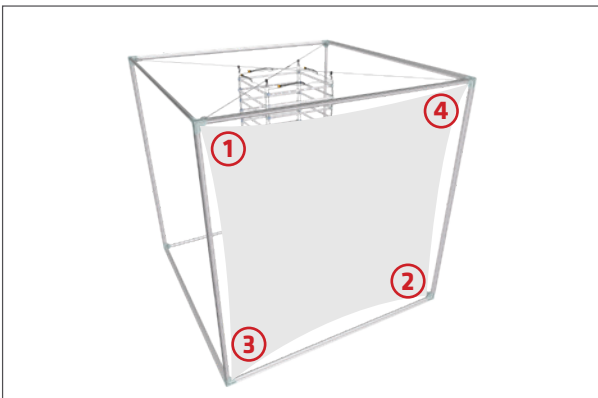

Step 9: Fold silicone edge graphics over an install into first corner of frame working outwards 4-6 inches. Repeat on remaining corners starting with the opposite corner. Follow the Graphic Diagram.

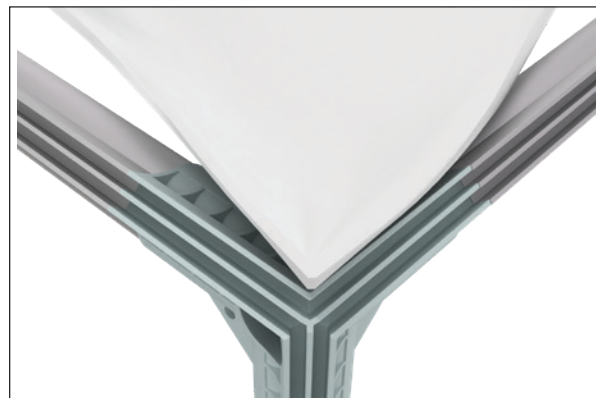

Step 10: Move to the center of each side of the frame to continue inserting the silicone edge graphics and work back toward the corners.

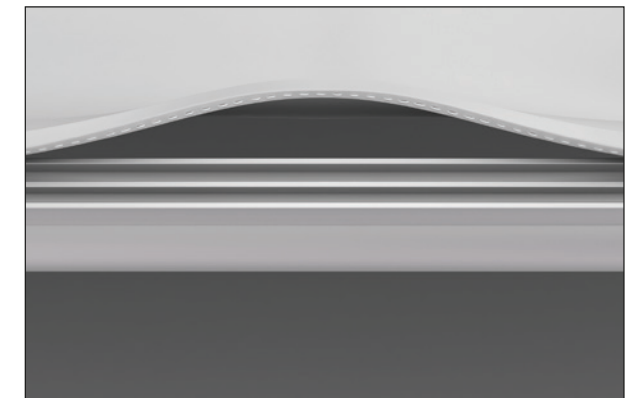


Set Up Instructions

CSNRB-240L


Step 11: Repeat Steps 9-10 on all 4 sides. Leave installation of bottom graphic until after the display has been wired with harness and lifted overhead into a position where it can be installed from the ground.




Step 12: Attach wiring harness to the same carabiners in 4 corners used for the light cables.

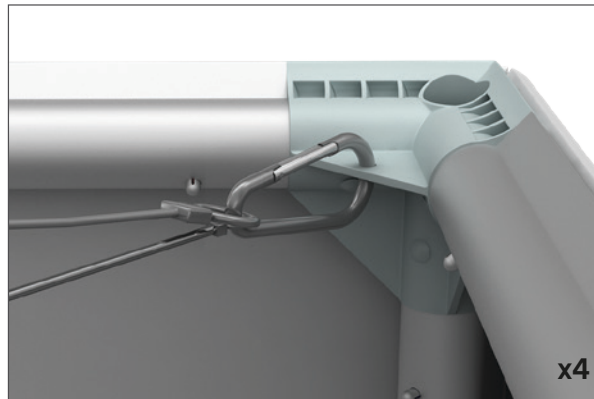


Step 13: Attach power supplies to hanging harness. Plug power supplies to the top of LED Light Arrays. 2 LED Light Arrays per 1 power supply.

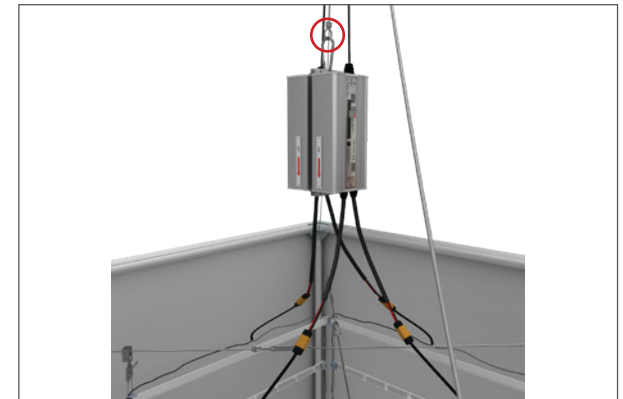

Step 14: Test lights if possible to make sure it has been wired properly.

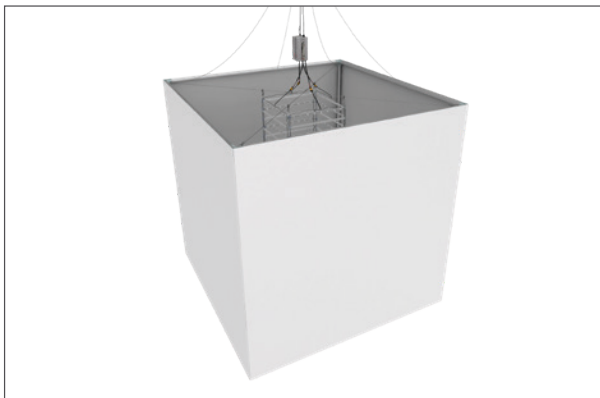

Step 15: Lift display into position and install bottom graphic following Steps 9-10.

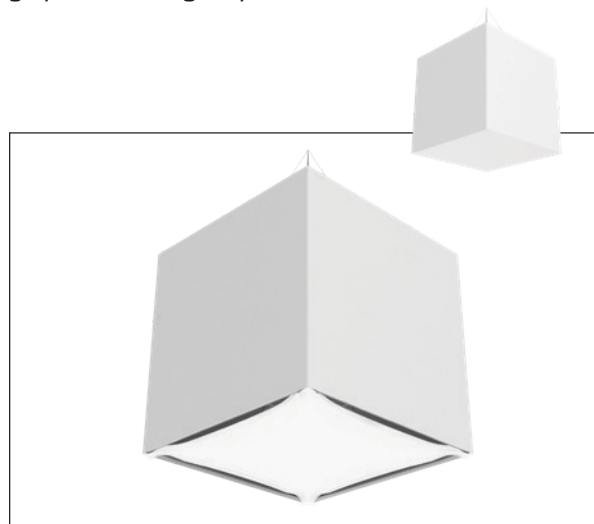

CAUTION!


Do not connect lights to power when lights are rolled up. Hang lights on frame before connecting to power for testing.



Set Up Instructions


CSNRB-300M

Step 1: Assemble all straight pipes with bungee cords by pushing and pulling together.

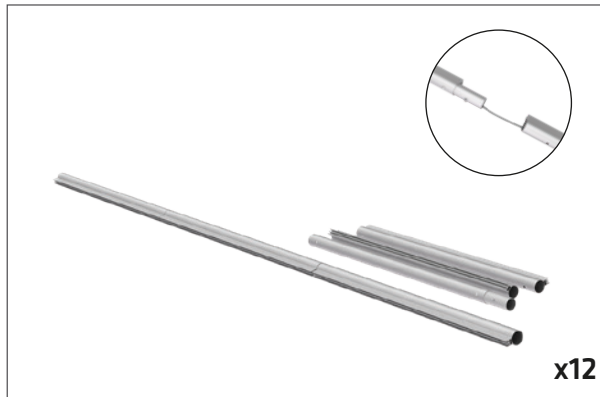


Step 2: Build the bottom first.

Connect all corner sections to straight sections of the frame. Blue pipes represent the vertical pole position and should face up.

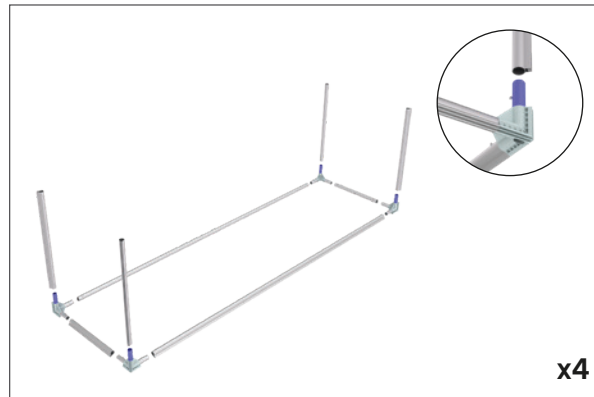


Step 3: Build the top next.


Connect all corner sections to straight sections of the frame. Blue pipes represent the vertical pole position and should face down. Connect top and bottom frames together.

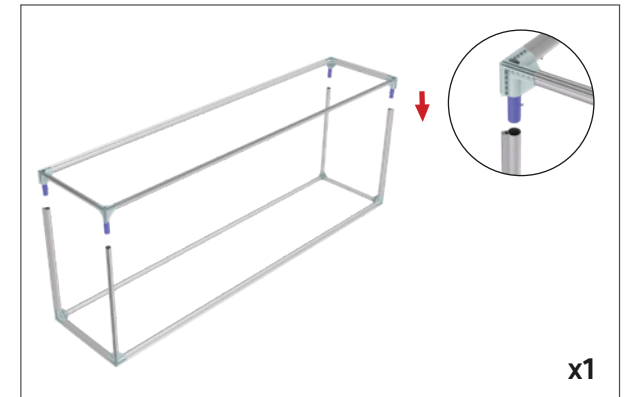


Step 4: At the top of the frame attach cable to left and right side. Tighten or loosen with hand pull.

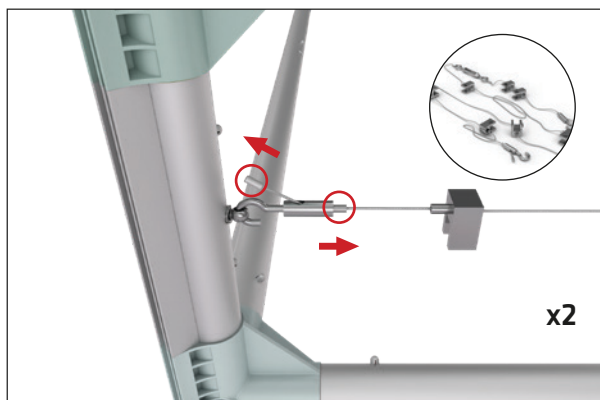

Step 5: Move to the center of cable and hand tighten remaining turn buckle to remove any remaining slack. Do not over tighten.

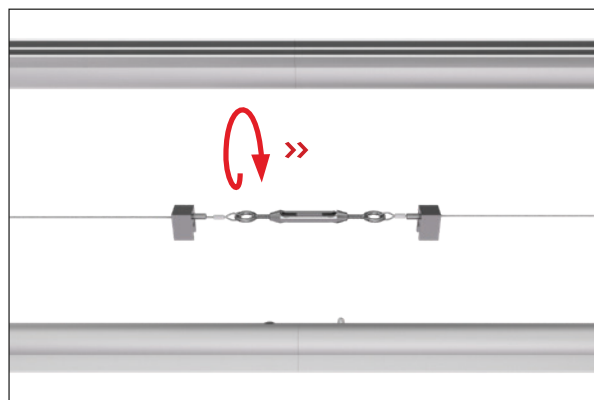


LED Light Arrays



Set Up Instructions

CSNRB-300M


Step 6: Take out the LED Light Arrays and add to cable with power connector on top. The cable blocks can be adjusted by pushing the **pin into the block** and sliding the block into desired position.

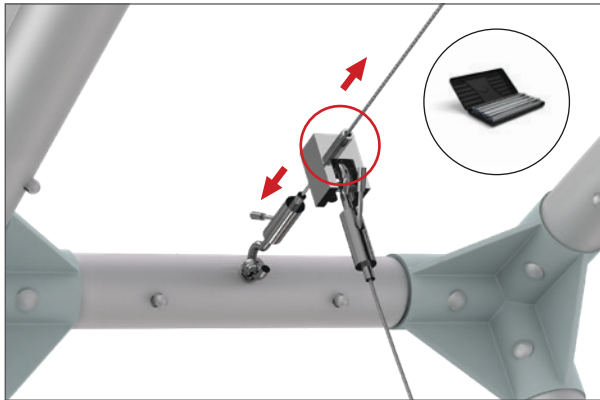


Repeat until all Light Arrays are attached. LED Light Arrays do not attach to bottom of frame, but hang under their own weight in final upright position.




Step 7: Completed frame with LED Light Arrays attached to cable harness.

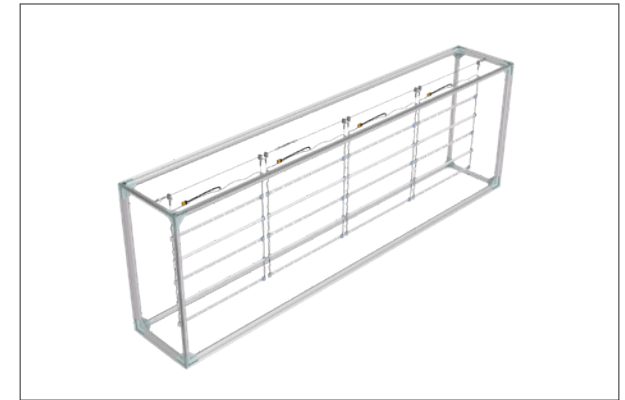


Step 8: Assemble center support brace by pushing and pulling together.

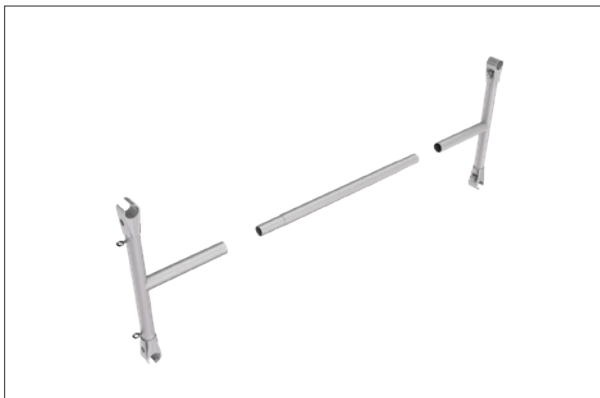

Step 9: Place center support brace into center of display frame.

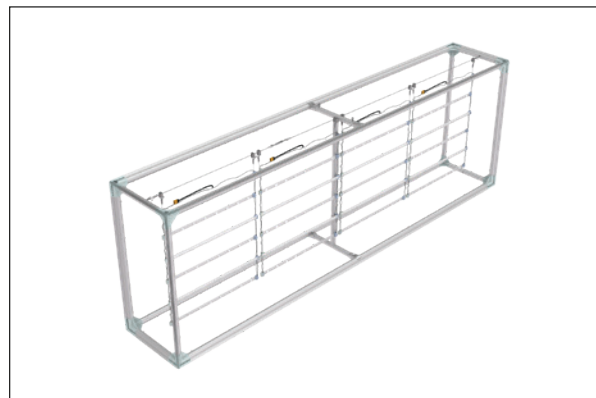

Step 10: Attach c-clamps to frame on top and bottom use hex tool. **Place eyelets on top of frame** for use with wiring harness.

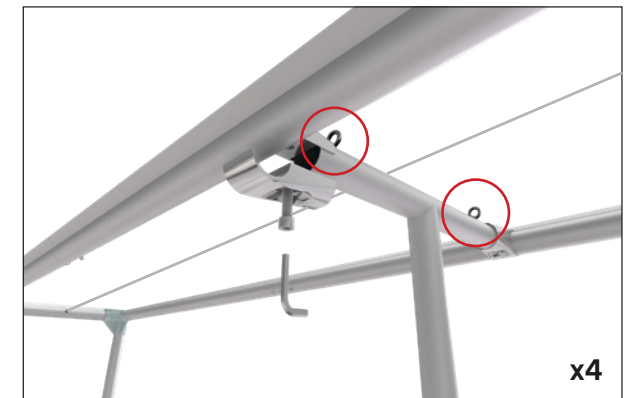


Set Up Instructions


CSNRB-300M

Use drop cloth on ground to prevent graphics from getting dirty!


Graphic Diagram

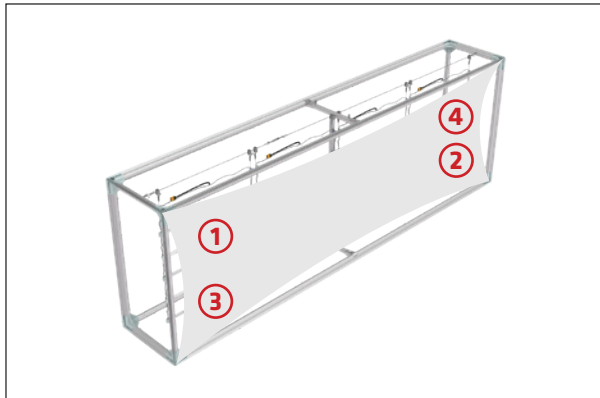

Step 11: Fold silicone edge graphics over and install into first corner of frame working outwards 4-6 inches. Repeat on remaining corners starting with the opposite corner. Follow the Graphic Diagram.

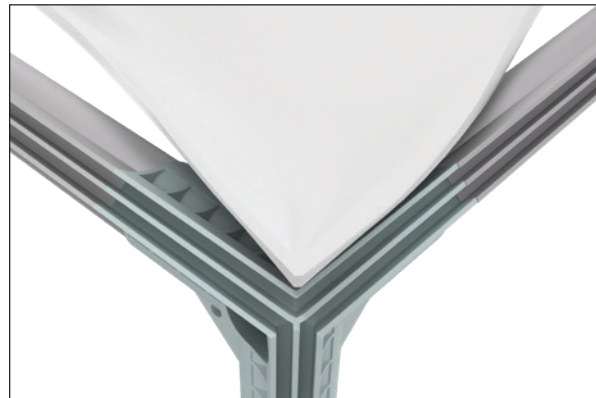


Step 12: Move to the center of each side of the frame to continue inserting the silicone edge graphics and work back toward the corners.

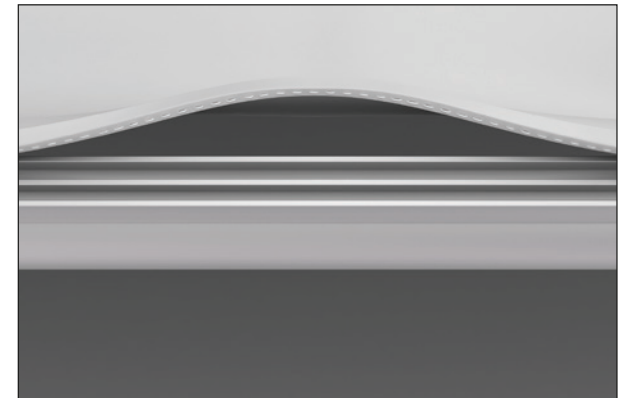

Step 13: Repeat Steps 11-12 on all 4 sides. Leave installation of bottom graphic until after the display has been wired with harness and lifted overhead into a position where it can be installed from the ground.

Step 14: Attach wiring harness with carabiners to the top 4 corners of the frame.

Step 15: Attach wiring harness with carabiners to the top 2 eyelets of center brace.

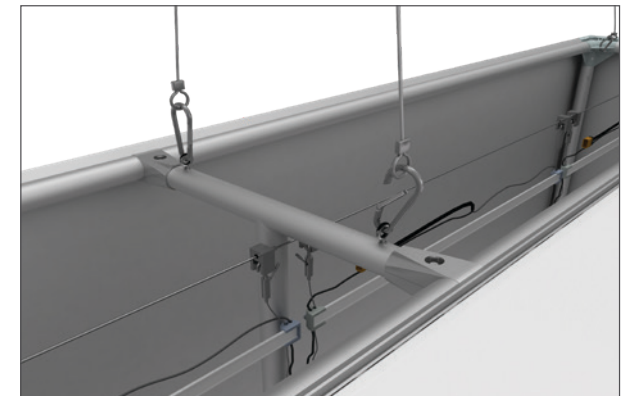




Set Up Instructions

CSNRB-300M

Step 16: Plug each power supply into the top of 2 LED Light Arrays using 2 plugs into 1 Y-Adapter.

Step 17: Test lights if possible to make sure it has been wired properly.

Step 18: Lift display into position and install bottom graphic following Steps 11-12.

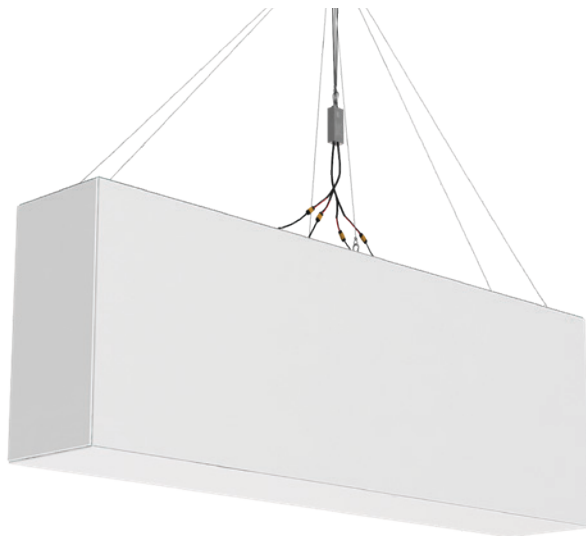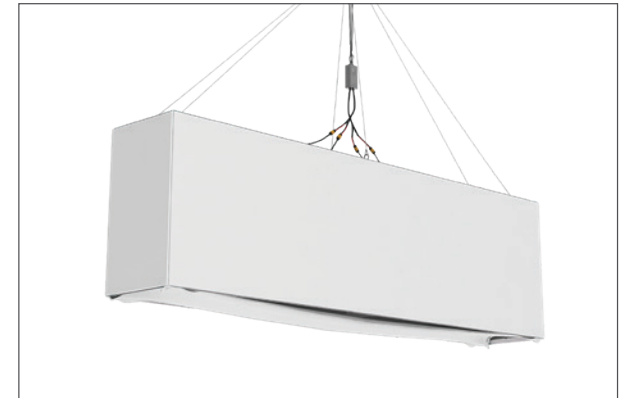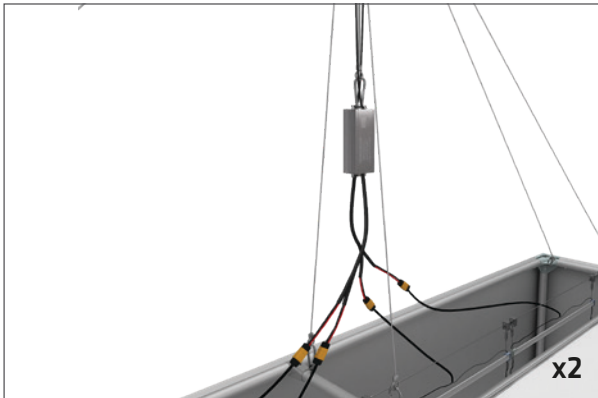

CAUTION!

Do not connect lights to power when lights are rolled up. Hang lights on frame before connecting to power for testing.

