
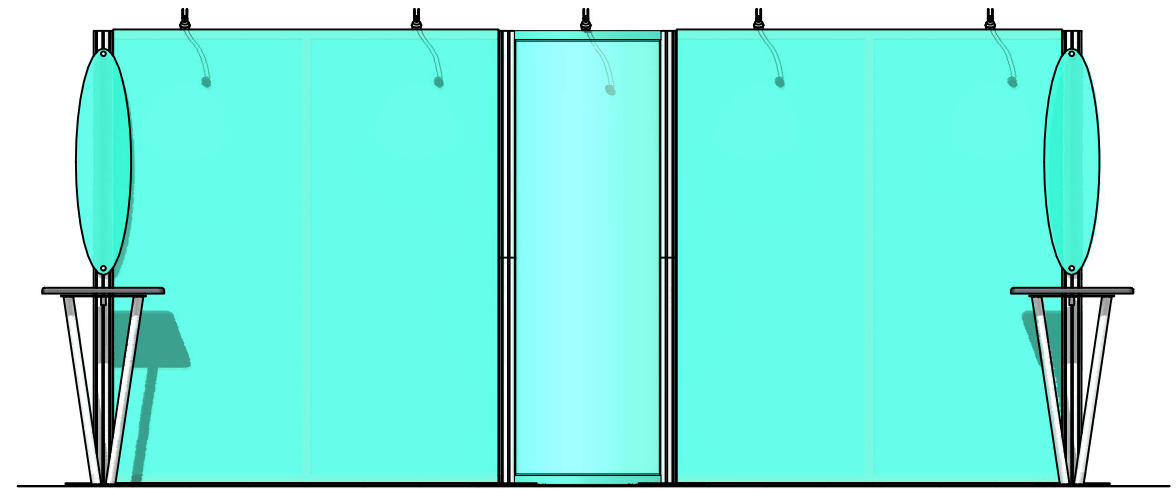


LINEAR 36

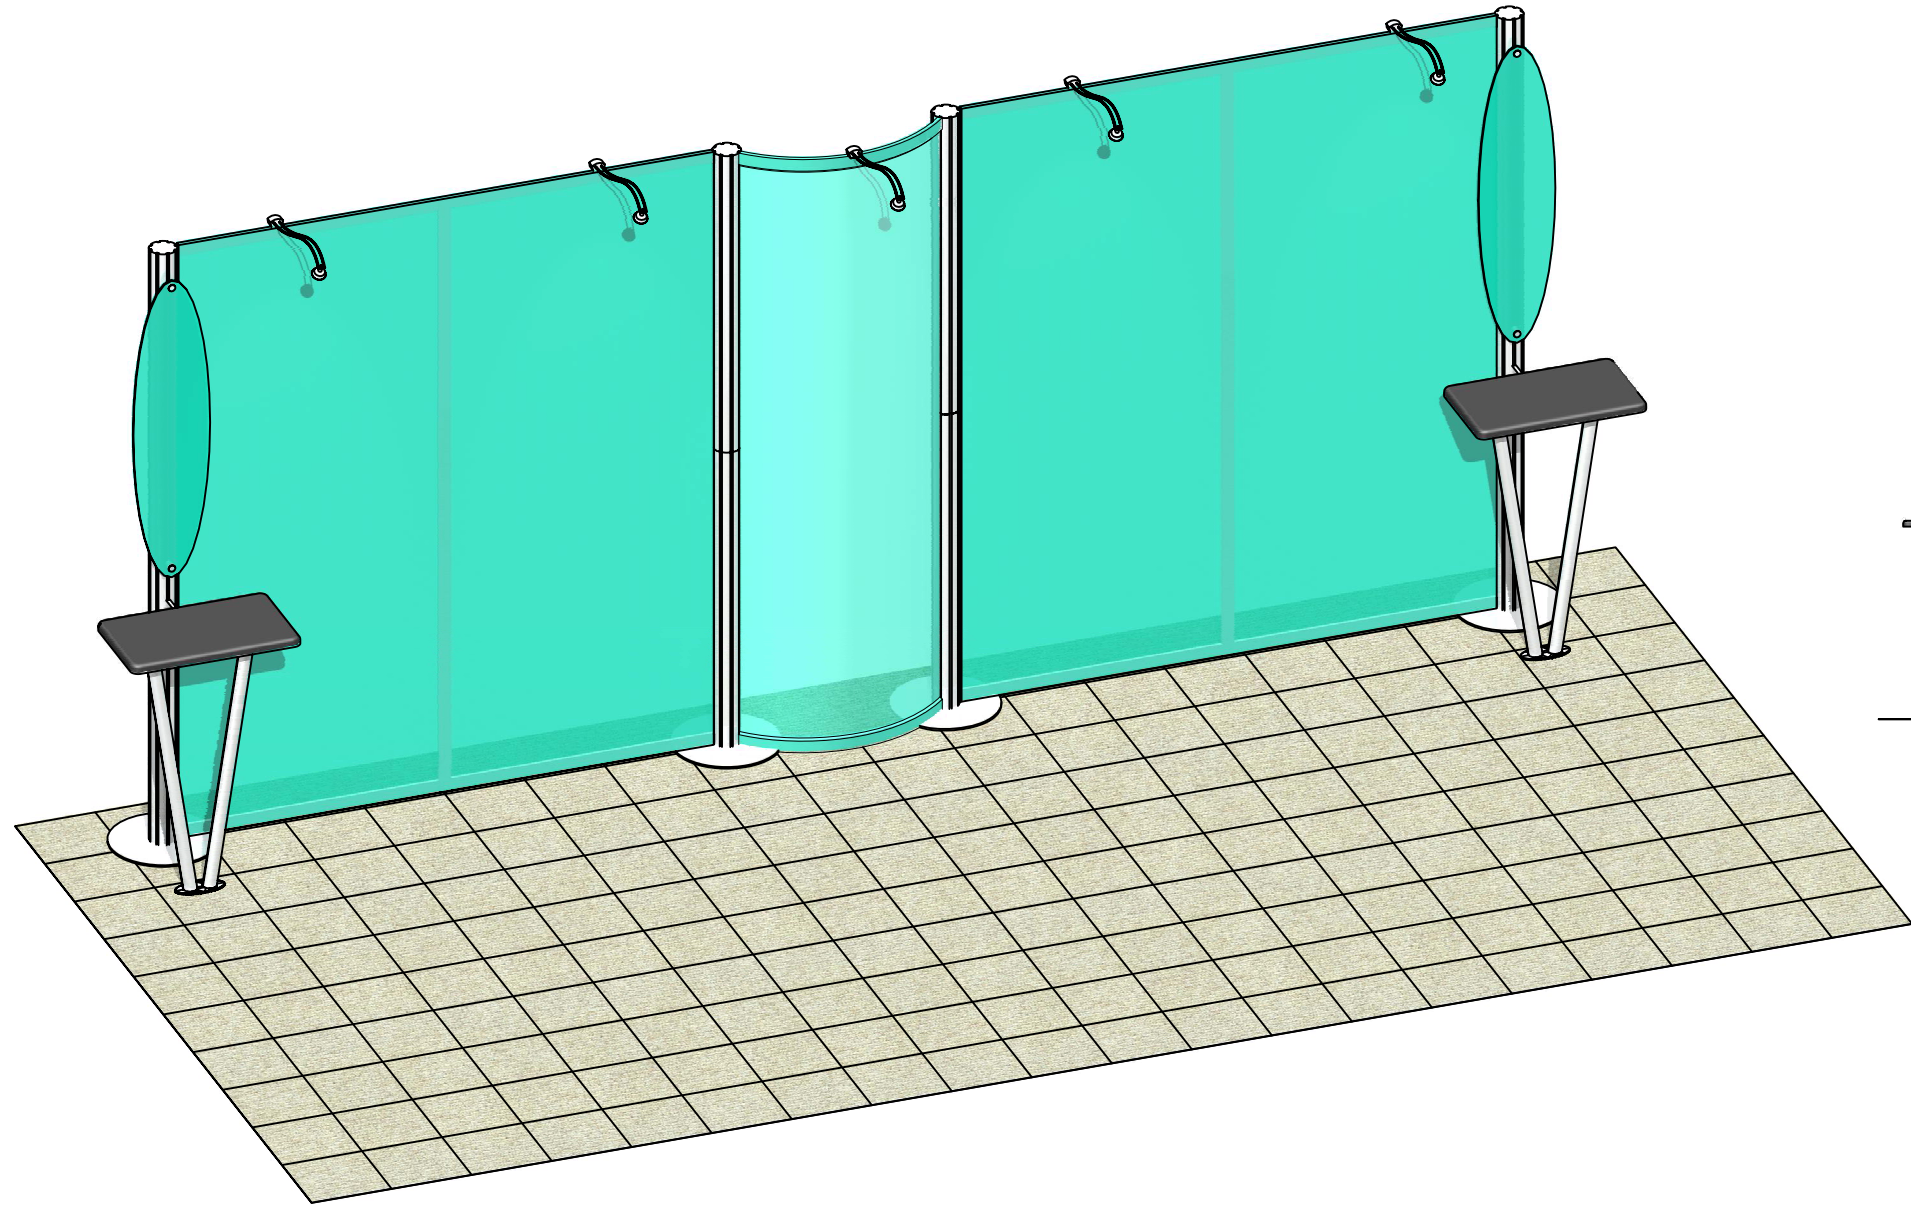

SET-UP NOTES

1. Redesign of this exhibit without approval by ORIGIN may result in dangerous and unsafe structures. ORIGIN disclaims any responsibility for redesigned exhibits it does not approve in writing.
2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

IMPERIAL TO METRIC SIZES


8' Nominal = 94 1/2" or 2400mm Actual
4' Nominal = 47 1/4" or 1200mm Actual
3' Nominal = 35 7/16" or 900mm Actual
2' Nominal = 23 5/8" or 600mm Actual
1' Nominal = 11 13/16" or 300mm Actual

1. Redesign of this exhibit without approval by manufacture may result in dangerous and unsafe structures. The manufacture disclaims any responsibility for redesigned exhibits it does not approve in writing.
 2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.


- 2400mm = (94 1/2")
- 2100mm = (82 5/8")
- 1800mm = (70 7/8")
- 1500mm = (59")
- 1200mm = (47 1/4")
- 900mm = (35 1/2")
- 600mm = (23 5/8")
- 300mm = (11 7/8")

- Phone Line / Fax
- Internet connection
- Outlet
- Main Drop (point of distrution)

--- Wire running under carpet

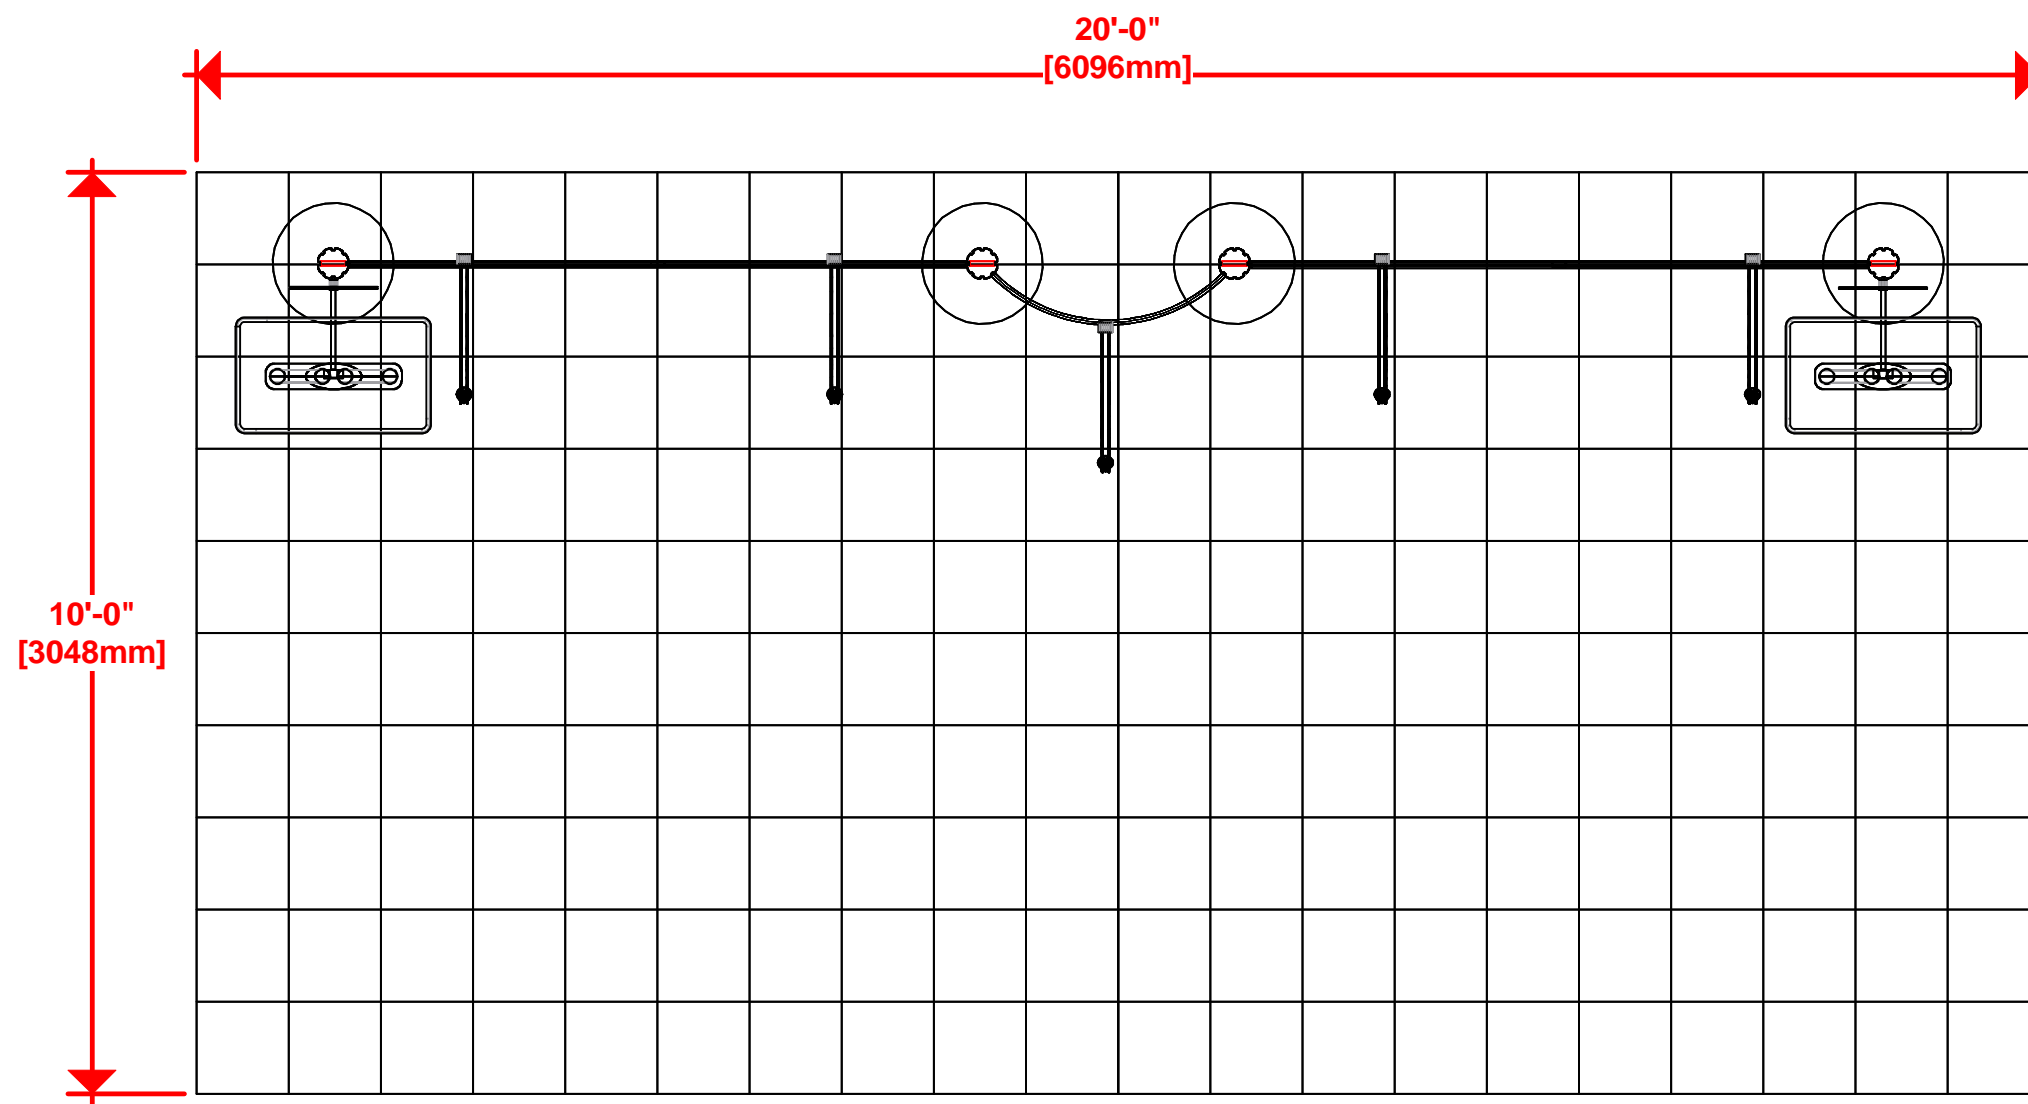

(5) LV1 LIGHTS = 50W PER STICK



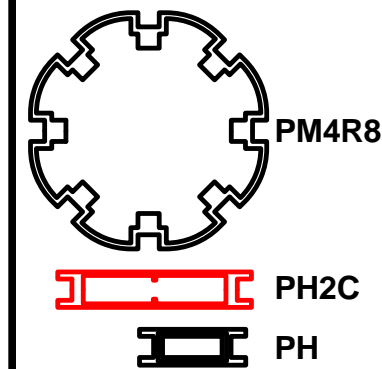


LINEAR 36

Title: SET-UP INSTRUCTIONS


EP

Code	#	Description
VE-03	4	PM4R8-1200 (47 1/4") WITH SET SCREW AT 152MM BOTH ENDS
VE-17	4	PH2C 300MM[11 3/4"] VERTICAL POST CONNECTOR WITH TENSION GLIDES
VE-04	4	PM4R8-1200 (47 1/4") WITH SET SCREW AT 152MM ONE END & LOCK ONE
VH-04	4	400MM DIAMETER FLAT PACK BASE PLATE (CIRCLE)

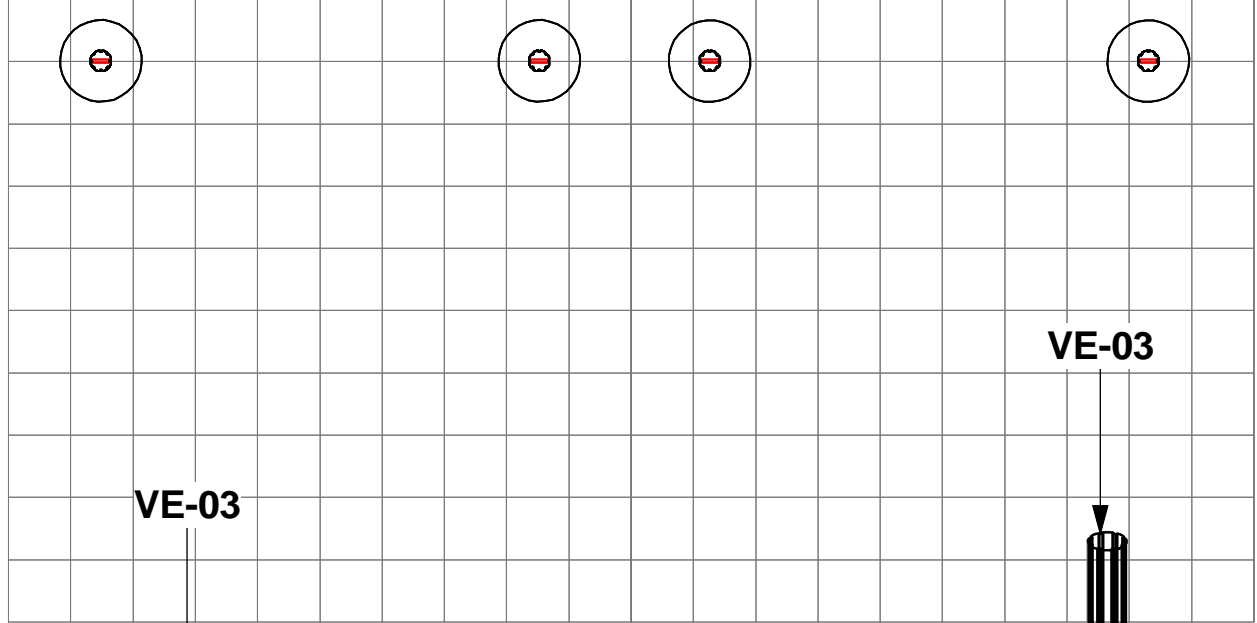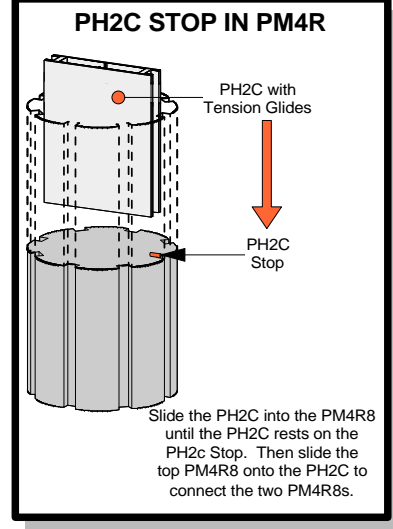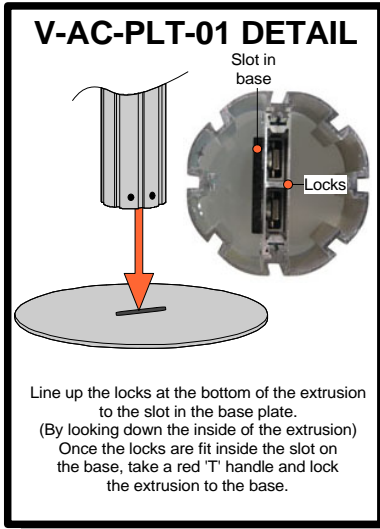


1. Redesign of this exhibit without approval by manufacture may result in dangerous and unsafe structures. The manufacture disclaims any responsibility for redesigned exhibits it does not approve in writing.
2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

- 2400mm = (94 1/2") Phone Line / Fax
 - 2100mm = (82 5/8") Internet connection
 - 1800mm = (70 7/8") Outlet
 - 1500mm = (59") Main Drop (point of distrution)
 - 1200mm = (47 1/4")
 - 900mm = (35 1/2")
 - 600mm = (23 5/8")
 - 300mm = (11 7/8")
- Wire running under carpet

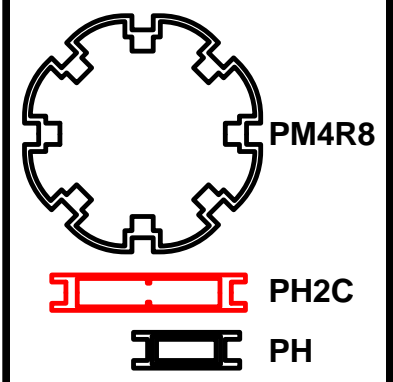


LINEAR 36

Title: SET-UP INSTRUCTIONS

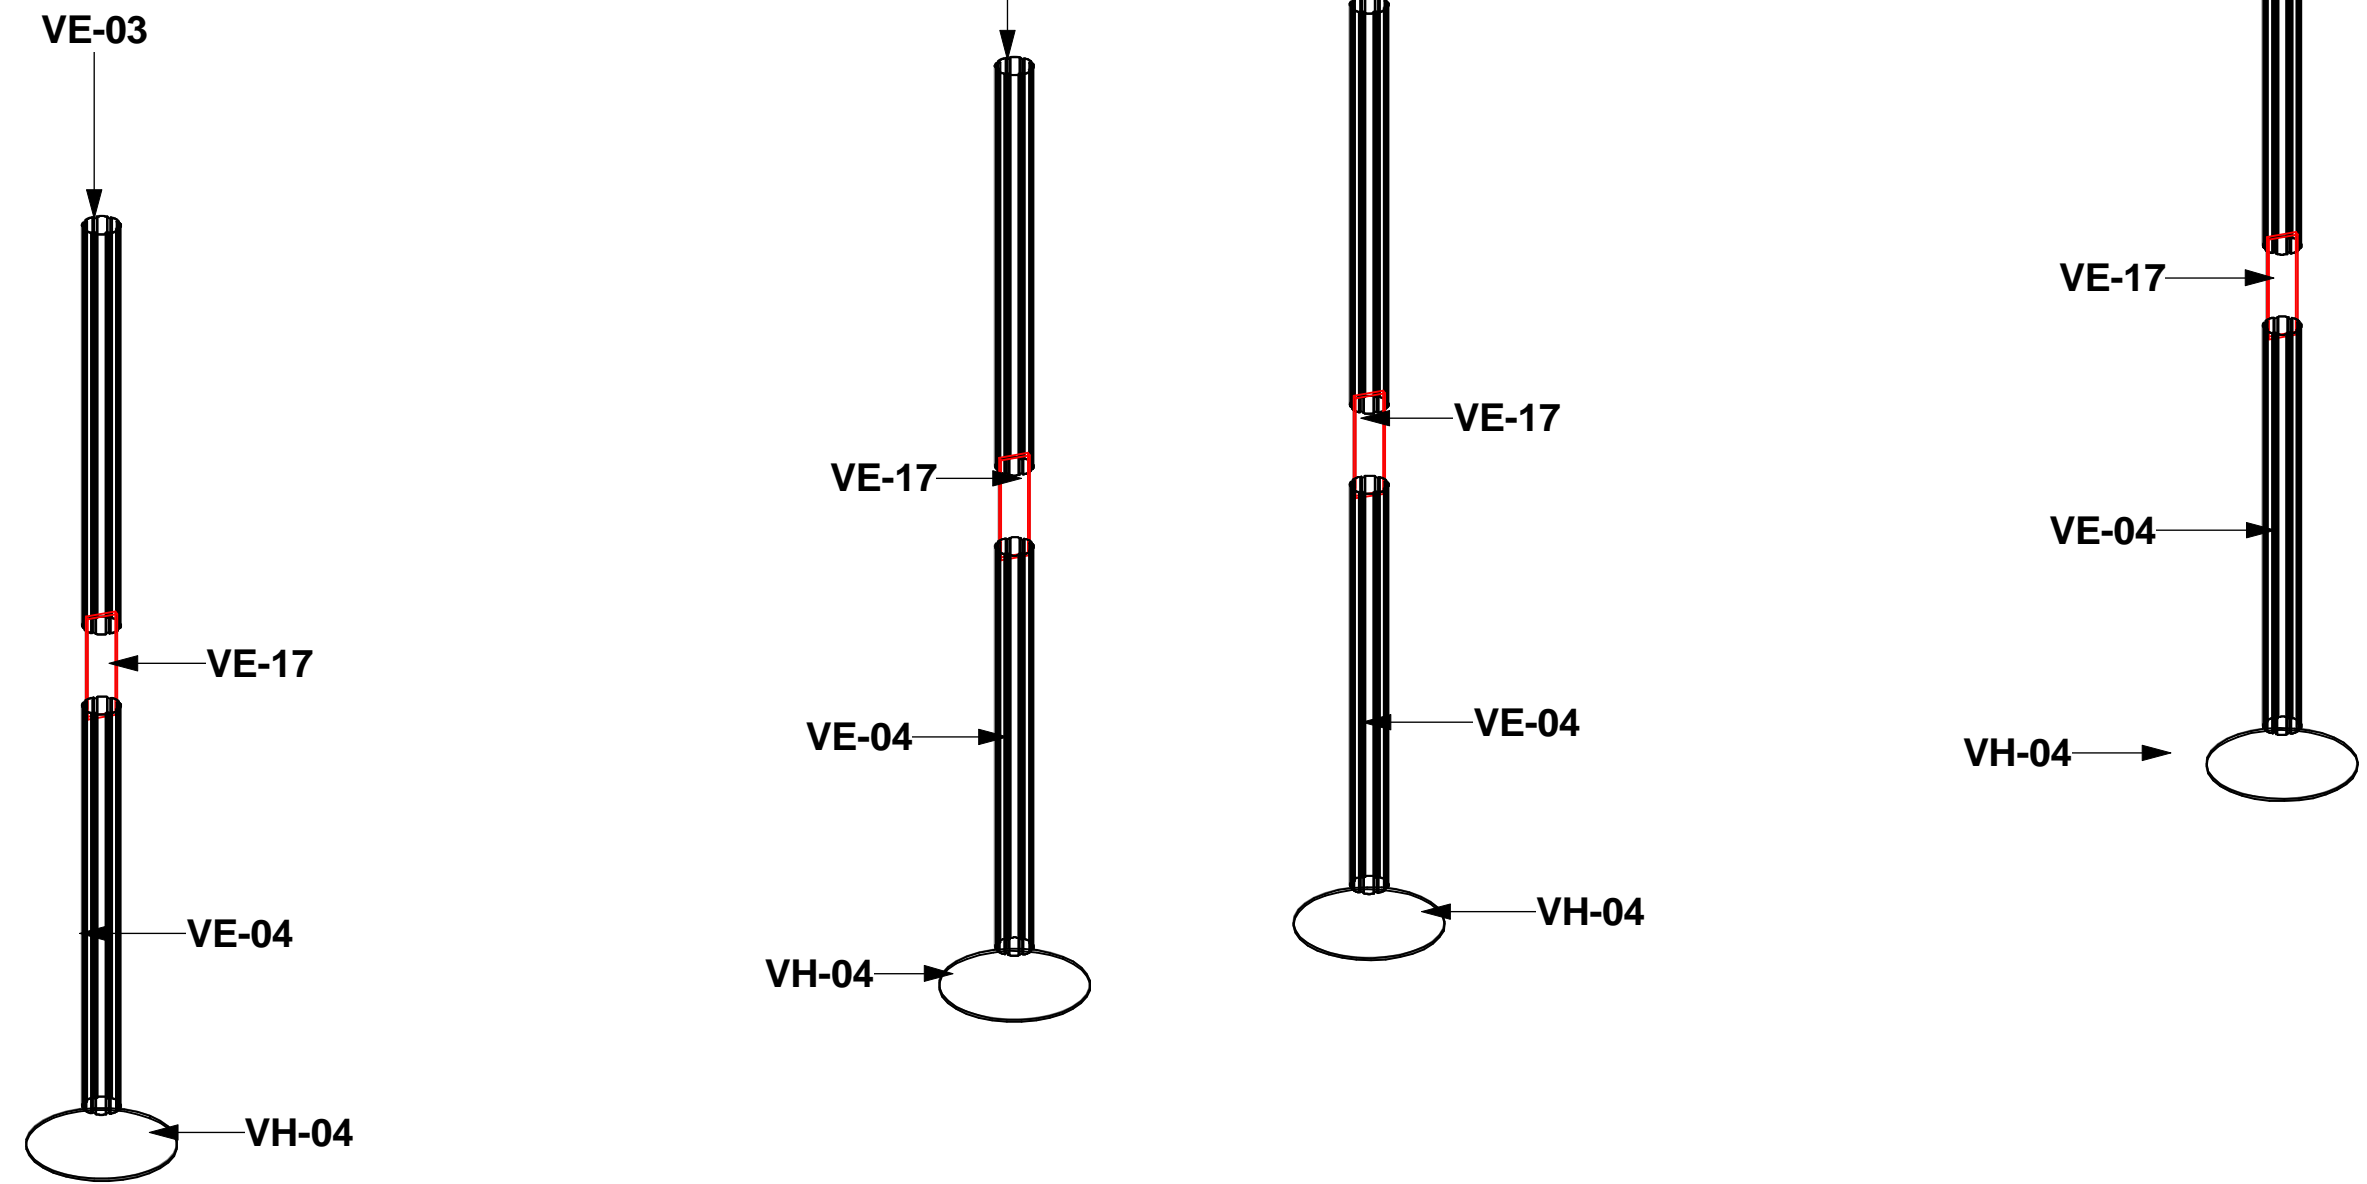


Code	#	Description
V-PH-1155-S	2	1155MM (45 1/2") PH WITH SLIDE LOCK AT ONE END
V-PH-45	2	45MM (1 3/4") PH WITH NO LOCKS
VE-22	2	1155MM (45 1/2") PH WITH 45MM (1 3/4") PH AT ONE END
VE-21	2	1200MM (47 1/4") PH WITH SLIDE LOCK AT ONE END
V-PH-1000-S-S	8	1000MM PH EXTRUSION WITH LOCKS BOTH ENDS
VE-24	8	1000MM[39 3/8"] PH EXTRUSION WITH LOCKS BOTH ENDS
VE-19	2	5

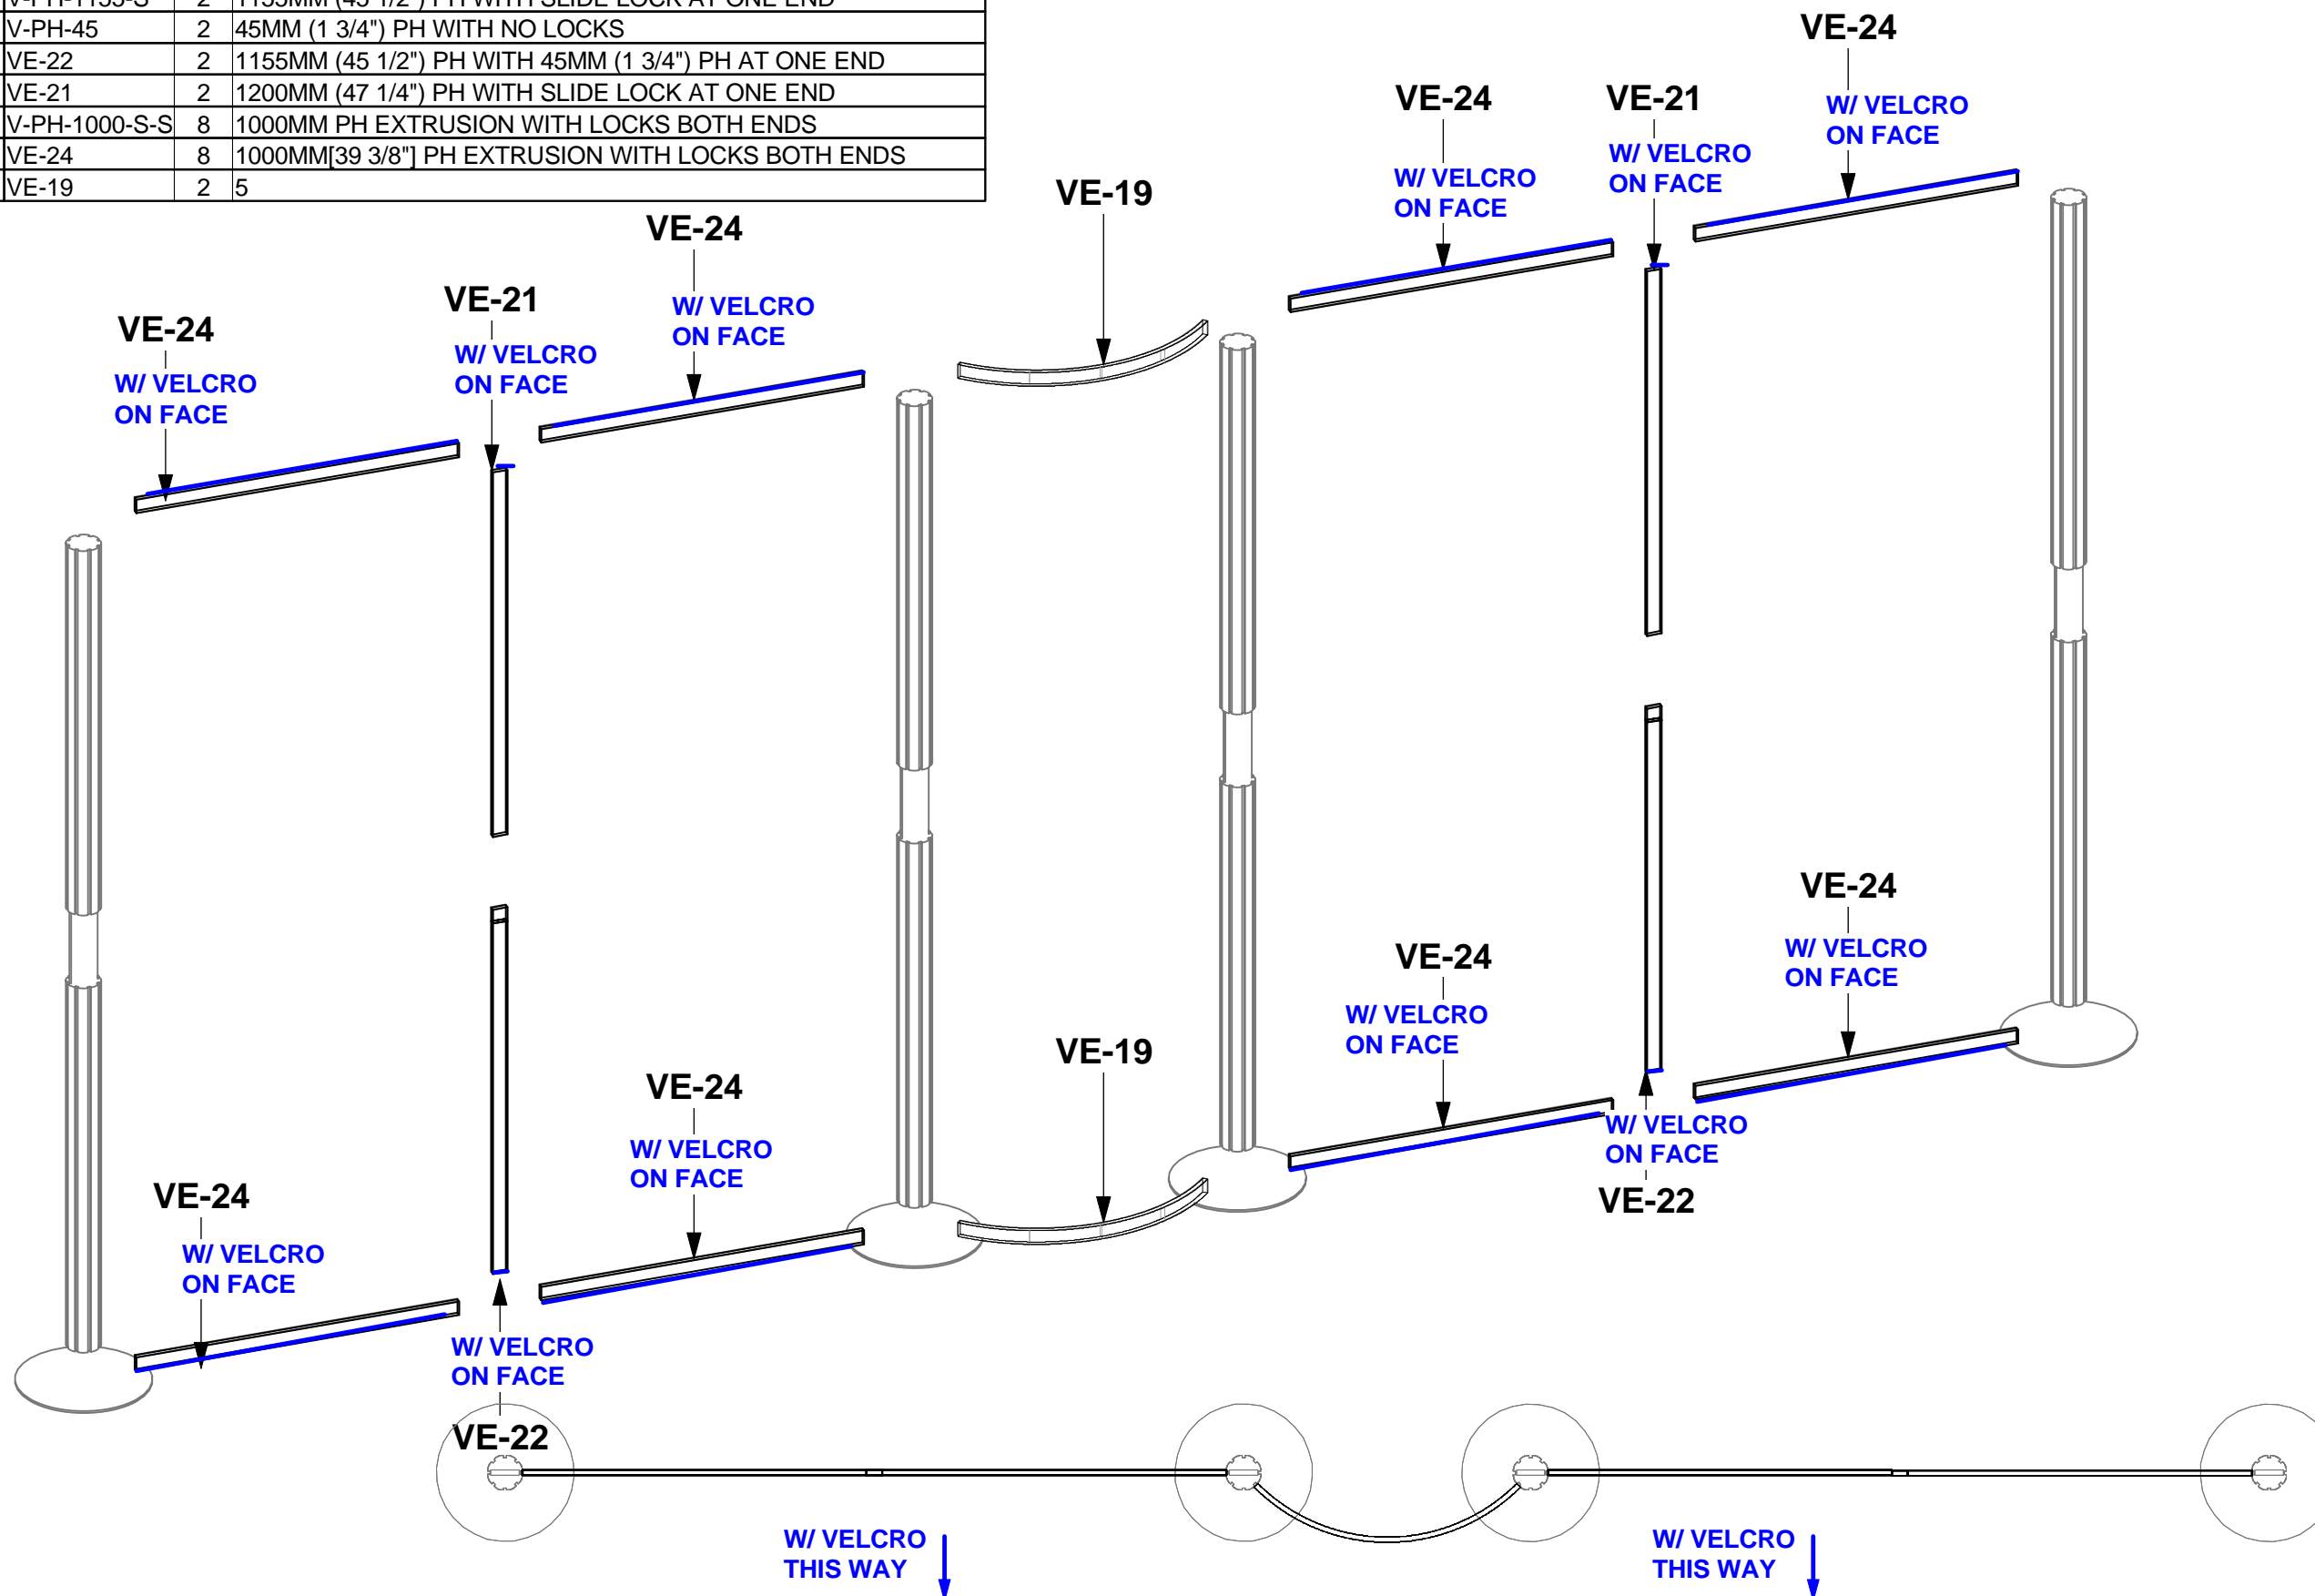

1. Redesign of this exhibit without approval by manufacture may result in dangerous and unsafe structures. The manufacture disclaims any responsibility for redesigned exhibits it does not approve in writing.
 2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	




--- Wire running under carpet

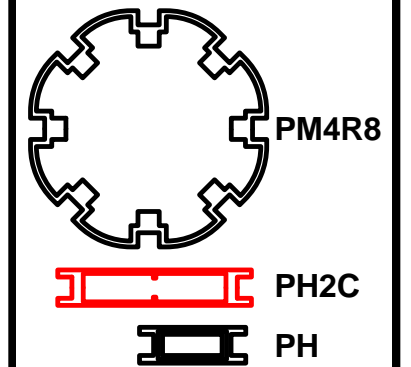

LINEAR 36

Title: SET-UP INSTRUCTIONS


Code	#	Description
GRAPHIC A	1	APPR 6'8 1/4" W X 7'10 1/2" H SINGLE SIDED DYE SUB FABRIC GRAP
GRAPHIC B	1	2400MM(V) X 844MM (94 1/2" X 33 1/4") DYE-SUB GFX W/FCE-1 T&B
GRAPHIC C	1	APPR 6'8 1/4" W X 7'10 1/2" H SINGLE SIDED DYE SUB FABRIC GRAP

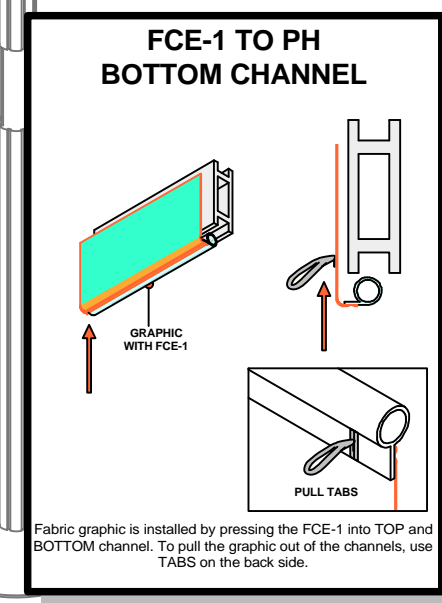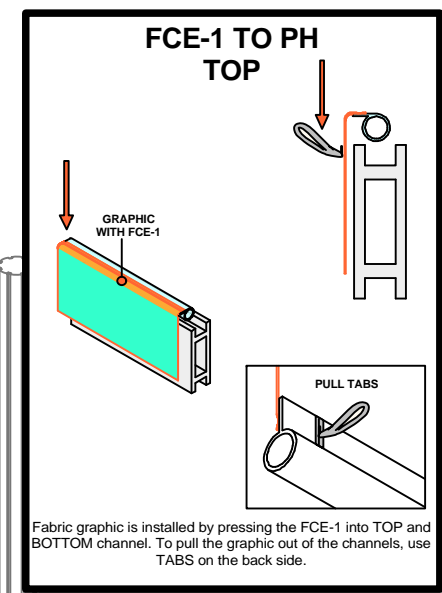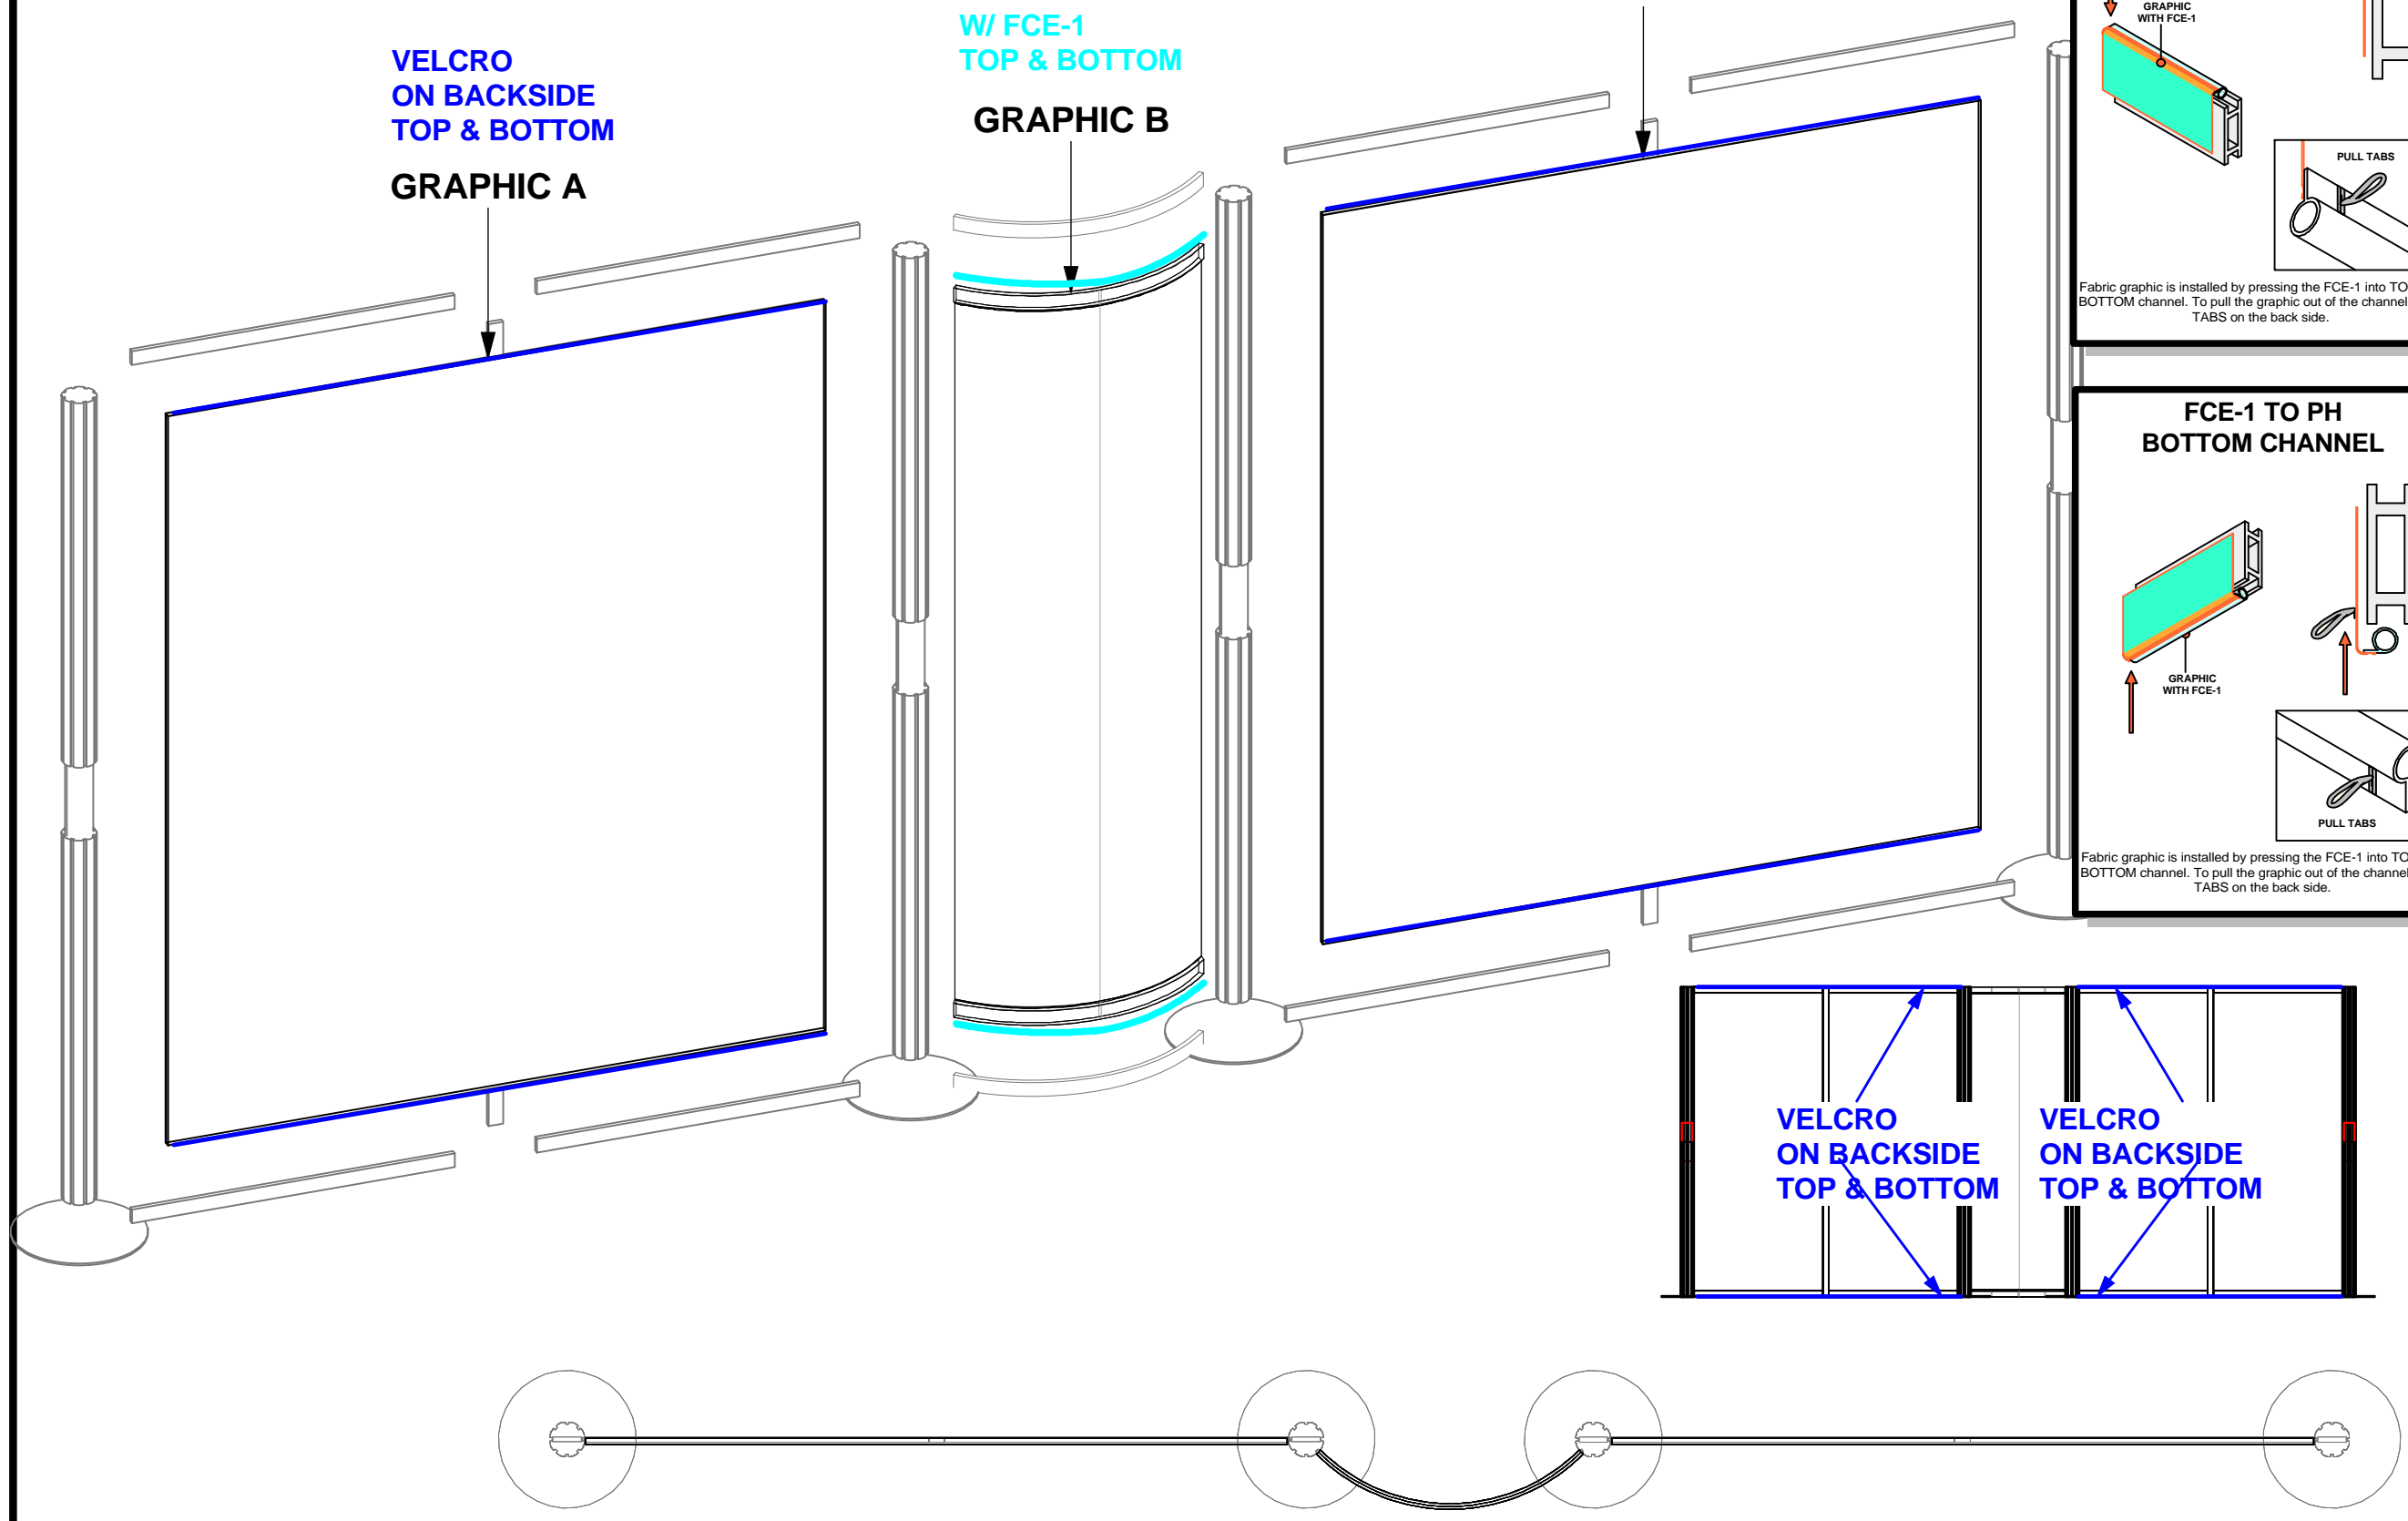

1. Redesign of this exhibit without approval by manufacture may result in dangerous and unsafe structures. The manufacture disclaims any responsibility for redesigned exhibits it does not approve in writing.
 2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	☐ Phone Line / Fax
2100mm = (82 5/8")	☐ Internet connection
1800mm = (70 7/8")	☐ Outlet
1500mm = (59")	☐ Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	



--- Wire running under carpet

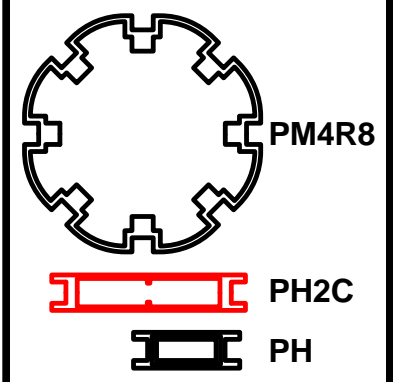


LINEAR 36

Title: SET-UP INSTRUCTIONS

Code	#	Description
VE-17	2	300MM (11 13/16") PH WITH SLIDE LOCK AT BOTH
V-CW-CT-01	2	384MM X 646MM (15 1/8" X 25 7/16") HYBRID RECT
V-MOD-LEG-2	2	
VL-02	2	1005MM X 450MM (39 9/16" X 17 23/32") V LEG 50M

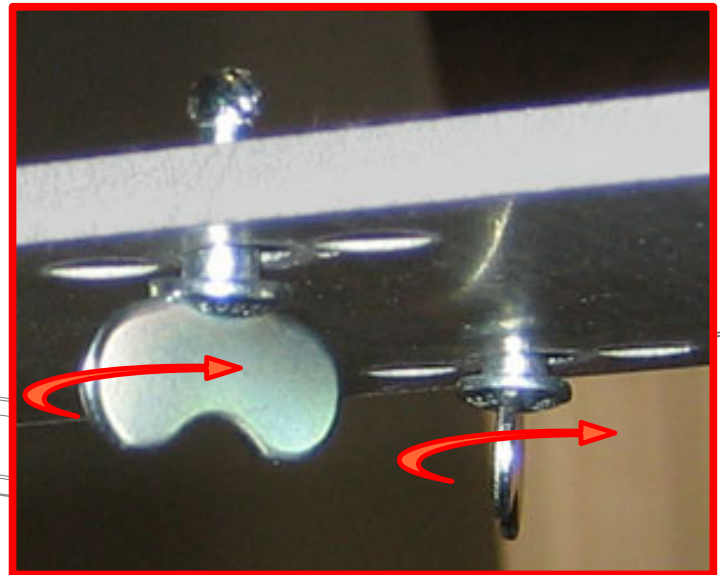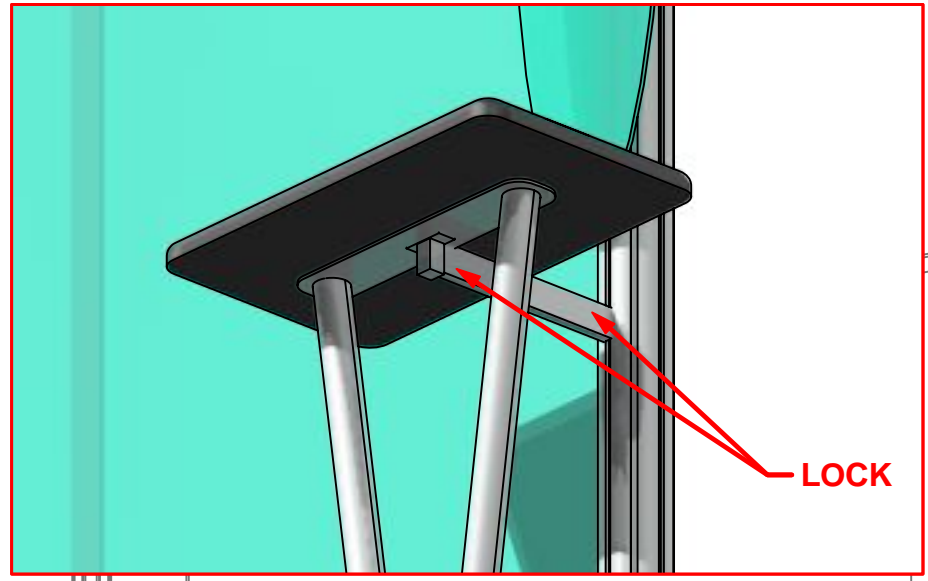


Insert the thumb connector into the bottom of the counter top and make a 1/4 turn clockwise to tighten in place.

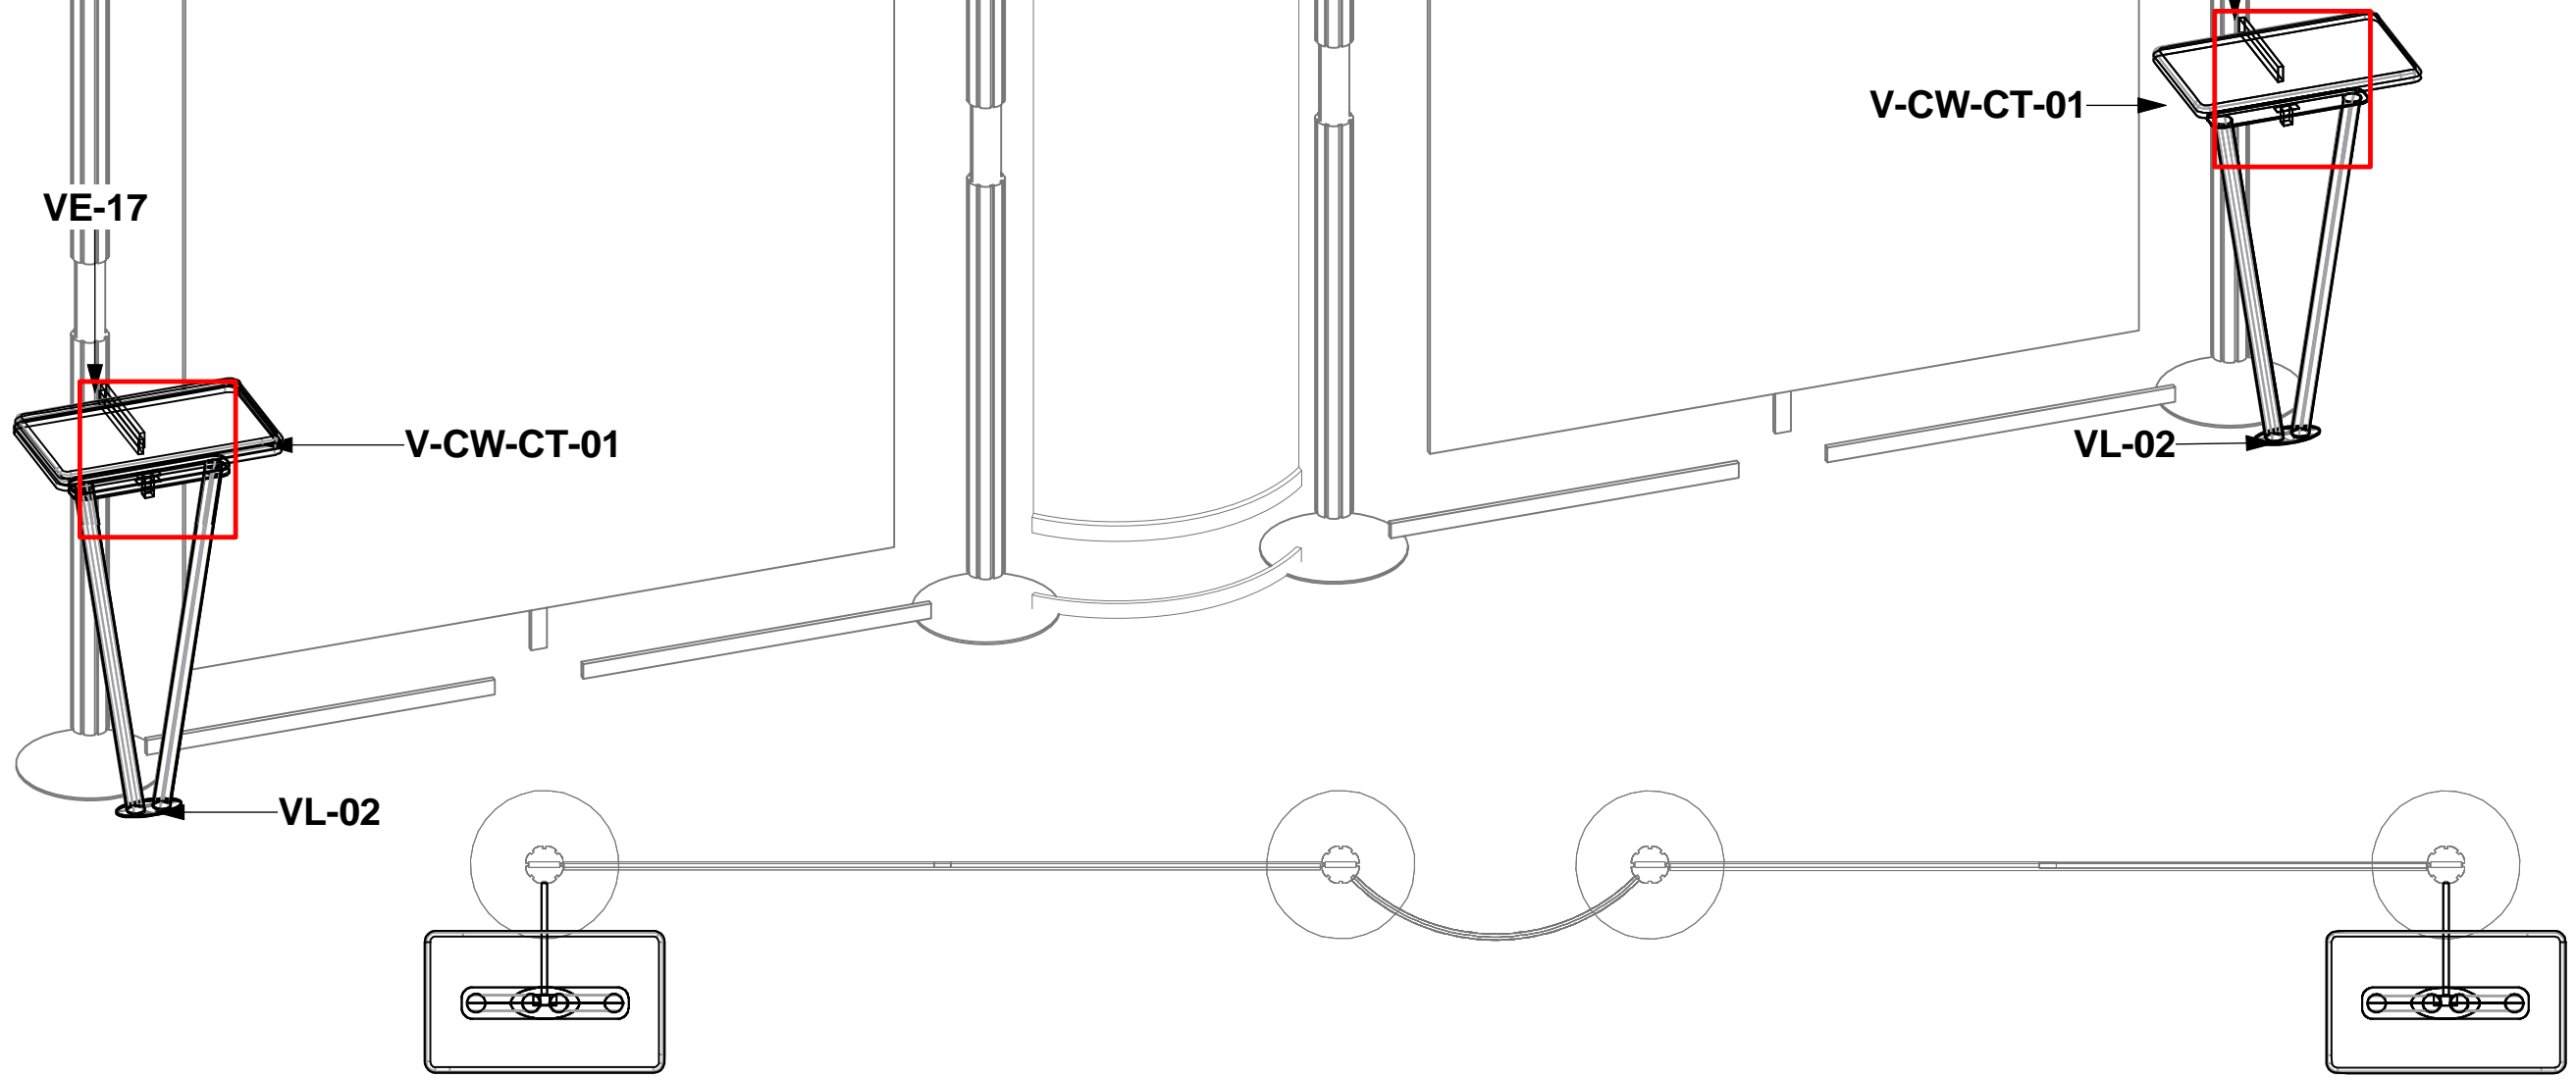

1. Redesign of this exhibit without approval by manufacture may result in dangerous and unsafe structures. The manufacture disclaims any responsibility for redesigned exhibits it does not approve in writing.
 2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	▼ Phone Line / Fax
2100mm = (82 5/8")	⚡ Internet connection
1800mm = (70 7/8")	⚡ Outlet
1500mm = (59")	⚡ Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

--- Wire running under carpet

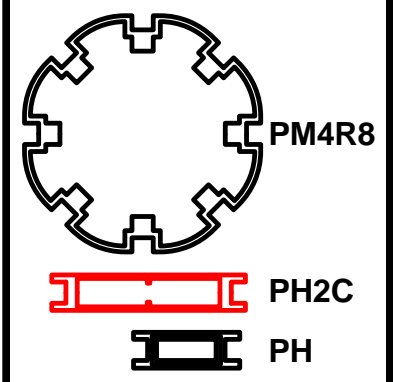

LINEAR 36

Title: SET-UP INSTRUCTIONS



Code	#	Description
V-CKSO	4	25.4MM (1") DIAMETER X 25.4MM (1") STAND OFF
V-SN-O-03	2	292MM X 1200MM (11 1/2" X 47 1/4") OVAL SHAPED SINTRA/FOAMEX
A1	2	292MM X 1200MM (11 1/2" X 47 1/4") OVAL DSG GRAPHIC & V-CKSO

1. Redesign of this exhibit without approval by manufacture may result in dangerous and unsafe structures. The manufacture disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

--- Wire running under carpet

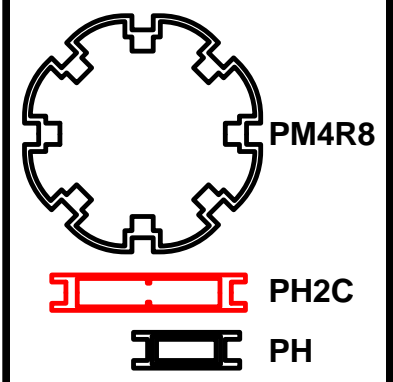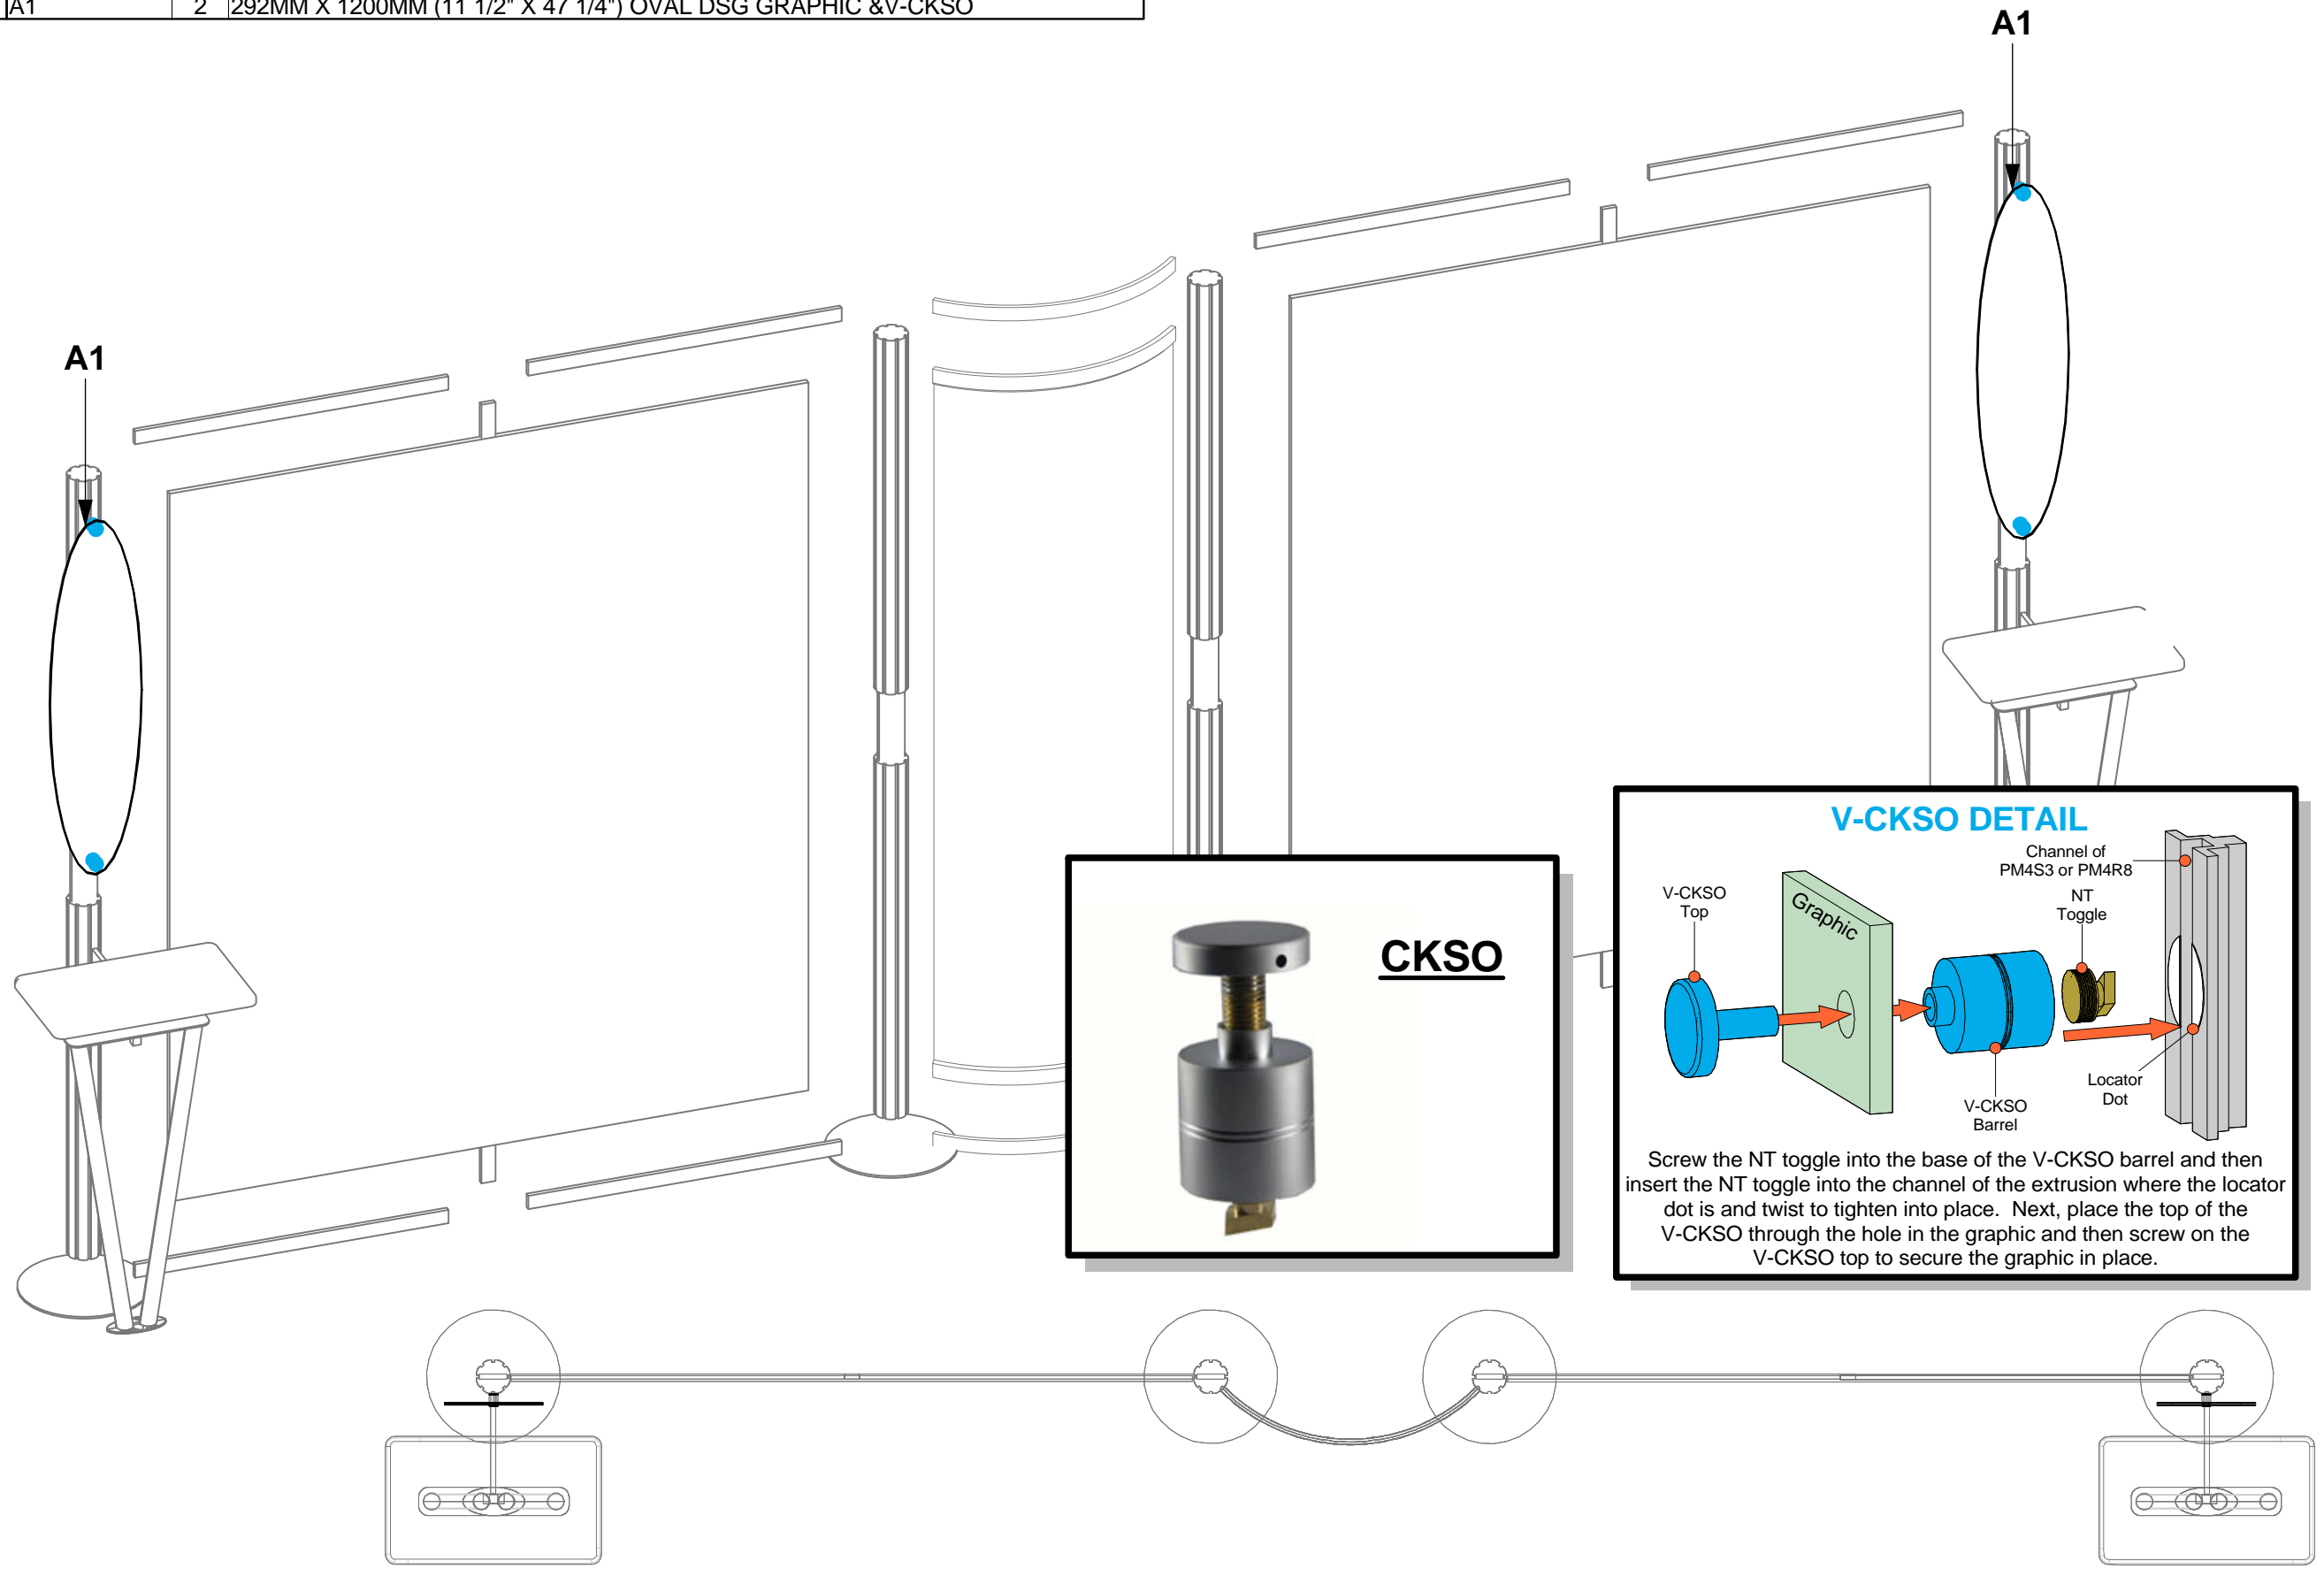

LINEAR 36



Title: SET-UP INSTRUCTIONS

Code	#	Description
V-LV1-CL	5	LV1 WITH UNIVERSAL CLIP

1. Redesign of this exhibit without approval by manufacture may result in dangerous and unsafe structures. The manufacture disclaims any responsibility for redesigned exhibits it does not approve in writing.
 2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

--- Wire running under carpet

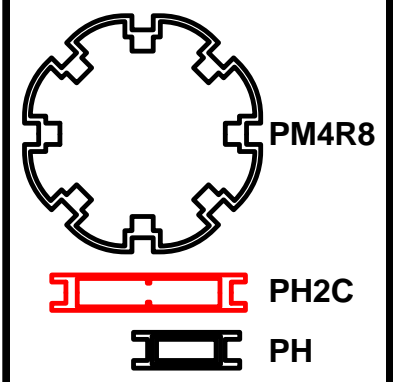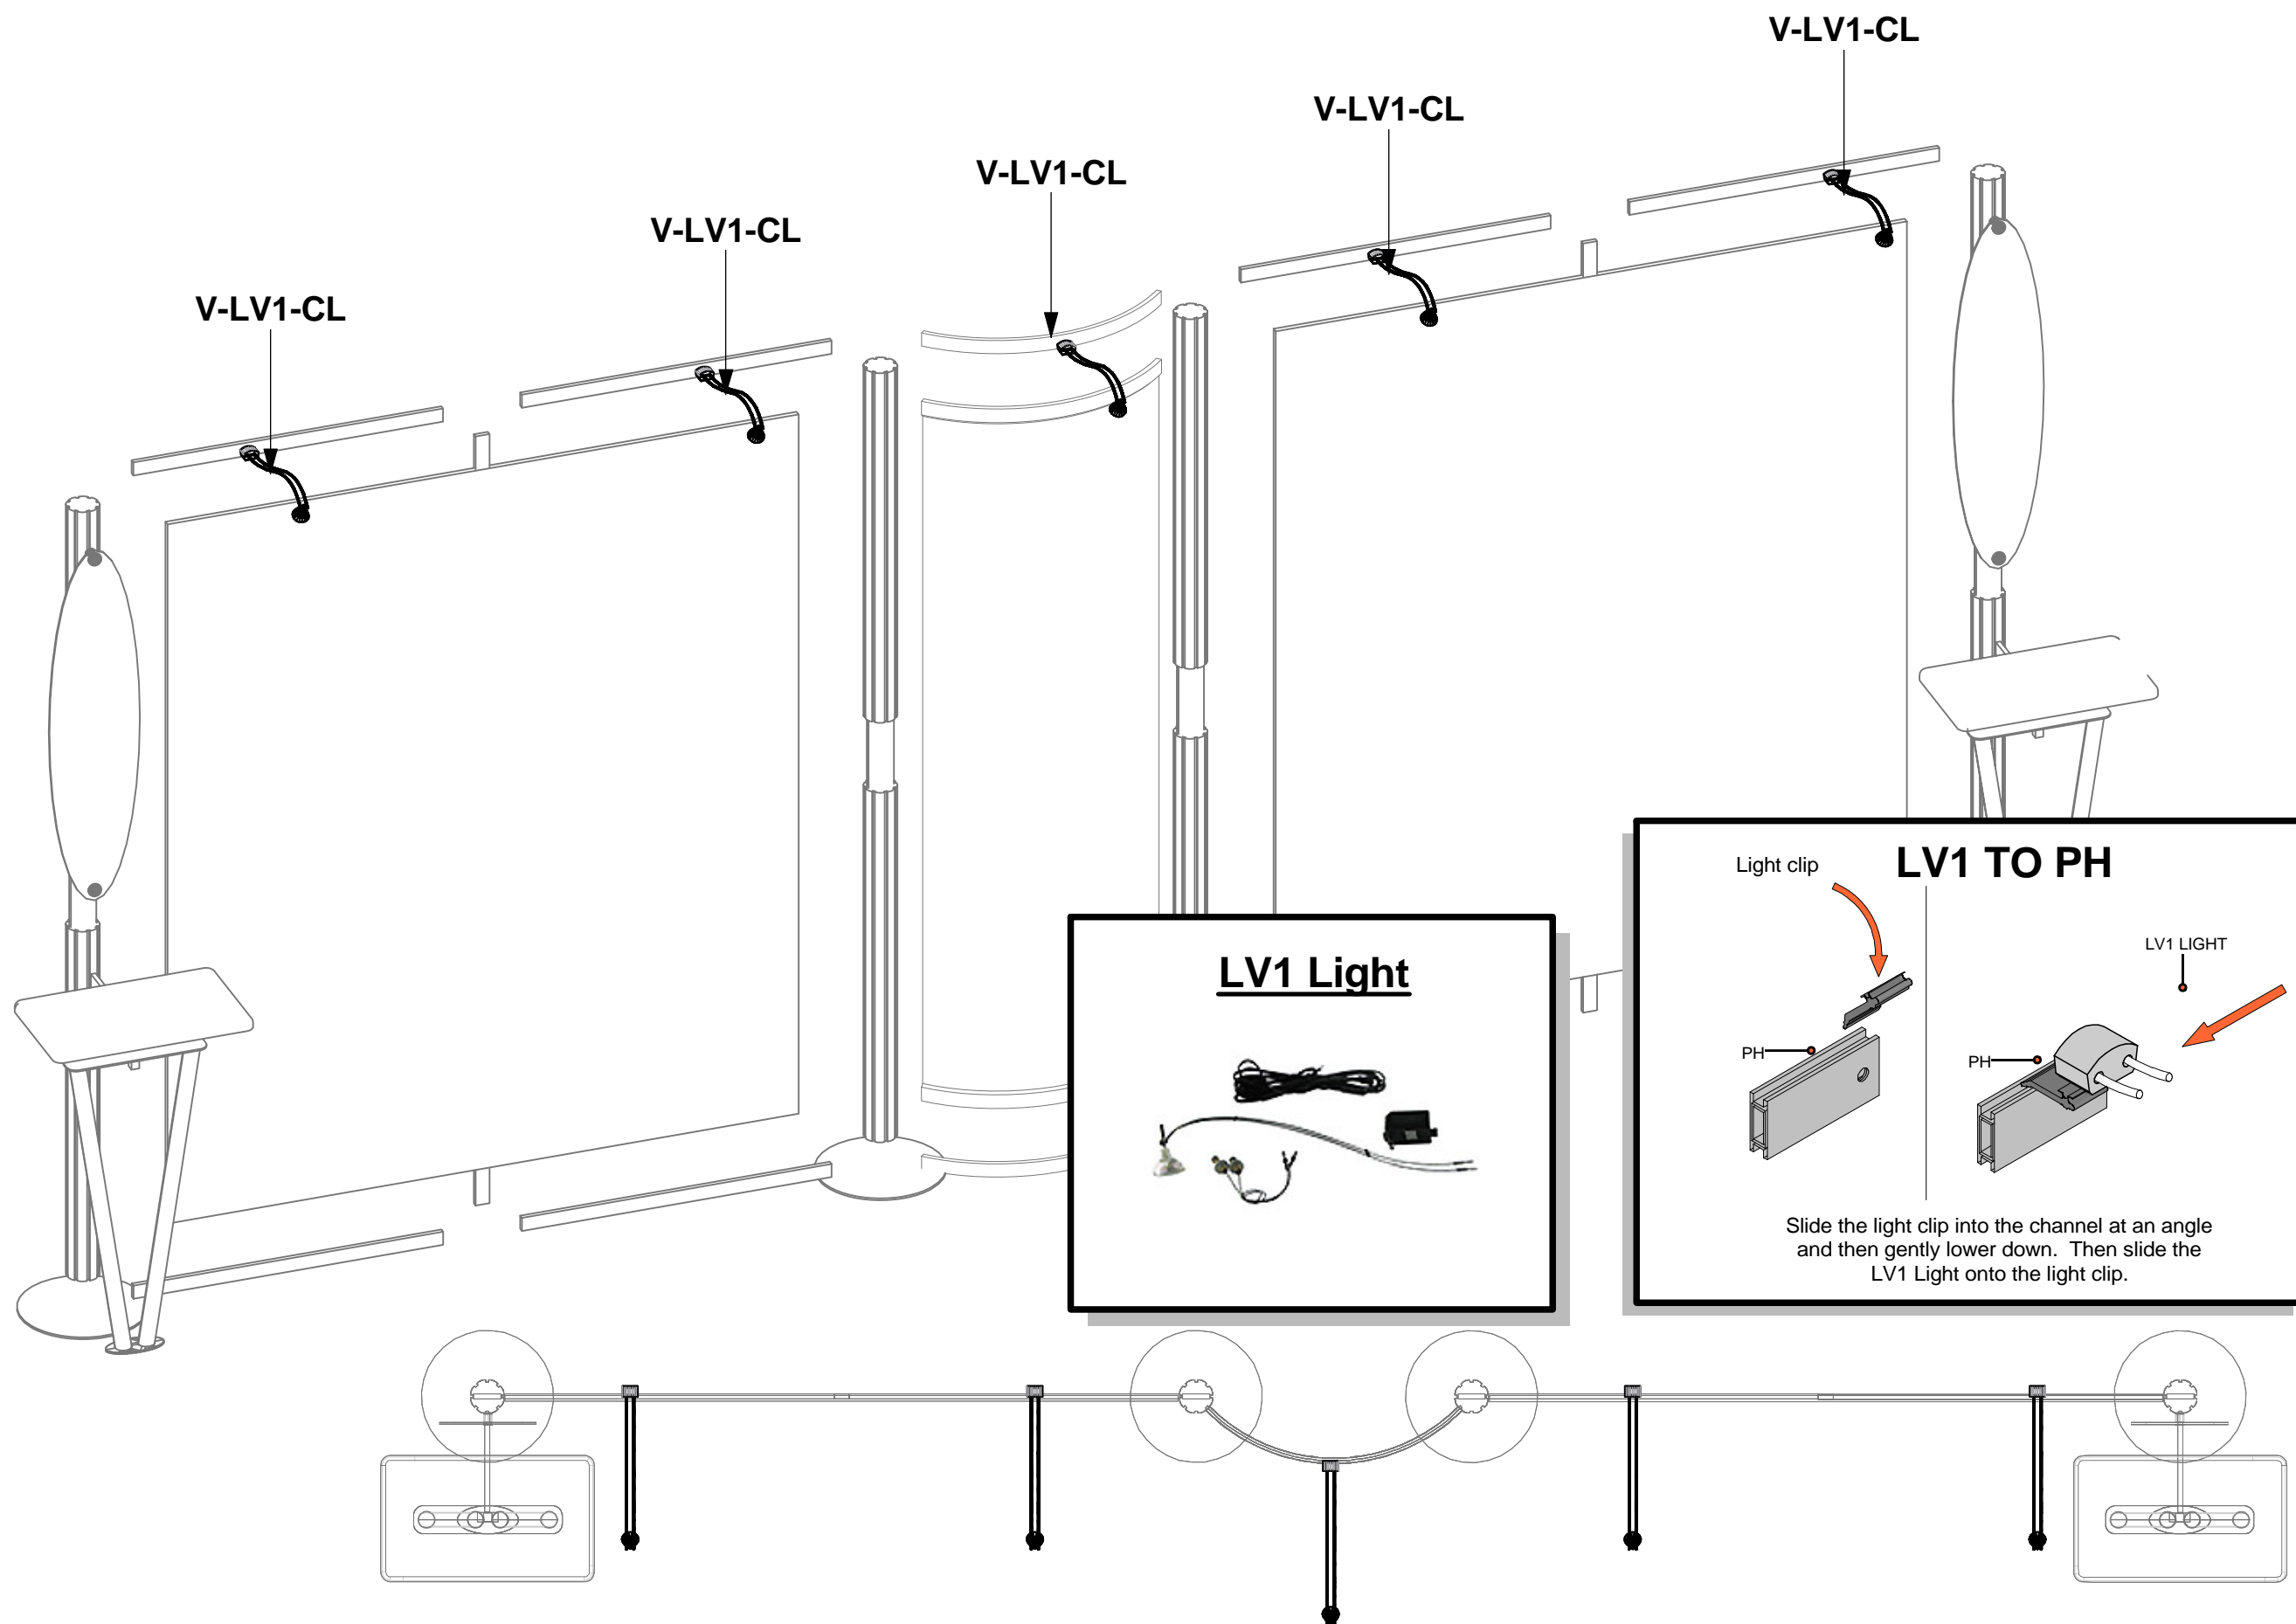

LINEAR 36
 Title: SET-UP INSTRUCTIONS