LUMIÈRE CONFIGURATION - F (NO LIGHTS)






DOUBLE

SIDED

On frame On graphic



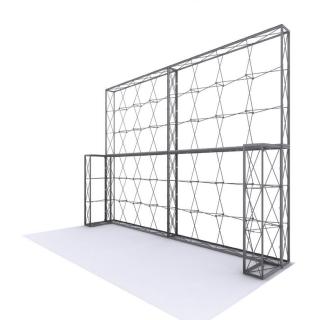



Straight Connector



L Link Connector

PRODUCT DESCRIPTION

Introducing the Lumiere Light Wall! A combination of innovative silicone-edge graphics and RPL fabric pop ups offers an easier and more cost effective SEG option. This SEG style display has the depth of the RPL so you can expose more of your message using endcap graphics. The Lumiere shrinks down in size - simply collapse the geometric frame and the SEG bungeed channel bars, and fold or roll the fabric graphics. Setup can be done by 1 person and in 5-10 minutes. SEG portability is easy and stylish.

DISPLAY DIMENSION	236.2" W x 177" H x 44.5" D					
GRAPHIC DIMENSIONS						
4X3 MAIN GRAPHICS	118.5″ W x 89″ H (8 Graphics)					
4X3 END CAP GRAPHICS	14.25″ W x 89″ H (4 Graphics)					
1X3 MAIN GRAPHICS	30.5" W x 89" H (4 Graphics)					
1X3 END CAP GRAPHICS	14.25" W x 89" H (2 Graphics)					
FRAME CONFIGURATION QUANTITY						
4X3 FRAME	4 Frames					
1X3 FRAME	2 Frames					
GRAPHIC MATERIAL						
Stretch Fabric						
GRAPHIC FINISHING						
Silicone beading is sewn around the perimeter of the fabric graphic. Silicone beading is hidden from view once installed.						
DISPLAY CONSTRUCTION						
Aluminum Frame						
SHIPPING WEIGHTS & DIMENSIONS						
4x3 Lumiere Light Wall (4 boxes total)						
Shipping Weight	35 lbs (frame only) (each box) 39 lbs (with graphics) (each box)					
Shipping Dimensions	34" L x 14" W x 9" H (each box)					
1x3 Lumiere Light Wall (2 boxes total)						
Shipping Weight	20 lbs (frame only) (each box) 24 lbs (with graphics) (each box)					
Shipping Dimensions	34" L x 14" W x 9" H (each box)					
GRAPHIC TURN AROUND TIME						
6 business days after proof approval						
AVAILABILITY CA and PA						

LUMIÈRE CONFIGURATION - F (NO LIGHTS)

PRODUCT CODE: LLW20X15FNL





Qty 4 - 4x3 Pop Up Frame



Qty 24 - 3 Section Channel Bars

PARTS LIST




Qty 2 - 1x3 Pop Up Frame



Qty 8 - 1 Section Channel Bars



Qty 16 - 4 Section Channel Bars



Qty 24 - End Cap Channel Bars



Qty 6 - Carry Bag



Qty 6 - Channel Bar Bag



Qty 6 - L Link Connector



Qty 28 - Straight Connector

PRODUCT CODE: LLW20X15FNL


SET UP INSTRUCTIONS

Set Up Pop Up Frame




a. Place frame with the adjustable feet facing down.

Insert Channel Bars




a. Expand each channel bar. Fol-


- **b.** Attach channel bars to frame.



b. Expand the frame.

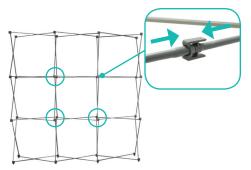

c. Close frame by pushing the outside of the frame until male and female ends connect.



c. Slide channels bars onto frame, from top to bottom, then secure onto metal peg.



d. Attach the top and bottom endcaps on each side of the frame.


Install Graphic

low bungee to connect.



a. In each corner, insert the silicone edge beading into the groove.

Optional Accessories

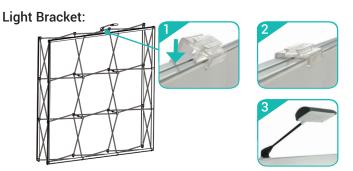


a. Snap the LED Light Bracket on top of the frame. Then slide the LED Light onto the bracket.



b. Then insert the remainder of the beading.




c. Repeat graphic installation on the end caps.

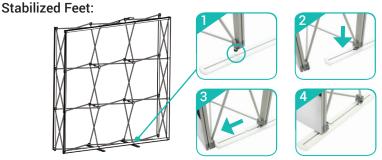

a. From the back, lift frame and insert adjustable feet onto stabilized feet. Then slide stabilized feet toward and insert onto the adjustable feet.

SET UP INSTRUCTIONS

Connecting Wall

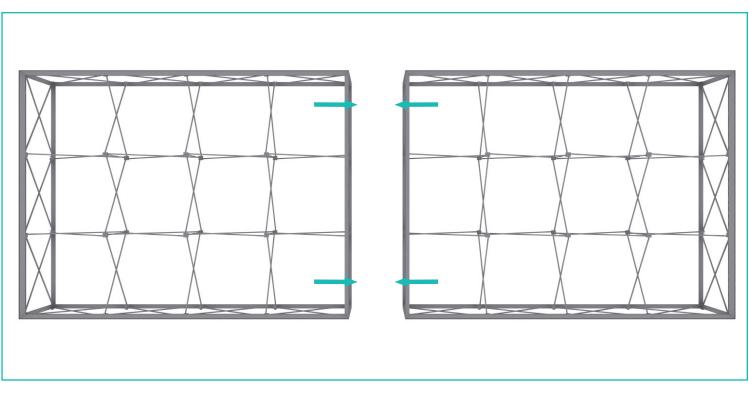

Place the (2) 4x3 frames side by side.

Note: Rendering shown without graphics for clarity.

Straight Connection



*Starting from behind, make sure the frames are flushed next to each other.





Slide Straight Connector onto the channel bars of both frames.




Turn dial to the left to lock the Straight Connector in place. Repeat for each vertical sections (6 total).


*Back side of the 4x3's shown above.

Note: Repeat process when frames are stack together (6 total).

SET UP INSTRUCTIONS

Connecting Top Walls

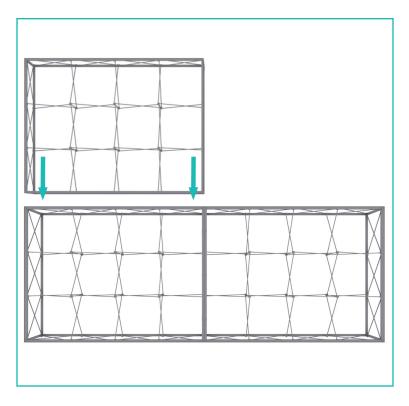

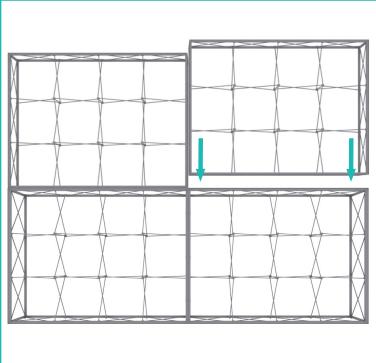

Place the 4x3 frames on top of the 4x3 frames.

Note: 2 people are required to hold each side of the top frame while the third person secrues with the Straight Connectors. Repeat process for other top frame.

Note: Rendering shown without graphics for clarity. 4x3 front side graphics must be installed first before placing the frames on top.

Straight Connection



*Starting from behind, make sure the frames are flushed next to each other.






Slide Straight Connector onto the channel bars of both frames.




Turn dial to the left to lock the Straight Connector in place. Repeat for each vertical sections (8 total).

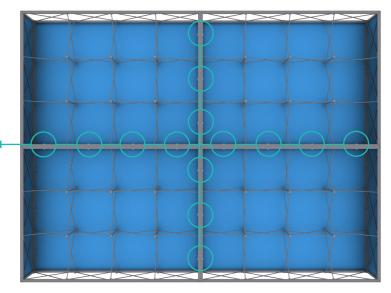

*Back side of the stacked 4x3 frames shown above.

SET UP INSTRUCTIONS

Connecting Return Walls

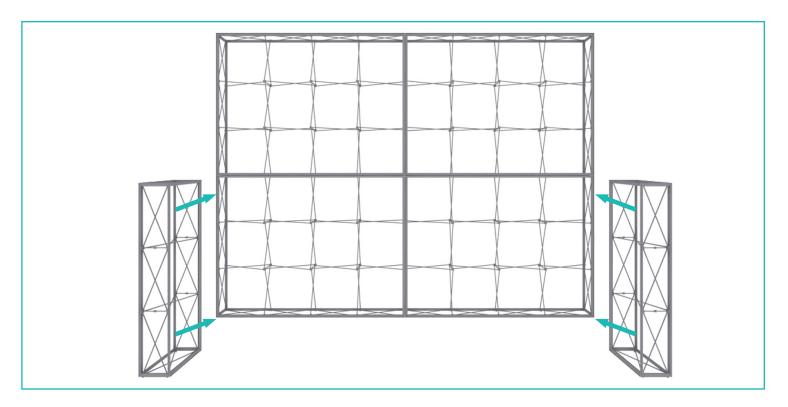

Adjoin the 1x3 frame perpendicular (90° angle) to the front side of the 4x3 frame.

Note: Rendering shown without graphics for clarity. 4x3 front side graphic must be installed before connecting frames.

L Link Connection




*Starting from behind, pull the 4x3 graphic away to make space for L Connector.






bars of both frames.

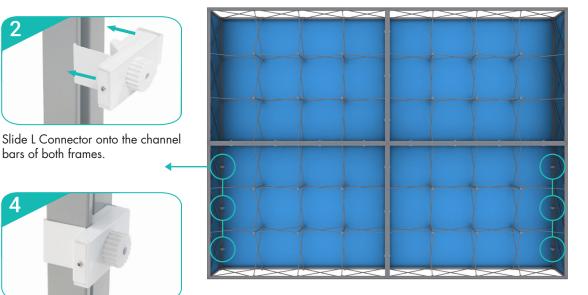

*Back side of 4x3 shown above.


TEMPLATE GUIDE

Front View

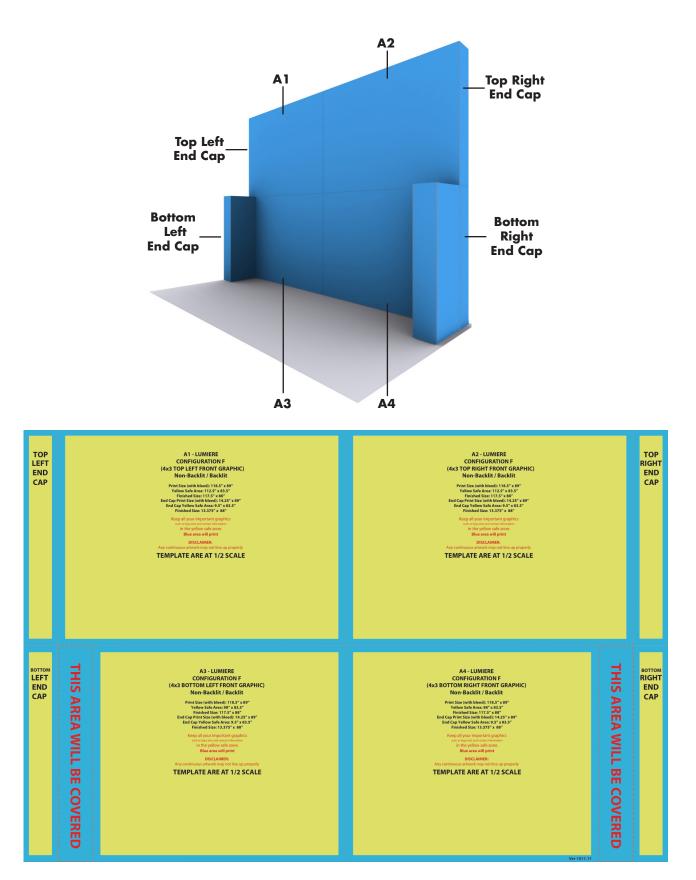

LUMIÈRE CONFIGURATION - F (NO LIGHTS)

TEMPLATE GUIDE

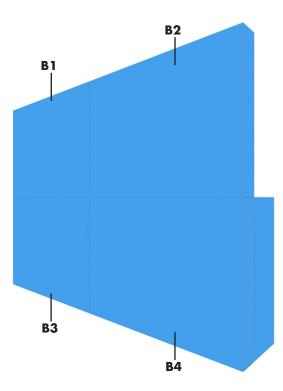




Back View

TEMPLATE GUIDE

Front View

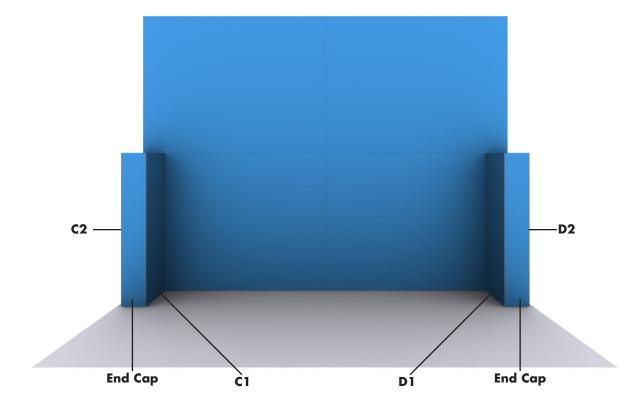

<section-header><text><text><text><text></text></text></text></text></section-header>	END	<section-header><text><text><text><text></text></text></text></text></section-header>	<section-header><text><text><text><text><text></text></text></text></text></text></section-header>	EN	<section-header><text><text><text><text><text></text></text></text></text></text></section-header>
		Ver-1011.17			Ver-1011.17