

Orbital Express™ Truss Merchandising Accessories

OR-24-MP
OR-36-MP
OR-46-MP

OR-36-SP
OR-46-SP

Orbital Express Merchandising Accessories add functionality and options to any Orbital Truss kit. Accessory options offer multiple configurations and no tools are needed for assembly. Accessories panels are an a la carte add on option for 10', 20' and island Orbital kits.



Hanging Rack



Wire Rack



Recommended hook style shown

features and benefits:

- Hook brackets sold separately
- Requires straight truss for application
- No tools needed for assembly

- Supports approximate 8 lbs max per panel
- OR-24-MP mounts to vertical truss sections on curved or straight unit
- One year hardware warranty against manufacturer defects

dimensions:

Hardware

Single Accessory Panel Dimensions:
24-MP: 6.19" w x 22.92" h x 1.37" d
157mm(w) x 582mm(h) x 35mm(d)

36-MP: 11.19" w x 37.40" h x 1.37" d
284mm(w) x 950mm(h) x 35mm(d)

46-MP: 11.19" w x 47.45" h x 1.37" d
284mm(w) x 1205mm(h) x 35mm(d)

36-SP: 11.12" w x 37.26" h x 92" d
282mm(w) x 946mm(h) x 23mm(d)

46-SP: 11.12" w x 47.25" h x 92" d
282mm(w) x 1200mm(h) x 23mm(d)

Shipping

Shipping Dimensions Slot Panel & Mesh/ Grid Panel (Includes Accessory panel and Hanging bar):

36-SP with 24-SST: 38" l x 12" h x 3" d
36-SP with 36-SST: 38" l x 12" h x 3" d
36-SP with 46-SST: 48" l x 12" h x 3" d
46-SP with 24-SST: 48" l x 12" h x 3" d
46-SP with 36-SST: 48" l x 12" h x 3" d
46-SP with 46-SST: 48" l x 12" h x 3" d

Weights:

36-SP with 24-SST: 10 lbs / 4.5 kgs
36-SP with 36-SST: 11 lbs / 5 kgs
36-SP with 46-SST: 12 lbs / 5.4 kgs
46-SP with 24-SST: 12 lbs / 5.4 kgs
46-SP with 36-SST: 13 lbs / 5.9 kgs
46-SP with 46-SST: 14 lbs / 6.4 kgs

additional information:

- Hanging bar required to hang accessory panel(s). Number of panels determined by width of backwall section
- **OR-24-SST-K:** Includes quick lock truss connectors. Holds up to 4 accessory panels – 2 on top and 2 on bottom
- **OR-36-SST-K:** Includes quick lock truss connectors. Holds up to 6 accessory panels – 3 on top and 3 on bottom
- **OR-46-SST-K:** Includes quick lock truss connectors. Holds up to 8 accessory panels – 4 on top and 4 on bottom

Shipping Dimensions (Accessory Panel Only):

OR-36-SP: 38" l x 12" h x 3" d
OR-46-SP: 48" l x 12" h x 3" d
OR-24-MP: 38" l x 12" h x 3" d
OR-36-MP: 38" l x 12" h x 3" d
OR-46-MP: 48" l x 12" h x 3" d

Weights:

OR-36-SP: 9 lbs / 4 kgs
OR-46-SP: 10 lbs / 4.5 kgs
OR-24-MP: 6 lbs / 2.7 kgs
OR-36-MP: 8 lbs / 3.6 kgs
OR-46-MP: 10 lbs / 4.5 kgs

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

Hanging Bar Attachment:



Place connectors into each end of the slim truss hanging bar. 1



Locate truss to truss junction on truss backwall and attach hanging bar on connection ring. 2

Panel Assembly: Bottom Section



Hook accessory panel on hanging bar. 1



Be sure the bottom section of the accessory panel fits over the bottom horizontal truss piece. 2

Panel Assembly: Top Section



Hook accessory panel on the bottom section of the top horizontal truss piece. 1



Be sure the bottom section of the accessory panel fits over the hanging bar. 2

Assembly Hooks



Slide top of hook bracket into accessory panel. 1



Release and let hang. 2

OR-24-MP Attachment




Slide top of hook bracket into accessory panel. 1



Release and let hang. 2



Hold accessory panel at desired height on truss vertical. 1

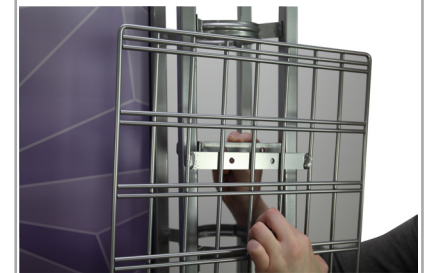


Match the bracket to the bracket plate with the truss fit between. 2



On back side of panel use provided thumb screws to connect.

3

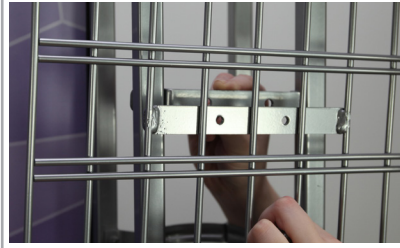

Repeat with second bracket.

4