




UV47PSDBLK
Black

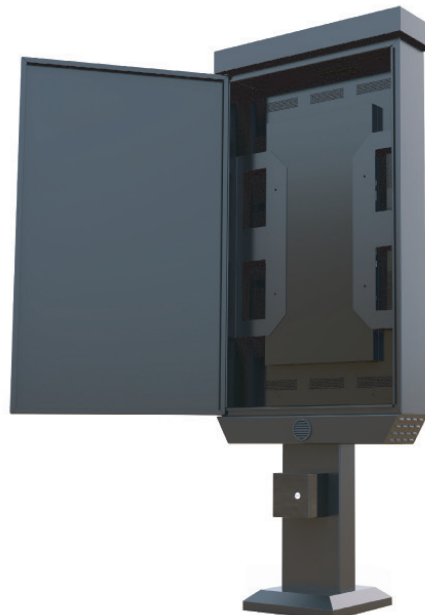

Outdoor Pedestal Kiosk

Anti-Reflective Ultra Bright Screen. Customers can be confident that in any type of weather condition, day or night content will be visible. Temperature regulated case to ensure the screen does not over heat or will not freeze. With its sleek design and color options of black, this kiosk is a standout in any location. BrightSign Built-In Media Player included.

LCD Panel Type	46.96 Inches IPS LCD
Native Resolution	1920x1080
Backlight	LED
Brightness	3000 nit
Default Color Temperature	D65 (6500K)
Contrast Ratio	1,300:1 (static), 1,000,000:1 (dyn)
Color Depth	10 bits
Response Time	12 ms (typ)
Viewing Angle	178°/178°
Light Life Time	50,000 hrs (typ)
Blackening Defect Free	Up to 230°F
Panel Surface	AG Haze 10%, 3H
Operating Temperature	-40°F - 122°F
Storage Temperature	-40°F - 140°F
Humidity	10% ~ 80% RH Non-condensing
Power Supply	Internal
Rated Voltage	100v
Power On Mode	280W (typ), 390W (maz)
Power Saving Mode	<1W
AC Out	<100W
Ports	DVI-D, RS-232, RJ-45
Certification	CE/FCC/ROHS

Accessories	Remote Control, Users Guide/Driver CD-ROM, Video Cable, Power Cable, RJ-45 Cable	
Mechanical Specs	Bezel Width	.4" / .4" / .4" / .4"
	Cabinet Color	Black
	Monitor Dimension (LxHxD, w/o stand)	42.09x24.13x3.54"
	Monitor Weight	70.55 lbs/79.37 lbs
	VESA Mounting (dimension)	15.75x15.75"
User Interface	Language	English
	Daisy Chain	DVI, RS-232
	Proof of Image Retention	Yes
	Dimming Control (DCR)	Yes
	Built-In Video Wall Support	Up to 15x15
	ID Setting for Daisy Chain	Yes
	On/Off Scheduling	Yes
	Ambient Light Sensor	Yes
	Total Turn-On Time	Yes
	Internal Temperature Sensor	Yes
	Network Control	RS-232, RJ45
OSD Menu Rotation	Yes	
Kiosk Dimensions	Height	72"
	Width Top	29.5"
	Depth	9.375"
	Base	15.125" x 15.125"