


Base-X Banner Display

Product Parts

- 1 - Banner*
- 2 - Graphic Rails (x4)
- 3 - Foot Base
- 4 - Bracket (x2)
- 5 - Post Connectors (x2)
- 6 - Center Post
- 7 - Top Post
- 8 - Bottom Post
- 9 - Gasket**
- 10 - Screw Twist Knob
- 11 - Case

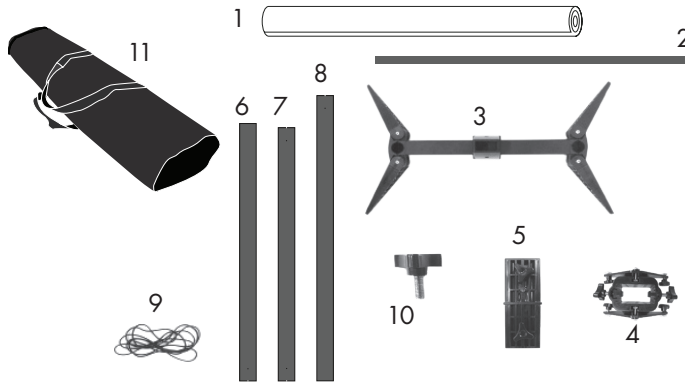


*Depends on Single or Double Banner Ordered.
**Comes attached to Banner if ordered as kit.

Display Set-Up


Step 1

Start on flat surface and spread out all four feet of the Foot Base (3) and insert Bottom Post (8) with hole closest to end into center opening. Tighten the Screw Twist Knob (10).




Step 2

Slide one Bracket (4) over Bottom Post (8) with flat side facing down. Position near bottom.




Step 3

Remove thumb screws and slide Post Connector (5) into top of Bottom Post (8) with inset nuts facing away from hole. Slide Center Post (6) over the Post Connector (5). Reinsert thumb screws into holes and tighten.



Step 4


Slide one Bracket (4) onto Top Post (7) from the bottom with flat side facing up. Position near top.



Display Set-Up Continued...


Step 5

Remove end caps from each Graphic Rail (2). Locate the square screws from Bracket (4) and the groove on back of Graphic Rail (2). Loosen thumb screws if needed and align the groove and nut and slide onto Bracket (4) centering red arrows to thumb screws. Retighten thumb screws.

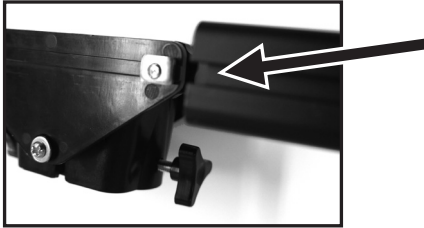

Step 6

Slide gasketed end of Banner (1) into slot on edge of both upper and lower Graphic Rails (2). Slide the Banner across the Graphic Rail (2) at top and then across bottom. Once Banner (1) is centered move the Brackets (4) in opposite directions until desired tension is achieved. Finally tighten thumb screws on Brackets (4) to hold Banner (1) in place. Add end caps back onto Graphic Rails (2).

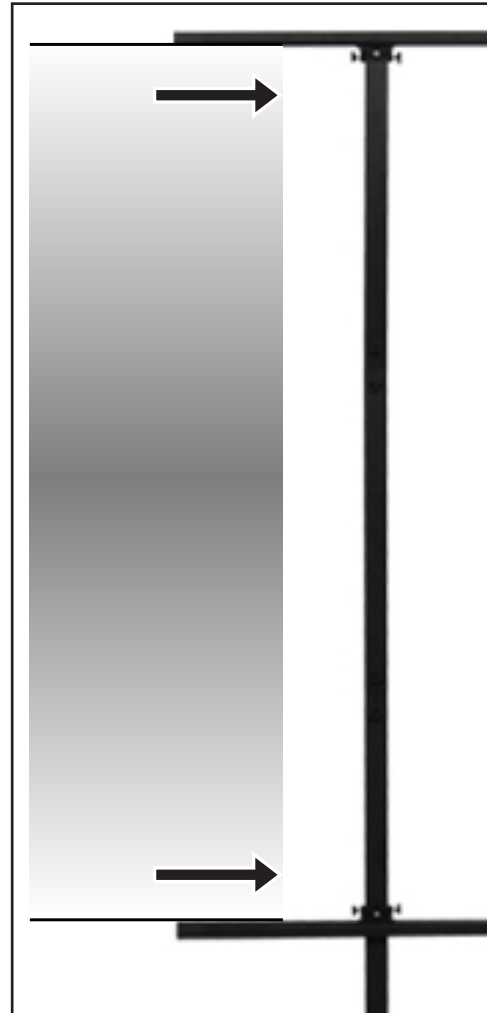

Storage and Care

Place all product parts into carry cases and store in a cool dry location. To clean, wipe with damp cloth.