


Base-X Sign

Product Parts

- 1 - Graphic*
- 2 - Foot Base
- 3 - Bracket with Rail (x2)
- 4 - Post Connector
- 5 - Top Post
- 6 - Bottom Post
- 7 - Hex Wrench
- 8 - Case

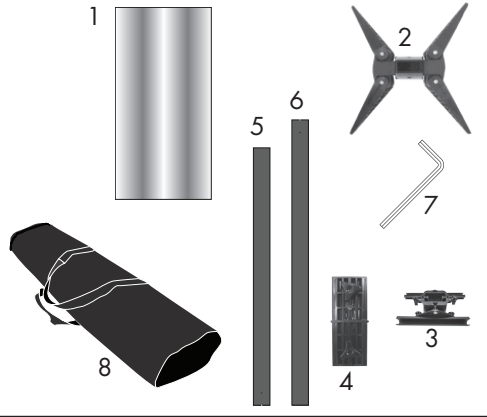


*Depends on Single or Double Graphic Ordered.

Display Set-Up


Step 1

Start on flat surface and spread out all four feet of the Foot Base (2) and insert Bottom Post (6) with hole at top into center opening. Tighten knob on Foot Base (2).




Step 2

Slide one Bracket with Rail (3) over Bottom Post (6) with channels facing up. Do not tighten thumb screws on Bracket until final step.

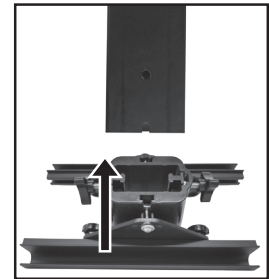

Step 3

Slide remaining Bracket with Rail (3) onto Top Post (5) from the bottom with channels facing down. Position near top. Do not tighten thumb screws on Bracket until final step.

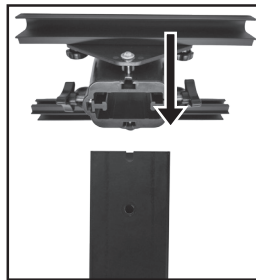


Step 5

Place Graphic (1) between the two Brackets with Rail (3) and push towards each other until desired pressure is achieved to hold in place. Finally tighten thumb screws on each Bracket with Rail (3).

Step 4

Remove thumb screws from Post Connector (4) and place into top of Bottom Post (6) with inset nuts facing away from hole. Place Top Post (5) over the Post Connector (4). Reinsert thumb screws into holes and tighten.



Storage and Care

Place all product parts into carry cases and store in a cool dry location. To clean, wipe with damp cloth.