

SOLO Standard

Description


The SOLO Standard is the basic building block of the SOLO SYSTEM. Assembled in less than one minute. Available in two heights:

- SOLO Standard 36", 26 lbs.
- SOLO Standard 100 39", 29 lbs.

Parts and Features

SOLO Standard 100 (33" x 17 1/2" x 39")

Tensaflex (A)	(59" x 38" x 1/2")
Top (C)	(33" x 17 1/2" x 1")
Base (B)	(31 1/2" x 15 1/2" x 1")
Shelves (D & E)	(29 1/2" x 12" x 1/2")

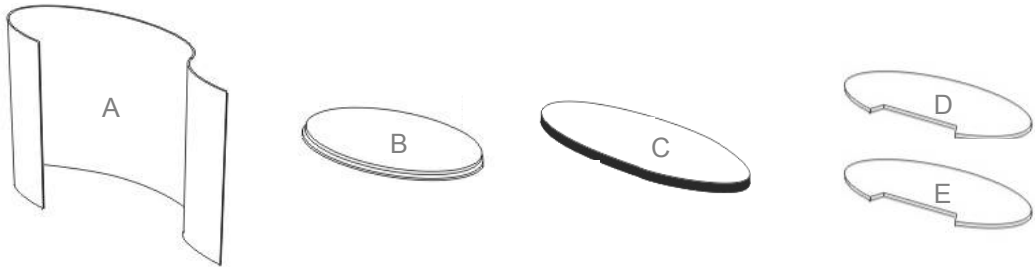

Accessories

- Posts: Two black iron poles, 57" high, 3.7 lbs, broken in three parts each. The SOLO Top has two holes on each side, 26" apart, with plastic jackets. Header to be attached to poles with velcro: Suggested dimensions 10" x 33 1/2", round corners. Curvo Post available.
- Umbrella: Various colors available. Logos can be printed in two colors. Includes one black iron pole, 57" high, 4.4 lbs.
- Graphics: To be provided by distributor. Recommended dimensions: 27 1/2" X , 29 1/2" .
- Door: Laminated locking doors. Dimensions: 13 1/2" X 1/2" x 38" , 5 lbs

Packing


- Shipped in a corrugated box. Dimensions: 39" x 24" x 6". Weight packed: 34 lbs
- Optional carry-bags available, packs one SOLO Standard per bag (Item # 85100).
- Molded shipping cases available. Packs two SOLO per 42" x 30" x 8" case. Call to verify references & dimensions.

SOLO Standard

Instructions

Step 1


Situate the base (B) at the desired location, stretch out the Tensaflex (A) and place it according to the guiding dots. Verify proper vertical direction.

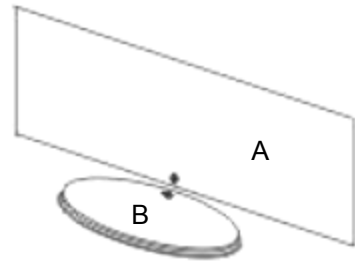

Step 1

Step 2


Put together the Velcro on the base with that on the Tensaflex. Leave both sides slightly open.



Step 2

Step 3


Place each of the shelves (D & E), starting with the lowest one, matching the guiding dots.



Step 3

Step 4

Place Top (C) starting with the guiding dots, firmly pressing the two shells of Velcro against each other. Adjust the Tensaflex so that all the Velcro lines are securely fastened.

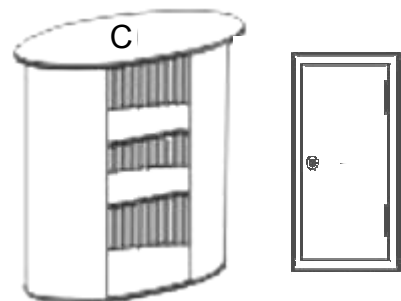

Step 4

To dismantle follow the same steps in reverse order.

Posts

Attach the three parts of the post together. Insert in one of the holes on the Top (A), until it rests on the first shelf (D). Keep in mind that the Velcro lines on top of the posts should be in front of the SOLO, so that you can place the header.

Locking Door

Detach the Tensaflex (A), two inches from each side. Place the door on the base, open the door and press the doorframe's Velcro against that on the Tensaflex.

NOTICE

Different types of light may affect the appearance of the SOLO. If you notice shading or color variations on the fabric once you assemble the product, re-assemble the unit reversing the vertical direction of the Tensaflex. For final detailing lightly brush the fabric.