

KIPICT555



 Display size
55"


All-in-One Kiosk Powered by BrightSign®

Peerless-AV's new All-in-One Portrait Kiosk is the ideal solution for a variety of digital signage applications, such as retail, hospitals, public spaces, government and much more. This kiosk, powered by BrightSign®, delivers flawless Full HD 1080p60 single video decoding, HTML support, networked content playback, as well as an abundant set of features like interactivity via the GPIO port, remote snapshot, live text, media feeds and multi-zone. The kiosk's sleek, stylish design offers the ruggedness needed for public use, and simple installation and maintenance.

Engage your audience with Peerless-AV's sleek, interactive All-in-One Kiosk, powered by BrightSign®, which allows for six simultaneous points of interaction.

Additional Features

- ✓ All-in-one LCD digital touch kiosk powered by BrightSign® to design and publish interactive or non-interactive content
- ✓ Quick and easy set-up via microSD card, USB, Wi-Fi, Bluetooth or cable
- ✓ Six point IR touch to engage your audience
- ✓ Standard HTML5 engine supports flawless playback of content and modular assets layered with video
- ✓ Full HD video and audio streaming
- ✓ Easily update messaging and interact with the kiosk using your iPad or iPhone
- ✓ Remotely control and interact with the kiosk via Ethernet or WiFi
- ✓ Link kiosk to any live data and media feeds available to display

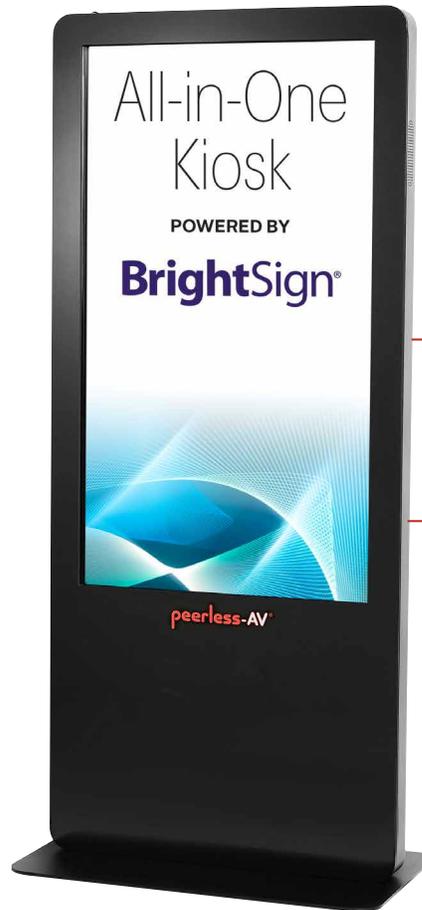

■ **POWERED BY BRIGHTSIGN®**
Use BrightAuthor to create and publish digital signage presentations

■ **ULTRA SLIM DESIGN**
Sleek and stylish, but rugged enough to be installed in any application



Keyed-Alike Cam Locks



Ultra-Thin, Sleek Design



KIPICT555 All-in-One Kiosk Powered by BrightSign®

Display

SCREEN SIZE	55" Diagonal
ASPECT RATIO	16:9
BRIGHTNESS	450cd/m ²
VIEWING ANGLE	178°
RESPONSE TIME	9ms
REFRESH RATE	120Hz
RESOLUTION	1920 x 1080
CONTRAST RATIO	5000:1
PICTURE ADJUSTMENT	Brightness/Contrast/Color/Sharpness/Tint/Color Temperature
PICTURE MODE	Dynamic/Standard/Mild/User
COLOR TEMPERATURE	Cool/Medium/Warm/User

SCREEN ADJUSTMENT	Normal
CLOCK, SLEEP TIMER	Yes
SOFTWARE	BrightAuthor by BrightSign
INTEGRATED PLAYER	BrightSign HD1022
SD SLOT	SDHC
CONTROL	GPIO
WIFI	Yes
BLUETOOTH	Yes
USB	2.0 (x2)
LAN	RJ45 (12/100)
AUDIO OUT	3.5mm Stereo Mini Jack
SPEAKERS	Included 6W x 2 AT 8Ω

SUPPORTED MEDIA:

VIDEO	AVI, MP4, TS, TRP, MKV, MOV, MPG, DAT, VOB
CONTROL	GPIO
IMAGE	BMP, JPG, JPEG, PNG
AUDIO	MP3
POWER	AC 100-240 V (50HZ-60HZ)
POWER CONSUMPTION	60W
OPERATING TEMPERATURE	32-122°F (0-50°C)
LISTINGS	ETL, FCC, CE

Interactive

INTERACTIVE TECHNOLOGY	IR
TOUCH POINTS	16:9
BRIGHTNESS	6 Point


Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	FINISH	AVAILABLE COLORS
KIPICT555	34.00" x 75.06" x 19.00" (864 x 1907 x 483mm)	194lb (88kg)	Smooth	Gloss Black

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
KIPICT555	38.19" x 83.07" x 21.14" (970 x 2110 x 537mm)	211lb (96kg)	735029317135	Kiosk, Power Cord, Remote Control, Quick Start Guide	1

All dimensions = inch (mm)

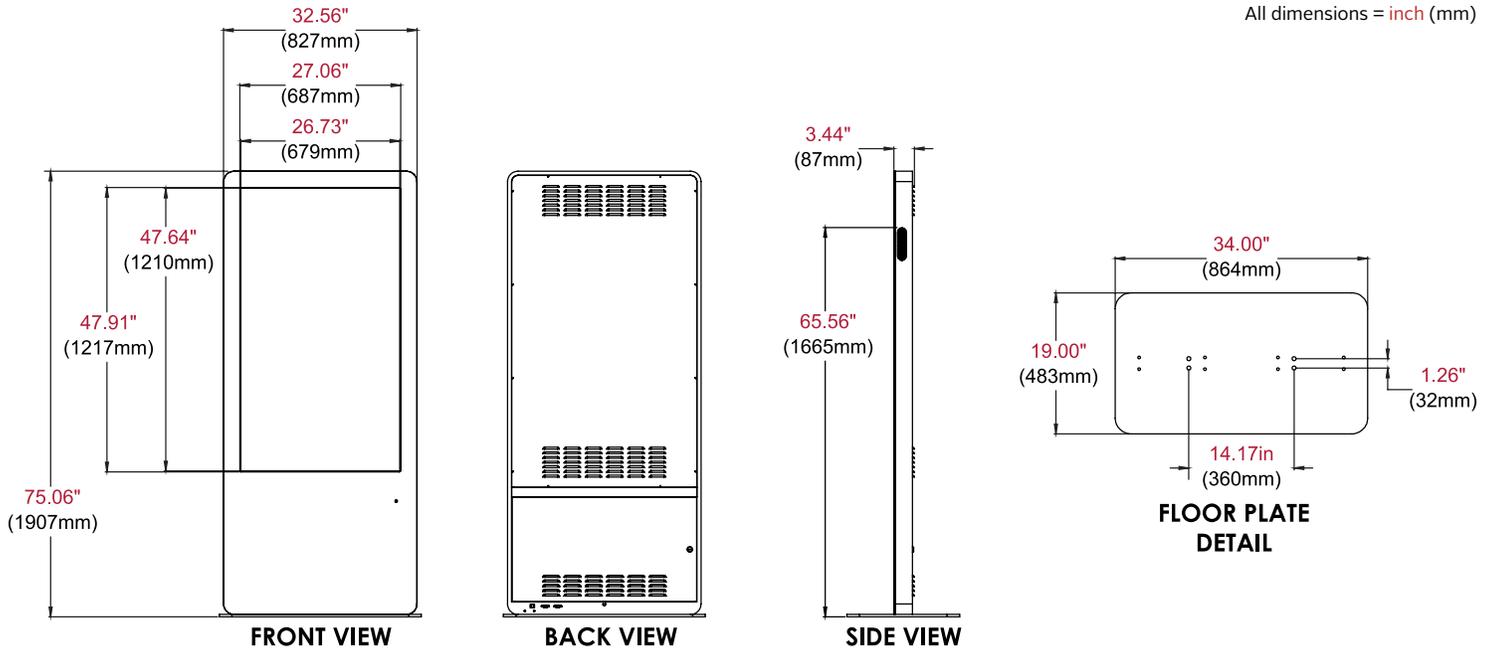

Architect Specifications

The All-in-One Kiosk Powered by BrightSign® shall be a Peerless-AV® model KIPICT555 and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502 USA

(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV Europe
Unit 3 Watford Interchange
Colonial Way, Watford
Herts, WD24 4WP
United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV de México
Ave de las Industrias 413
Parque Industrial Escobedo
Escobedo, N.L.,
Mexico 66050
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360

