# LUMIÈRE CONFIGURATION - E (NO LIGHTS)

PRODUCT CODE: LI W15ENI





On frame On graphic







#### PRODUCT DESCRIPTION

Introducing the Lumiere Light Wall! A combination of innovative silicone-edge graphics and RPL fabric pop ups offers an easier and more cost effective SEG option. This SEG style display has the depth of the RPL so you can expose more of your message using endcap graphics. The Lumiere shrinks down in size - simply collapse the geometric frame and the SEG bungeed channel bars, and fold or roll the fabric graphics. Setup can be done by 1 person and in 5-10 minutes. SEG portability is easy and stylish.

5		
DISPLAY DIMENSION	118.1" W x 117" H x 14.5" D	
GRAPHIC DIMENSIONS		
4X3 MAIN GRAPHICS	118.5" W x 89" H (4 Graphics)	
4X3 END CAP GRAPHICS	14.25" W x 89" H (4 Graphics)	
FRAME CONFIGURATION QUANTITY		
4X3 FRAME	2 F	rames
GRAPHIC MATERIAL		
Stretch Fabric		
GRAPHIC FINISHING		
Silicone beading is sewn around the perimeter of the fabric graphic. Silicone beading is hidden from view once installed.		
DISPLAY CONSTRUCTION		
Aluminum Frame		
SHIPPING WEIGHTS & DIMENSIONS		
4x3 Lumiere Light Wall (2 boxes total)		
Shipping Weight	35 lbs (frame only) (each box) 39 lbs (with graphics) (each box)	
Shipping Dimensions	34" L x 14" W x 9" H (each box)	
GRAPHIC TURN AROUND TIME		
2 business days after proof approval		
AVAILABILITY		CA and PA


Straight Connector

## LUMIÈRE CONFIGURATION - E (NO LIGHTS)




# LUMIÈRE CONFIGURATION - E (NO LIGHTS)

PRODUCT CODE: LLW15ENL

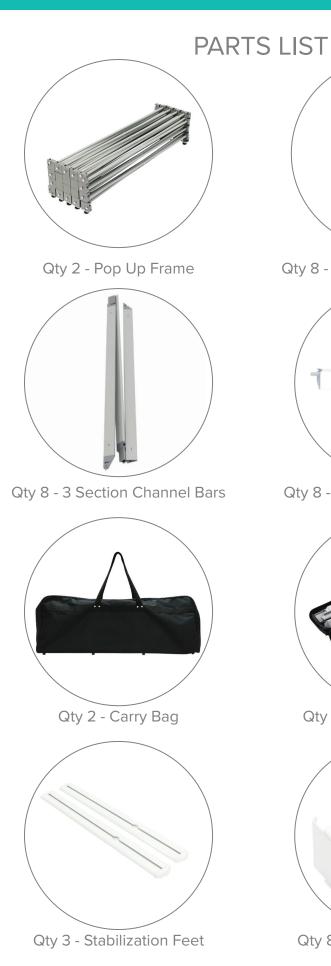



Qty 8 - 4 Section Channel Bars







Qty 2 - Channel Bar Bag



PRODUCT CODE: LLW15ENL


## SET UP INSTRUCTIONS

#### Set Up Pop Up Frame



**a.** Place frame with the adjustable feet facing down.


#### **Insert Channel Bars**




**a.** Expand each channel bar. Follow bungee to connect.

- **b.** Expand the frame.

**b.** Attach channel bars to frame.

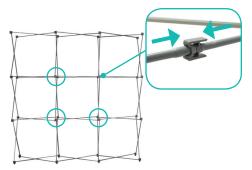

**c.** Close frame by pushing the outside of the frame until male and female ends connect.



**c.** Slide channels bars onto frame, from top to bottom, then secure onto metal peg.




**d.** Attach the top and bottom endcaps on each side of the frame.

#### **Install Graphic**



**a.** In each corner, insert the silicone edge beading into the groove.

#### **Optional Accessories**

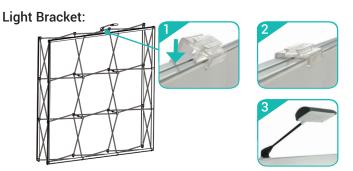


**a.** Snap the LED Light Bracket on top of the frame. Then slide the LED Light onto the bracket.



**b.** Then insert the remainder of the beading.




c. Repeat graphic installation on the end caps.

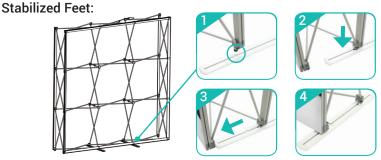

**a.** From the back, lift frame and insert adjustable feet onto stabilized feet. Then slide stabilized feet toward and insert onto the adjustable feet.

# SET UP INSTRUCTIONS

#### **Connecting Top Walls**

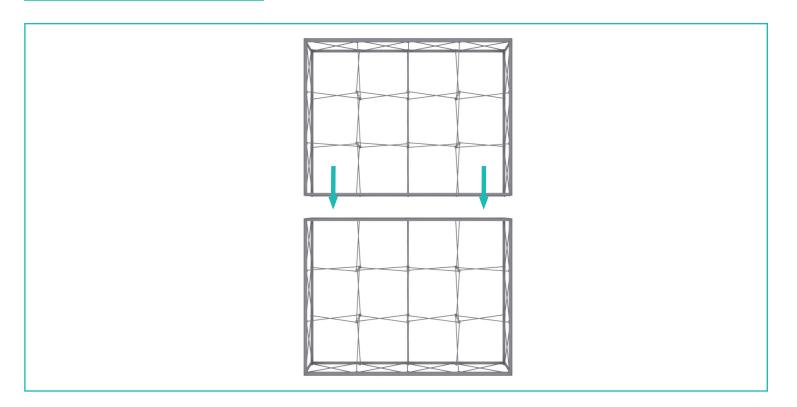

Place the 4x3 frame on top of the 4x3 frame. **Note:** 2 people are required to hold each side of the top frame while the third person secrues with the Straight Connectors. **Note:** Rendering shown without graphics for clarity. 4x3 front side graphic must be installed first before placing the frames on top.

#### **Straight Connection**



\*Starting from behind, make sure the frames are flushed next to each other.







Slide Straight Connector onto the channel bars of both frames.



Turn dial to the left to lock the Straight Connector in place. Repeat for each vertical sections (8 total).

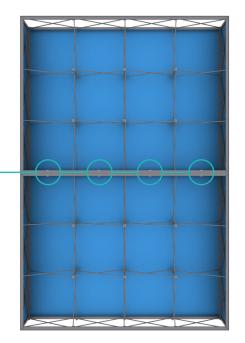

\*Back side of the stacked 4x3 frames shown above.

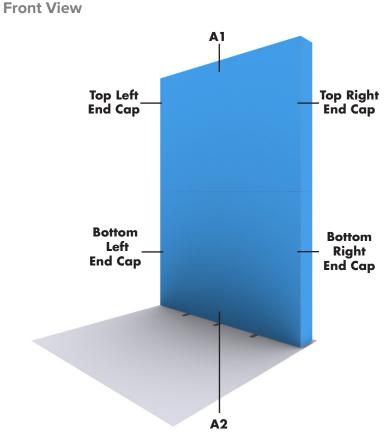

TEMPLATE GUIDE



**Back View** 

