
WLM-ATLANTIC A

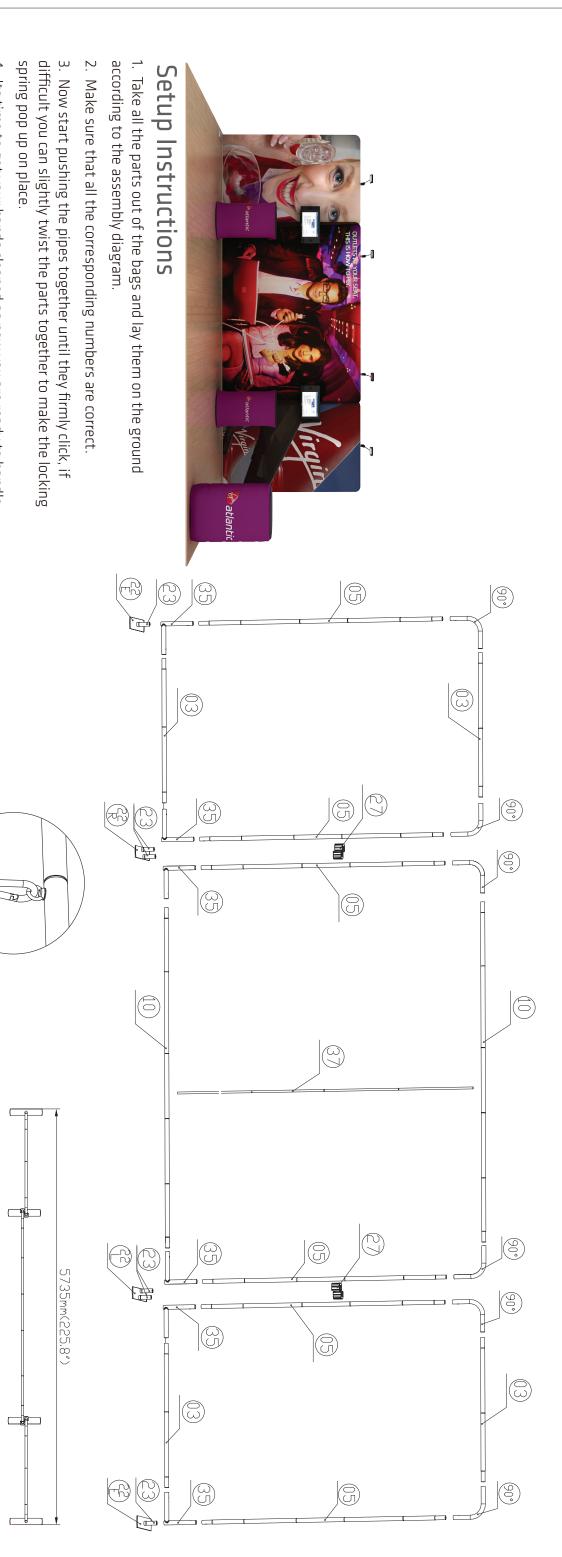

- spring pop up on place. difficult you can slightly twist the parts together to make the locking
- the bottom, now close the Zipper. 4. Its time to get your hands cleaned as now you are ready to handle feed only a few feet, then stand the frame up then slide the fabric to the printed fabric. Feed the fabric from the round edges of the frame
- 5. You can set up the feet in the position that you want to erect the stand, lift the fabric panels and fit on the feet

Monitor

Monitor Cord

1448mm(57"

2000E

2000F

.448mm(57")

2259mm(88.9")

Media Cable

5677mm(223.5")

- 6. To lock the frames together you can use the "S" shaped brackets, they are designed tight so they lock well.
- clear plastic clips. 7. If you have a header in the kit you can fix to the top by using the

NO. Qu	03	05)	10	23	27 2	Ŧ
antity	4	တ	2	6	2	Frame
NO. Quantity Confirm NO.	35	37	(22) (E)	(22)	(22) (R2)	
Quantity Confirm NO.	6		2		1	Frame
NO.	90°					
Quantity C	6					Frame
onfirm						
NO.						
Quantity Confirm						Frame
NO.			\			
Quantity Co						Frame
onfirm			\			
NO.						
Quantit					\	Frame
y Confi						Ф
rm /			4	ယ	22	
0.			40"	32"	22.6"	7
Confirm						TV kit
NO.				CA500	CA900	Shipp
Confirm						Shipping Case accessories

WLM-ATLANTIC B – Straight Header



(5)

Setup Instructions

- 1. Take all the parts out of the bags and lay them on the ground according to the assembly diagram.
- 2. Make sure that all the corresponding numbers are correct.
- 3. Now start pushing the pipes together until they firmly click, if difficult you can slightly twist the parts together to make the locking spring pop up on place.
- 4. Its time to get your hands cleaned as now you are ready to handle the printed fabric. Feed the fabric from the round edges of the frame, feed only a few feet, then stand the frame up then slide the fabric to the bottom, now close the Zipper.
- 5. You can set up the feet in the position that you want to erect the stand, lift the fabric panels and fit on the feet.
- 6. To lock the frames together you can use the "S" shaped brackets, they are designed tight so they lock well.

Excess Media Ca

Monitor Cord

1448mm(57")

2951mm<116,2°

.448mm(57")

2259mm(88.9")

2000€

2000F

2000E

Monitor

Media Cable

D C


5735mm(225,8″)

5677mm(223,5")

2876mm(113.2")

2011A

7. If you have a header in the kit you can fix to the top by using the clear plastic clips.

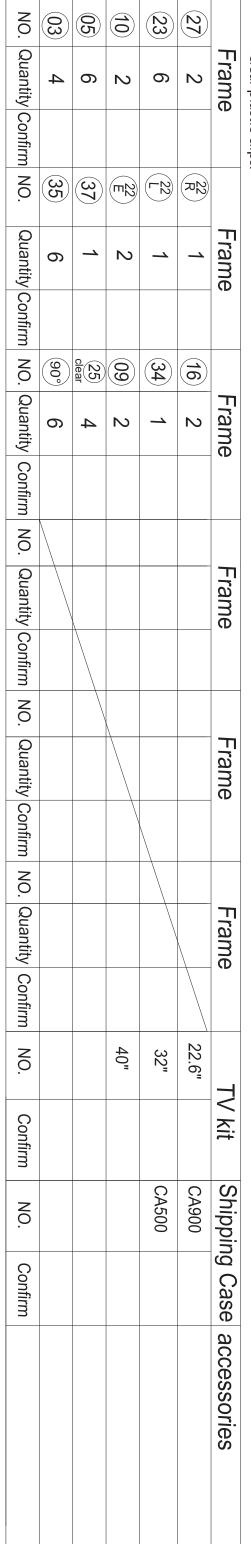

WLM-ATLANTIC C – Curved Header



Setup Instructions

- according to the assembly diagram. 1. Take all the parts out of the bags and lay them on the ground
- 2. Make sure that all the corresponding numbers are correct.
- spring pop up on place. difficult you can slightly twist the parts together to make the locking 3. Now start pushing the pipes together until they firmly click, if
- 4. Its time to get your hands cleaned as now you are ready to handle the printed fabric. Feed the fabric from the round edges of the fabric to the bottom, now close the Zipper. frame, feed only a few feet, then stand the frame up then slide the
- stand, lift the fabric panels and fit on the feet 5. You can set up the feet in the position that you want to erect the
- they are designed tight so they lock well. 6. To lock the frames together you can use the "S" shaped brackets,
- clear plastic clips. 7. If you have a header in the kit you can fix to the top by using the

