
## WLM-ATLANTIC A

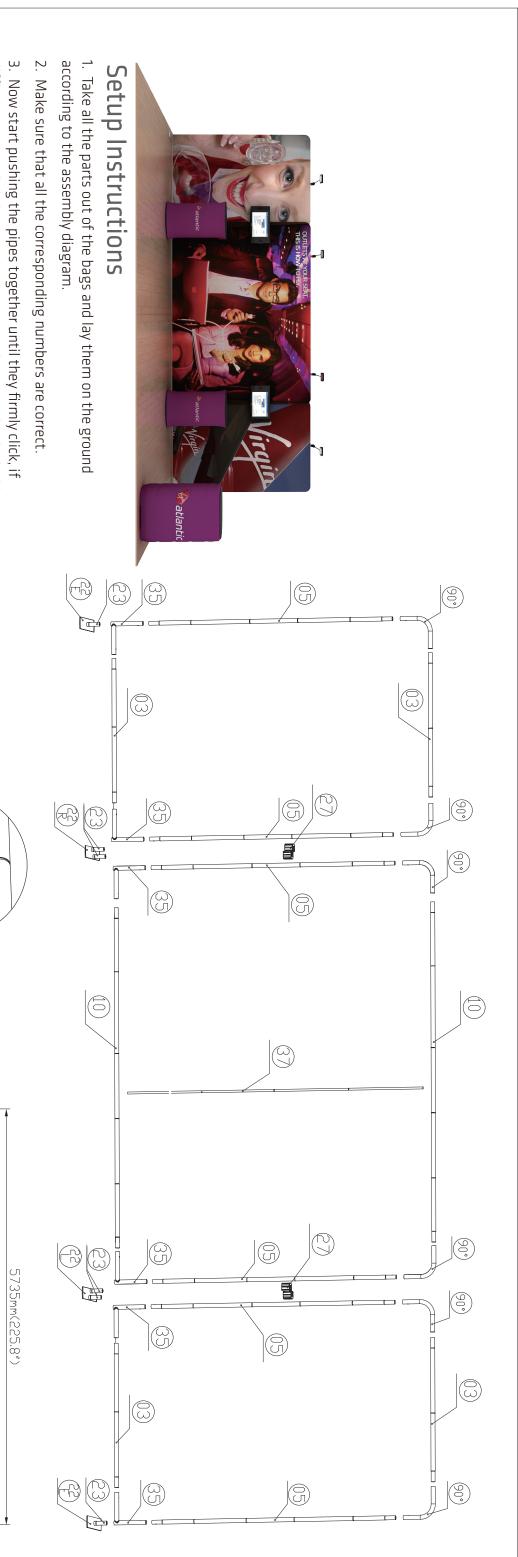

- 3. Now start pushing the pipes together until they firmly click, if difficult you can slightly twist the parts together to make the locking spring pop up on place.
- 4. Its time to get your hands cleaned as now you are ready to handle the printed fabric. Feed the fabric from the round edges of the frame, feed only a few feet, then stand the frame up then slide the fabric to the bottom, now close the Zipper.
- 5. You can set up the feet in the position that you want to erect the stand, lift the fabric panels and fit on the feet.

TV kit∫

Sensor Board

TV set

Cord

.448mm(57"

2000E

2000F

.448mm(57")

2259mm(88.9")

Cord

5677mm(223.5")

- 6. To lock the frames together you can use the "S" shaped brackets, they are designed tight so they lock well.
- If you have a header in the kit you can fix to the top by using the clear plastic clips.

NO. Qu	03	05)	10	23	27	Ę
antity	4	0	2	6	2	Frame
NO. Quantity Confirm NO.	35	37	(22) (E)	(22) (L2)	(22) (R)	
Quantity Confirm	6		2	1	1	Frame
NO.	90°					
Quantity (	0					Frame
Confirm						
NO.						
Quantity Confirm						Frame
1 NO.						
Quantity Confirm NO.						Frame
NO.						
Quantity					\	Frame
Confirm NO.			40"	32"	22.6"	Φ
Confirm					п	TV kit
NO.				CA500	CA900	Ship
). Confirm				00	00	Shipping Case accessories